

**INDUSTRIAL@AMPHENOL**  
TRUSTED GLOBALLY

Amphenol Sine Systems, **USA**  
Amphenol Tuchel Industrial, **GmbH**  
Amphenol Audio, **USA**



Featuring Radsok® Technology

# eco | mate® rm

## Rugged Metal Shielded Connectors



RELIABLE SIGNAL AND POWER SOLUTIONS



[www.amphenol-sine.com](http://www.amphenol-sine.com) | +1 800 394 7732



# We Are Amphenol

## Global Interconnect Solution Supplier

For over 80 years Amphenol has enjoyed success as the interconnection technology provider of choice to industry leading companies around the world. Our organization works with leading manufacturers across a wide range of applications - including Energy Generation & Distribution, Transportation, Heavy Equipment, Factory Automation, Wireless Outdoor, Information Technology and Data Communications Equipment, Mobile Devices, Mobile Networks, Broadband Communication, Military and Commercial Aerospace, Industrial, Automotive and Chip Card Readers - enabling smarter, faster and better technologies to connect products to customer solutions.

Our engineers design innovative combinations of industry standard connectors and application specific shielding components to create assembly systems that set the standards for performance, reliability, and cost effectiveness. Our engineering, materials, and manufacturing organizations meet the high standards imposed by ISO 9001:2008 as well as many customer specific quality systems. Our performance has earned us ship to stock and world class performance awards from many major OEMs.

We are one of the largest interconnect solution suppliers in the world and supply a wide range of product solutions globally. The industrial market footprint of Amphenol covers more than 30 countries.



# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors

### Table of Contents

#### We Are Amphenol

|                                       |   |
|---------------------------------------|---|
| Global Interconnect Solution Supplier | 3 |
|---------------------------------------|---|

#### Connector Guide

|  |    |
|--|----|
| Introduction to eco mate <sup>®</sup> rm | 6  |
| Typical Applications                     | 7  |
| Series Overview                          | 8  |
| Connector Configurations                 | 10 |
| Insert Arrangements                      | 12 |
| General Technical Characteristics        | 14 |
| GuardSafe™ Locking Clips                 | 16 |
| Connector Kits                           | 17 |

#### Connector Solutions

|                                  |     |
|----------------------------------|-----|
| 1 POSITION 86A / 630V            | 179 |
| 1 POSITION 120A / 630V           | 183 |
| 1 POSITION 120A - 180A / 630V    | 187 |
| 1 POSITION 120A - 300A / 630V    | 191 |
| 3 POSITIONS 13A / 300V           | 21  |
| 3 POSITIONS 86A / 630V           | 197 |
| 4 POSITIONS 13A / 300V           | 29  |
| 4 POSITIONS 23A / 350V           | 55  |
| 4 POSITIONS 45A / 500V           | 63  |
| 4 POSITIONS MIX 13A & 5A / 350V  | 37  |
| 4 POSITIONS MIX 23A & 13A / 350V | 47  |
| 6 POSITIONS 5A, 7.5A / 150V      | 71  |
| 8 POSITIONS 13A / 250V           | 79  |
| 8 POSITIONS 13A / 300V           | 87  |
| 8 POSITIONS 23A / 375V           | 95  |
| 9 POSITIONS MIX 23A & 13A / 250V | 103 |
| 10 POSITIONS 5A, 7.5A / 150V     | 111 |
| 12 POSITIONS 13A / 300V          | 119 |
| 19 POSITIONS 5A, 7.5A / 150V     | 127 |
| 19 POSITIONS 13A / 300V          | 135 |
| 23 POSITIONS 13A / 300V          | 143 |
| 26 POSITIONS 5A, 7.5A / 150V     | 151 |
| 28 POSITIONS 13A / 300V          | 159 |
| 32 POSITIONS 5A, 7.5A / 150V     | 167 |
| 48 POSITIONS 13A / 300V          | 175 |

#### Contacts

|   |     |
|---|-----|
| Contact Overview                              | 200 |
| Plating and Bulk Order Options                | 201 |
| Stamped & Formed Crimped Contact Part Numbers | 202 |
| PCB Contacts                                  | 204 |
| PCB Contacts Dimensions                       | 206 |
| Machined Standard Crimp Contact Part Numbers  | 207 |
| RADSOK <sup>®</sup> Contacts                  | 209 |



# Table of Contents (con't)

## Tooling

|                                     |     |
|-------------------------------------|-----|
| Machined                            | 212 |
| Stamped & Formed                    | 212 |
| Contact Extraction Tool             | 212 |
| Contact Extraction Tool Table       | 213 |
| Contact Extraction Tool Instruction | 214 |

## Assembly Instructions

|  |     |
|--|-----|
| Jam Nut Assembly and Installation Instructions   | 215 |
| Flange Assembly and Installation Instructions  | 216 |
| eco   mate <sup>®</sup> rm Standard Product Straight Plug and Receptacle Cable Assembly          | 217 |
| eco   mate <sup>®</sup> rm Standard Product Straight Plug and Receptacle with End Cap            | 219 |
| eco   mate <sup>®</sup> rm Standard Product Right Angle Plug and Receptacle Cable Assembly       | 220 |
| eco   mate <sup>®</sup> rm with RADSOK <sup>®</sup> Straight Plug Cable Assembly                 | 222 |
| eco   mate <sup>®</sup> rm with RADSOK <sup>®</sup> Straight Plug - Shell Size 12 Cable Assembly | 223 |
| eco   mate <sup>®</sup> rm with RADSOK <sup>®</sup> 90° Plug Cable Assembly                      | 224 |

## Technical Data

|   |     |
|---|-----|
| RADSOK <sup>®</sup> Product Overview  | 226 |
| RADSOK <sup>®</sup> Advantages and Custom Developed Solutions               | 227 |
| RADSOK <sup>®</sup> Series Rated Current and Working Voltage                | 228 |
| RADSOK <sup>®</sup> Series Dynamic Overload Tests at Different Temperatures | 229 |
| eco   mate <sup>®</sup> rm Rated Current and Working Voltage                | 230 |
| UL94 + UL1977 Industry Standards  | 231 |
| IP Codes  | 232 |
| Crimp Connection  | 233 |
| Composition and Dimensions of Copper Wires                                  | 234 |
| Reduction Values  | 235 |
| Voltage Grading of Connectors   | 236 |
| Creepage Distance   | 237 |

## Appendix

|                   |     |
|-------------------|-----|
| Glossary of Terms | 239 |
| Part Number Index | 241 |

# Introduction to eco|mate<sup>®</sup> rm

## Quick Reliable Mating

### Bayonet Coupling

With a quick twist of the bayonet coupling system, these connectors provide positive tactile feedback to insure confident mating. This feature also reduces time and labor during installation.

## Economical and Flexible

### Mixed Power & Signal Layouts

Power and signal contacts can be combined in a variety of inserts providing a highly flexible interconnect solution to reduce system complexity and minimize installation costs.

## Waterproof

### IP67

Ideal for temporary submersion, (achieving IP67) where water and dust protection are needed.

## Corrosion Resistant

### Salt Spray Standard Nickel 48 Hours, Black or Green Zinc 96 Hours

Designed to withstand climate ingress and exposure to salt spray or a corrosive atmosphere while still maintaining mechanical and electrical functionality.

## Wide Ranging Contact System

### Flexible Contact Solutions

Our contact system offers the flexibility of using a wide variety of contact styles and wire gauges within various connectors, shell sizes and insert layouts, providing customers with a total solution.

# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors

### Typical Applications



Instrumentation Measurement



Robotics - Machine Tools



Building Automation & Control



Telecom -Data Infrastructure



Welding



Medical



Aerospace



Energy - Power



Military



Automotive



Off Road - Mining - Railway



Electric Vehicles



# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors



### Series Overview

The eco|mate<sup>®</sup> rm series is the connector of choice wherever there are demanding interconnect architectures. The multi-way connectors are available in 7 shell sizes and 25 insert arrangements with a variety of wire gauge options. It is the high performance, cost effective solution of choice for our customers.

The series includes two kinds of connectors: Standard Products and High Amperage. Standard Products are widely used, standardized connectors, while the High Amperage connectors are designed to endure large currents and high voltage. Typically used within hybrid electric vehicles, High Amperage connectors are available in single pole, high power arrangements featuring RADSOK<sup>®</sup> technology. RADSOK<sup>®</sup> products are offered exclusively by Amphenol. Custom developed solutions are available in both styles.

Our eco|mate<sup>®</sup> rm products are designed to be a competitive alternative to other industry standard products while maintaining the best possible mechanical and environmental quality on the market. Our eco|mate<sup>®</sup> rm products feature IP67 environmental sealing qualities, rugged

nickel plated aluminum outer shells and bayonet locking systems that require only a 1/3 turn. An audible locking “click” indicates proper installation.

The versatility of having three available contact styles allows for a broad variety of insert arrangements.

- Machined
- Stamped & Formed
- Power

The eco | mate<sup>®</sup> rm Standard Product is our standard rugged metal shielded circular connector series available in 7 shell sizes and multiple insert arrangements.

The high amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> technology is our single pole power connector series ranging from 86A to 300A.

eco|mate<sup>®</sup> rm industrial grade circular connectors are manufactured to be intermateable with other industry standard connectors. All connectors are RoHS compliant. The eco|mate<sup>®</sup> rm Series meets the standards of UL1977. The file number is E491265.





eco | mate® rm Standard Products  
starting on page 21

## eco | mate® rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C  
Operating Temperature: -40°C to +125°C  
(for parts with a silicone seal, ending in 03)
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- High-Density Contact Arrangements Available
- UL ECBT2 Certified



eco | mate® rm High Amperage Products  
starting on page 179

## High Amperage eco | mate® rm with RADSOK® Technology

- Single Pole High Power Arrangements
- 3.6mm-10mm Contact Sizes
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- 4 Shell Sizes
- Operating Voltage: 630V
- Current Rating at 25°C: 86A-300A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors

### Connector Configurations

End Cap for Individual Wire Sealing



Short Cable Gland



Long Cable Gland



Right Angle Cable Gland



Overmolded



Choice of Contacts

- Machined
- Stamped and Formed



Plug



Custom Solutions Available For:

- Various Applications
- Extreme Environments
- Reducing the Number of Suppliers
- Molded Strain Relief
- Minimize Stress on Conductors
- 360 ° Shielding Available
- Custom Logo
- Enhanced Sealing Properties

Contact the Factory to learn more


eco | mate<sup>®</sup> rm Series



Plug Kit includes Connector, Backshell and Contacts

# Connector Guide

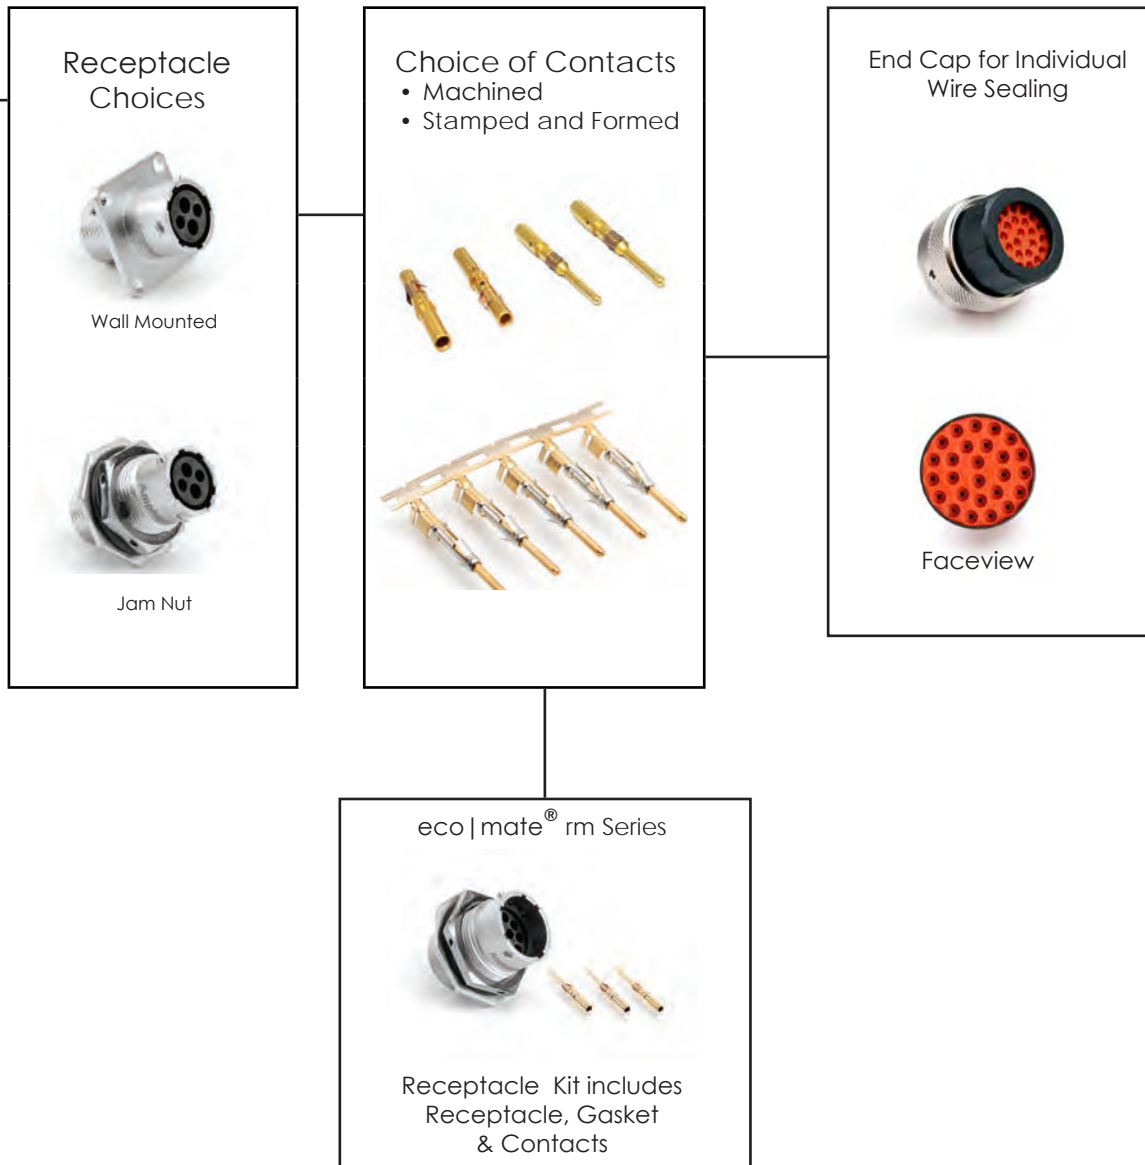
















Connector Solutions:  
see page 19 for parts grouped by insert arrangement



# eco|mate<sup>®</sup> rm








## Rugged Metal Shielded Connectors

### Insert Arrangements

| Shell Size | RTO   |  |  |  | RTHP   |  |  |
|------------|---|--|--|--|--|--|--|
|            | Contact #16 (Ø 1.6)   | Mixed Power & Signal   | Contact 2.5mm  | Contact #20 (Ø 1.0)  | Single Pin Power RADSOK <sup>®</sup>   |  |  |
| 10         |  <p>4 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 29</p>         |  <p>4 positions<br/>Contact #16 (Ø 1.6)<br/>&amp; #20 (Ø 1.0)<br/>13A &amp; 20# 5A<br/>350V AC/DC<br/>see page 37</p> | Consult factory  |  <p>6 positions<br/>Contact #20 (Ø 1.0)<br/>5A, 7A(machined)<br/>150V<br/>see page 71</p> | Consult factory  |  |  |
| 12         |  <p>3 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 21</p>        |  <p>8 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 79</p>   | Consult factory  | Consult factory  |  <p>1 position<br/>Contact 3.6mm<br/>86A 630V AC/DC<br/>see page 179</p>                       |  |  |
| 14         |  <p>8 positions<br/>Contact #16 (Ø 1.6)<br/>13A<br/>300V AC/DC<br/>page 87</p> |  <p>12 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 119</p>  |  <p>4 positions<br/>Contact 2.5mm<br/>#16 (Ø 1.6)<br/>23A &amp; 13A<br/>350V AC/DC<br/>see page 47</p>        | Consult factory  |  <p>4 positions<br/>Contact 2.5mm<br/>23A<br/>350V AC/DC<br/>see page 55</p>                   |  <p>19 positions<br/>Contact #20 (Ø 1.0)<br/>5A, 7.5A(machined)<br/>150V<br/>see page 127</p> |  <p>1 position<br/>Contact 6mm<br/>120A<br/>630V AC/DC<br/>see page 183</p> |
| 16         |  <p>19 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 135</p>     |  <p>4 positions<br/>Contact #8 (Ø 3.6)<br/>45A<br/>500V AC/DC<br/>see page 63</p>                                   |  <p>9 positions<br/>Contact 2.5mm &amp;<br/>#16 (Ø 1.6)<br/>23A &amp; 13A<br/>350V AC/DC<br/>see page 103</p> | Consult factory  |  <p>26 positions<br/>Contact #20 (Ø 1.0)<br/>5A, 7.5A(machined)<br/>150V<br/>see page 151</p> |  <p>1 position<br/>Contact 8mm<br/>120A - 180A<br/>630V AC/DC<br/>see page 187</p>            |  |



# Connector Guide

| Shell Size | RTO   |                      |  | RTHP   |  |
|------------|---|----------------------|--|--|--|
|            | Contact #16 (Ø 1.6)   | Mixed Power & Signal | Contact 2.5mm  | Contact #20 (Ø 1.0) or Contact 3.6mm   | Single Pin Power RADSOK®   |
| 18         |  <p>23 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 143</p>   | Consult factory      |  <p>8 positions<br/>Contact 2.5mm<br/>23A 375V AC/DC<br/>see page 95</p> |  <p>32 positions<br/>Contact #20 (Ø 1.0)<br/>5A, 7.5A 150V<br/>see page 167</p> | Consult factory  |
| 20         |  <p>28 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 159</p> | Consult factory      | Consult factory  | RTHP   |  |
|            |   |                      |  |  <p>3 positions<br/>Contact 3.6mm<br/>86A 630V<br/>see page 197</p>           |  <p>1 position<br/>Contact 10mm<br/>120A - 300A 630V<br/>see page 191</p> |
| 24         |  <p>48 positions<br/>Contact #16 (Ø 1.6)<br/>13A 300V<br/>see page 177</p> | Consult factory      | Consult factory  | Consult factory  | Consult factory  |

Insert Arrangements are Pin Faceview

# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors

### General Technical Characteristics



### Materials

- **Zinc Alloy Shells**
- **Metal Alloy Backshells and Cable Glands**
- **Aluminum Alloy, Nickel Plated Coupling Ring**
- **Stainless Steel Coupling Spring**
- **Contacts Plating Options**
  - Gold Flash over Tin
  - Tin
  - Silver
  - 5 $\mu$ , 10 $\mu$ , 15 $\mu$ , 30 $\mu$
  - Gold Flash
  - Other platings on request
- **Insulation Resistance**
  - 5000 megohms minimum of 25° C
- **Insulation Inserts**
  - Thermoplastic, UL94 V-0

### Environmental

- **IP67**
- **Operating Temperature**
  - 40° to 105° C - Standard Products with NBR Seal
  - 40° to 125° C -Standard Products with Silicone Seal
  - 40° to 125° C -High Amperage Products with RADSOK<sup>®</sup> technology
- **Flammability Rating** UL94 V-0
- **Salt Spray**
  - Per MIL-STD-202 method 101
  - 48 h ( standard version)
  - 96 h (black anodized coupling ring)
  - Higher salt spray resistance (200/500h) upon request
- **Sealing**
  - In mated condition and in combination with sealed backshell
- **Fluid Resistance**
  - Gas, oil, mineral oil, acid bath, basic bath

# Connector Guide



## Electrical

- **In Accordance With**  
UL 1977: Certificate ECBT2  
File number: E491265
- **More information**  
see "Technical Section" starting on  
page 228

## Mechanical

- **Durability**  
RT Series : >500 mating cycles  
RTHP Series: >100 mating cycles
- **Vibration**  
10-2000 Hz, level of 20 G's
- **Thermal Shock**  
No cracking, chipping or leaking after 20  
test cycles from -55°C to 125°C
- **Contact Resistance**  
#16 <6 mΩ  
#20 <15 mΩ  
eco | mate® rm with RADSOK® < 1m Ω

# Connector Guide

## GuardSafe™ Locking Clips

Amphenol's **GuardSafe™ Locking Clips** are designed to complement the **eco|mate® rm** multi-way connector and **Amphenol PT\26482 Series** cylindrical metal bayonet coupling systems, and are suitable for many rough, harsh environmental applications. Featuring non-corrosive, plastic construction with clamshell functionality, they are resistant to brake and transmission fluid, oils, grease, salt, dirt and other contaminants. Compliant with new FM standards, the GuardSafe™ Locking Clip offers an extra layer of protection from an inadvertent uncoupling of the connector.



### Cost Effective Safety Protection

**GuardSafe™ Locking Clips** render quick disconnections not “normally arching” by eliminating access to the coupling nut and requiring a tool for removal.

### Easy to Use

User-friendly, easy to install and service.

### Suitability

**GuardSafe™ Locking Clips** are suitable to be used with wiring methods in accordance with Class I, Division 2 wiring practices per the National Electric Code (NEC), ANSI\NFPA 70, Article 501.4(B).

#### Installation:

Locate the clip over the connector coupling nut with the lanyard towards the plug adapter as shown. Close the safety clip.

#### Removal:

Locate a screwdriver on first latch as shown. Push down the latch then twist the screwdriver. Repeat actions for second latch.



Locking Clips are also Compatible with **Amphenol PT\26482 Series** Cylindrical Metal Bayonet Coupling Systems!

Go to [www.amphenol-sine.com](http://www.amphenol-sine.com) for more information about the PT Series

#### eco|mate® rm

| Shell Size | Part #    |
|------------|-----------|
| 10         | 108039110 |
| 12         | 108039112 |
| 14         | 108039114 |
| 16         | 108039116 |
| 18         | 108039118 |
| 20         | 108039120 |
| 22         | 108039122 |
| 24         | 108039124 |



# Connector Guide

## Connector Kits

**Q:** Why are we offering "kits"?

**A:** Making "kits" available to our customers allows for reducing the number of part numbers necessary for any given project, whether for in-house production or field serviceable applications.

Amphenol's **eco|mate® rm Rugged Metal Shielded Connector Kits** offer mated multi-way connector parts available in 6 shell sizes and 12 insert arrangements, with a variety of wire gauge options. **eco|mate® rm** industrial circular connectors are designed to be intermateable with other industry standard connectors. All connectors are RoHS compliant.

### Market Applications:

- Instrumentation Measurement
- Robotics
- Machine Tools
- Building Automation & Control
- Telecom - Data Infrastructure
- Welding
- Medical
- Aerospace
- Energy Power
- Military
- Automotive
- Off Road
- Mining
- Railway
- Electric Vehicles



### Plug Kit

Including Connector, Backshell & Contacts



### Square Flange Receptacle Kit

Including Receptacle, Gasket & Contacts



### Jam Nut Receptacle Kit

Including Receptacle & Contacts

### eco|mate® rm Kits

- 6 shell sizes/12 insert configurations
- Insert arrangements from 4-32 contacts
- Operating voltage of 150V or 300V
- Current rating: 5A, 7.5A(machined) or 13A (signal contacts)
- Alternate keying positions available
- Plastic inserts with flammability rating of UL94-V0





# eco|mate® rm

## Rugged Metal Shielded Connectors

### Connector Solutions

#### eco|mate® rm Standard Products

|                                  |     |
|----------------------------------|-----|
| 3 POSITIONS 13A / 300V           | 21  |
| 4 POSITIONS 13A / 300V           | 29  |
| 4 POSITIONS MIX 13A & 5A / 350V  | 37  |
| 4 POSITIONS MIX 23A & 13A / 350V | 47  |
| 4 POSITIONS 23A / 350V           | 55  |
| 4 POSITIONS 45A / 500V           | 63  |
| 6 POSITIONS 5A / 150V            | 71  |
| 8 POSITIONS 13A / 250V           | 79  |
| 8 POSITIONS 13A / 300V           | 87  |
| 8 POSITIONS 23A / 375V           | 95  |
| 9 POSITIONS MIX 23A & 13A / 250V | 103 |
| 10 POSITIONS 5A, 7.5A / 150V     | 111 |
| 12 POSITIONS 13A / 300V          | 119 |
| 19 POSITIONS 5A, 7.5A / 150V     | 127 |
| 19 POSITIONS 13A / 300V          | 135 |
| 23 POSITIONS 13A / 300V          | 143 |
| 26 POSITIONS 5A, 7.5A / 150V     | 151 |
| 28 POSITIONS 13A / 300V          | 159 |
| 32 POSITIONS 5A, 7.5A / 150V     | 167 |
| 48 POSITIONS 13A / 300V          | 175 |

#### High Amperage eco|mate® rm with RADSOK® Technology

|                               |     |
|-------------------------------|-----|
| 1 POSITION 86A / 630V         | 179 |
| 1 POSITION 120A / 630V        | 183 |
| 1 POSITION 120A - 180A / 630V | 187 |
| 1 POSITION 120A - 300A / 630V | 191 |
| 3 POSITIONS 86A / 630V        | 197 |

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

**Jam Nut Receptacles**



**OR**  
**Square Flange Receptacles**



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



**Plug**



**Backshell**



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 26




Shell Size: 12    Number of Contacts: 3    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

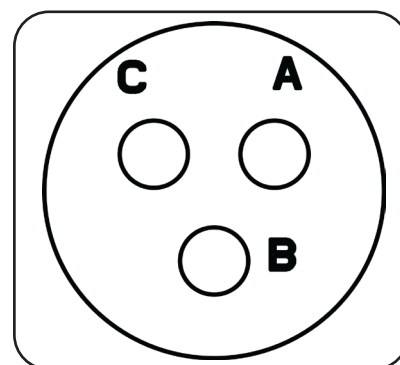

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07123PNH   | RT07123SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07123PNHEC | RT07123SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT07123PNH-K | RT07123SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT06123PNH   | RT06123SNH   | Plug   | 6               | 7      |
| RT06123PNHEC | RT06123SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT06123PNH-K | RT06123SNH-K | Plug Kit   | 6               | 7      |
| RT00123PNH   | RT00123SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00123PNHEC | RT00123SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT00123PNH-K | RT00123SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 26

\*\*See page 23 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-12CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RTOS-12CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RTOL-12CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RTOL-12CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RTOB-12CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RTOB-12CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 12      Number of Contacts: 3  
 Sealing: IP67      Salt Spray: 48h





Contact Size: 16

### Dimensions Jam Nut Receptacle

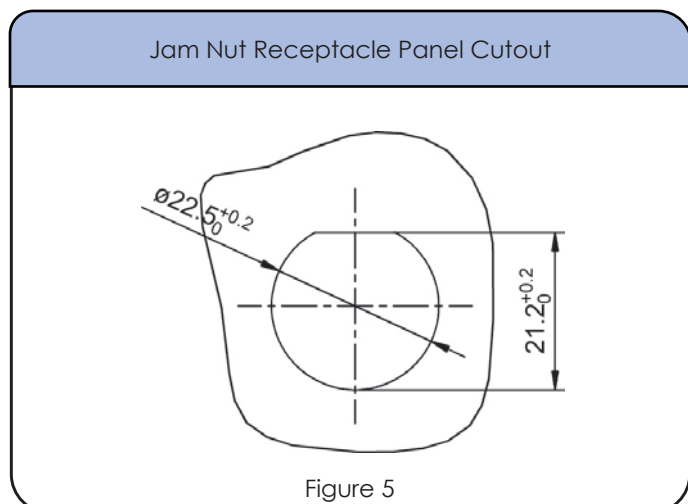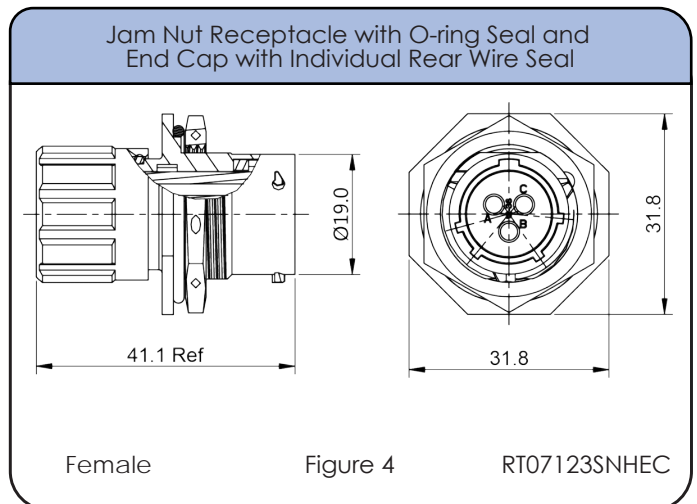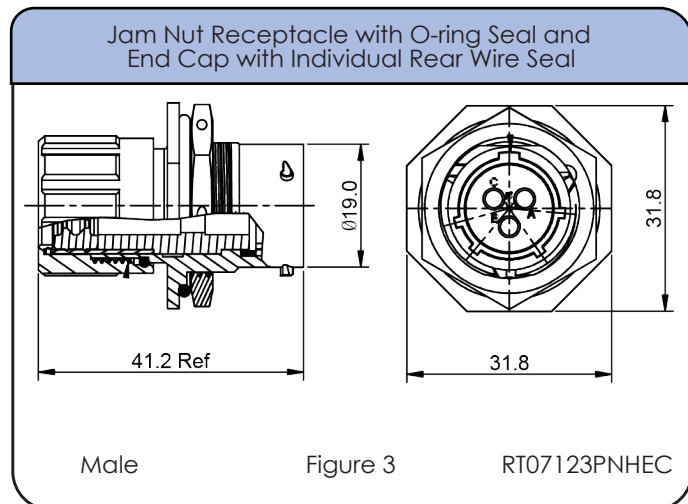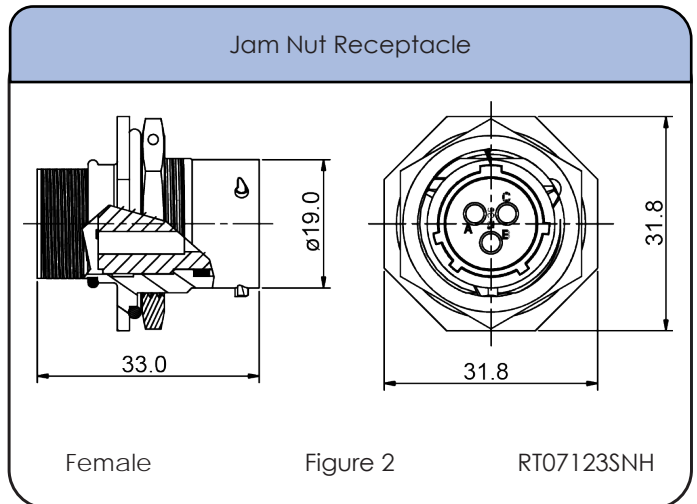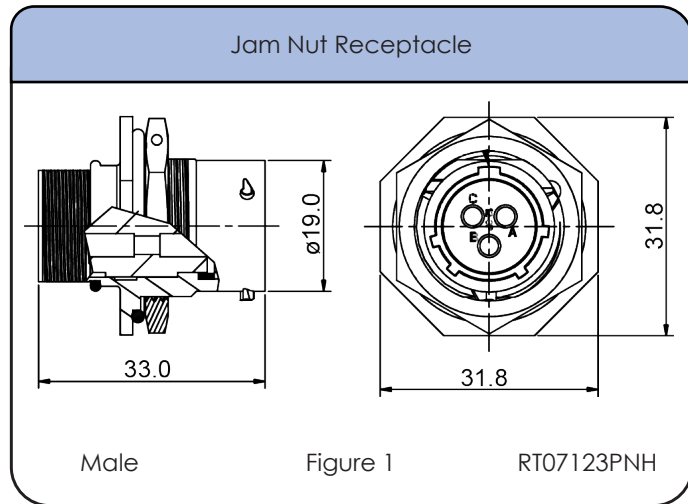

Shell Size: 12      Number of Contacts: 3      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Dimensions Plug


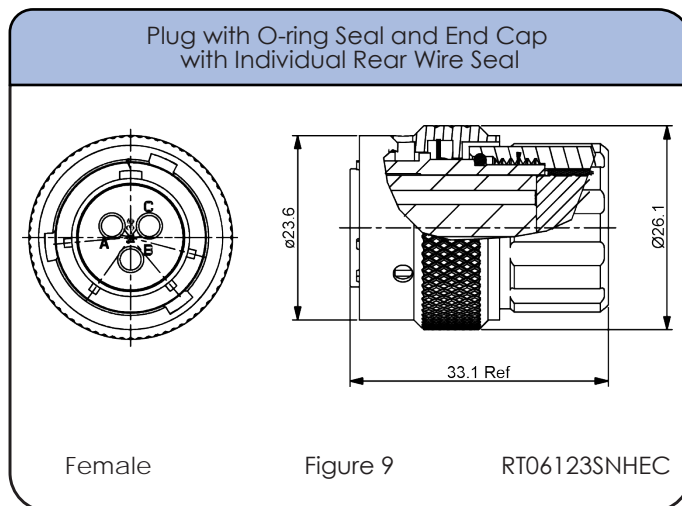
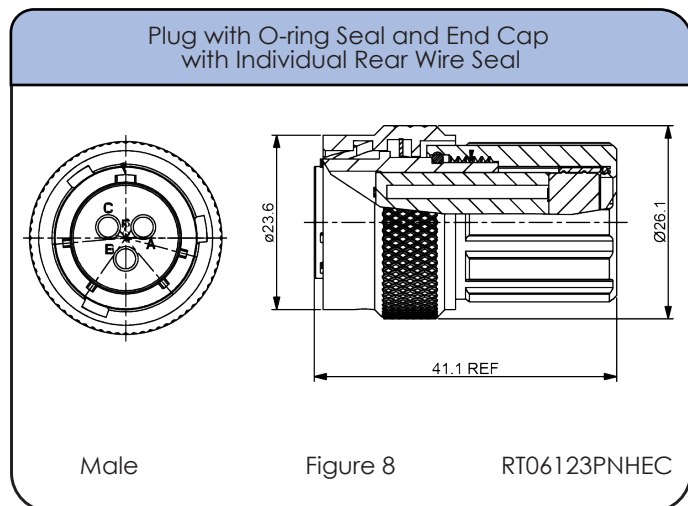
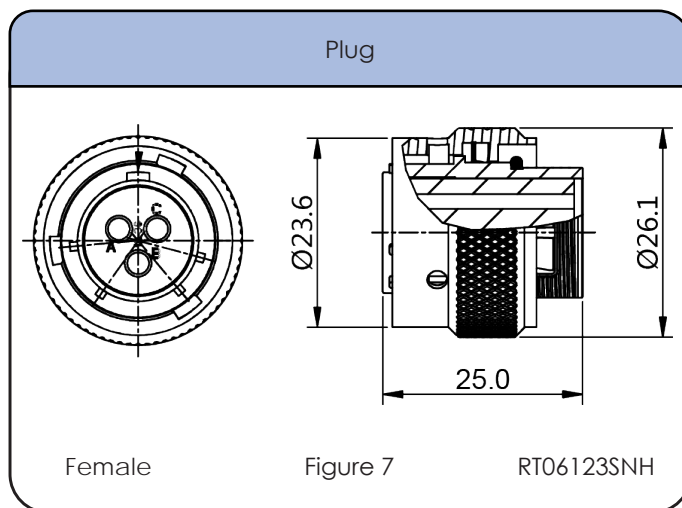
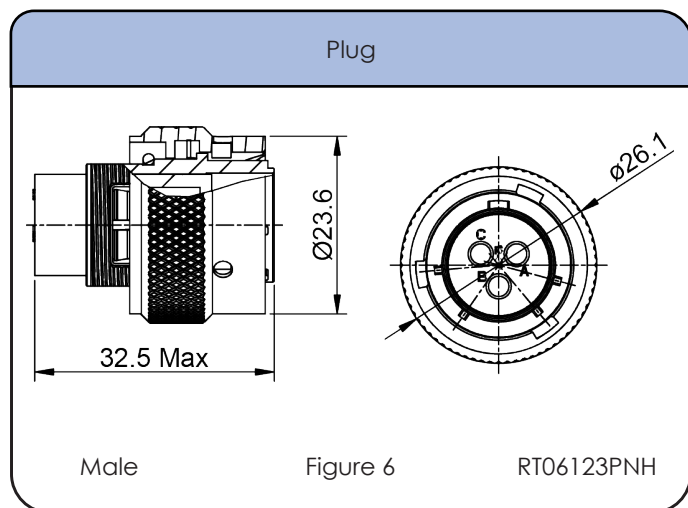


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |




Shell Size: 12    Number of Contacts: 3    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

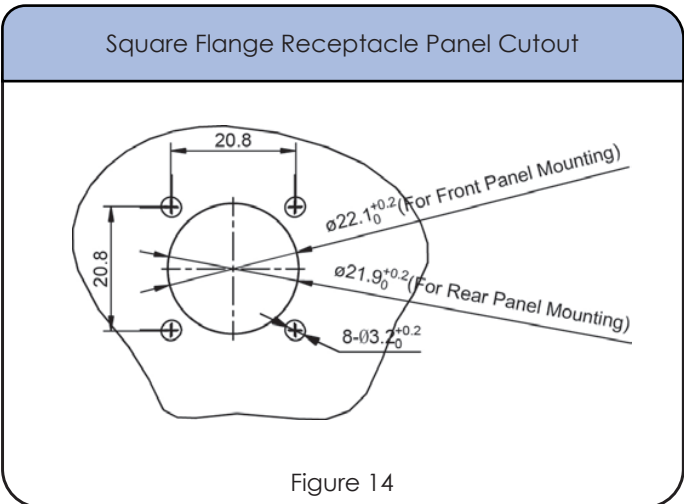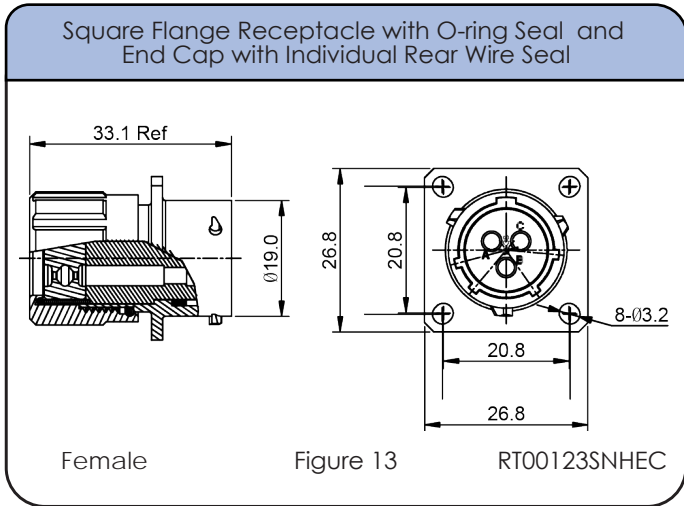
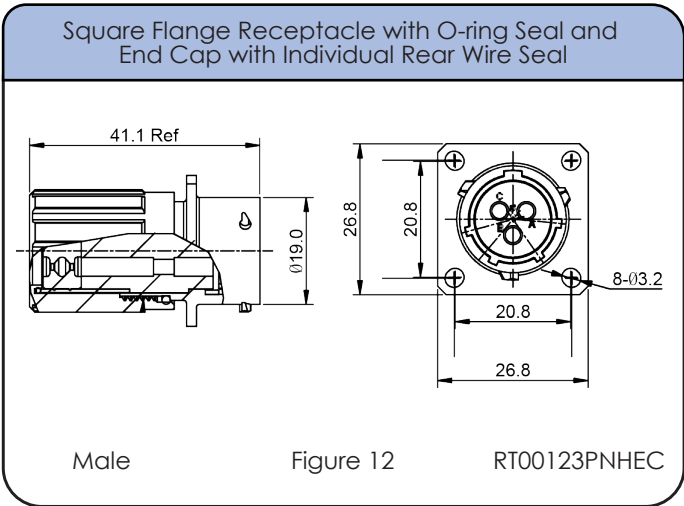
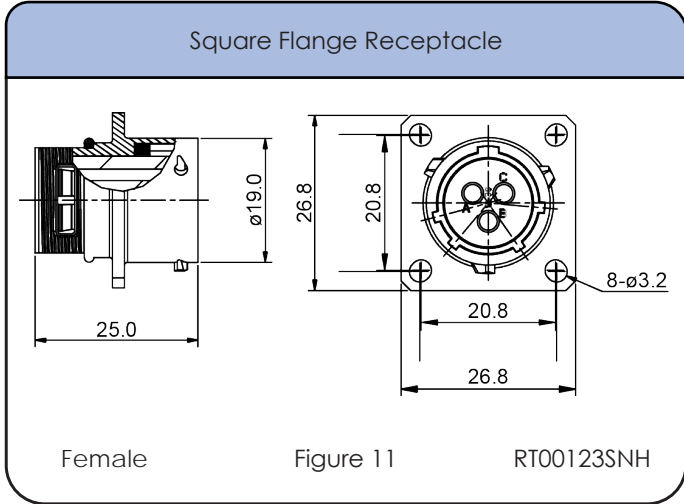
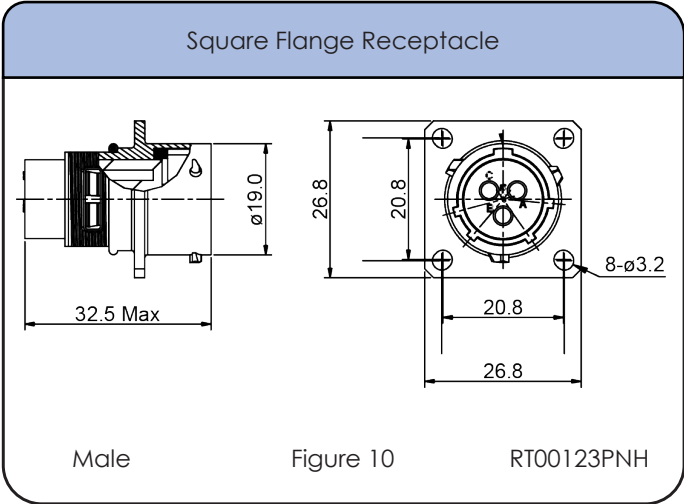


Shell Size: 12    Number of Contacts: 3    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

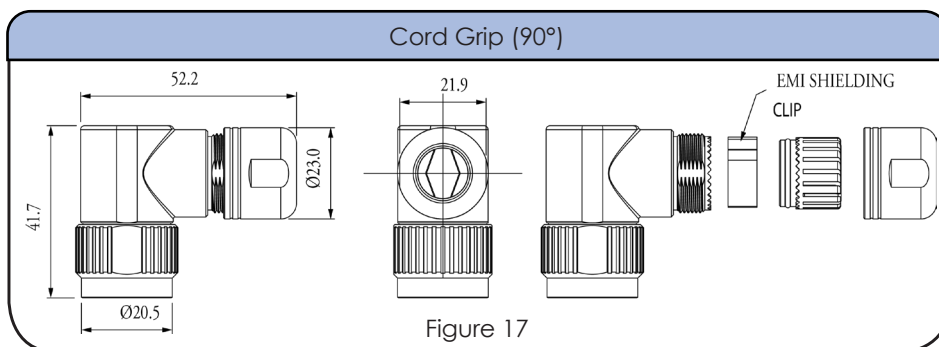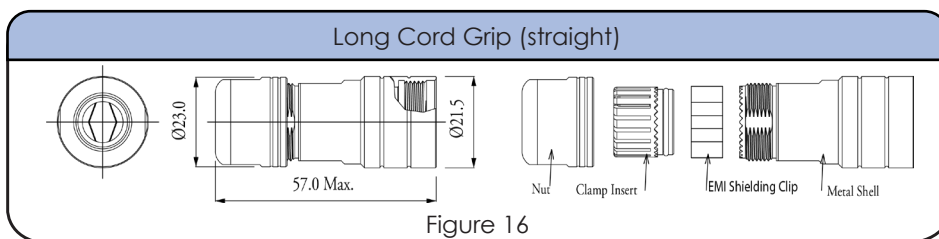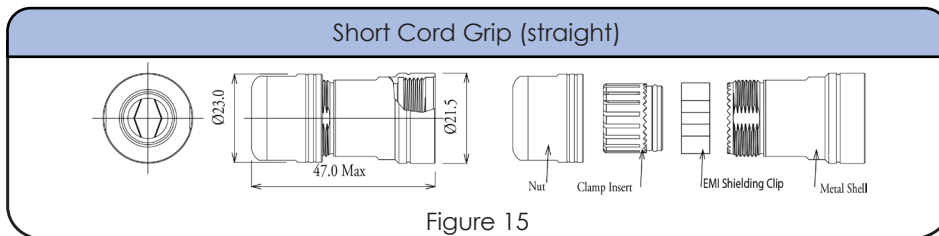

### Accessories





Shell Size: 12  
Sealing: IP67

Number of Contacts: 3  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools



Shell Size: 12    Number of Contacts: 3    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

## Contacts (con't)



## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Tool, Stamped & Formed  
Contact, Size 16, 20-14AWG



MFX-3954

Crimp Die for Stamped &  
Formed Contact



MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 34

Shell Size: 10    Number of Contacts: 4    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

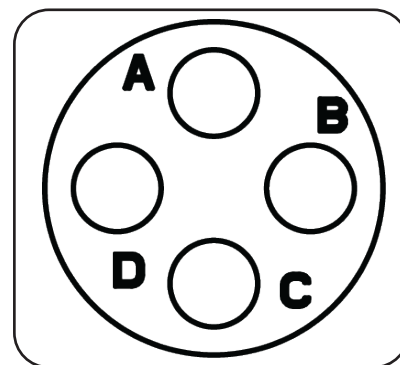

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07104PNH   | RT07104SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07104PNHEC | RT07104SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT07104PNH-K | RT07104SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT06104PNH   | RT06104SNH   | Plug   | 6               | 7      |
| RT06104PNHEC | RT06104SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT06104PNH-K | RT06104SNH-K | Plug Kit   | 6               | 7      |
| RT00104PNH   | RT00104SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00104PNHEC | RT00104SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT00104PNH-K | RT00104SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 34

\*\*See page 31 for the real seal wire range

### Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-10CG-S1 | Short Cord Grip (straight) | 3-6.5            | 15              | ✓         |
| RT0S-10CG-S2 | Short Cord Grip (straight) | 5-8.5            | 15              | ✓         |
| RT0L-10CG-S1 | Long Cord Grip (straight)  | 3-6.5            | 16              | ✓         |
| RT0L-10CG-S2 | Long Cord Grip (straight)  | 5-8.5            | 16              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 10      Number of Contacts: 4  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 16





### Dimensions Jam Nut Receptacle

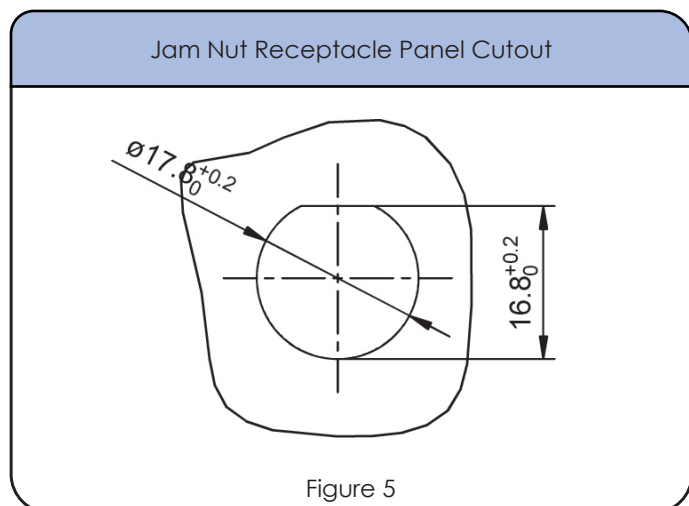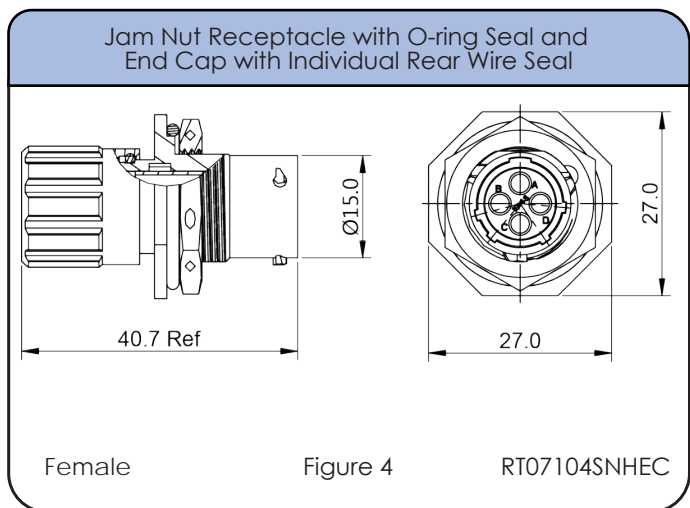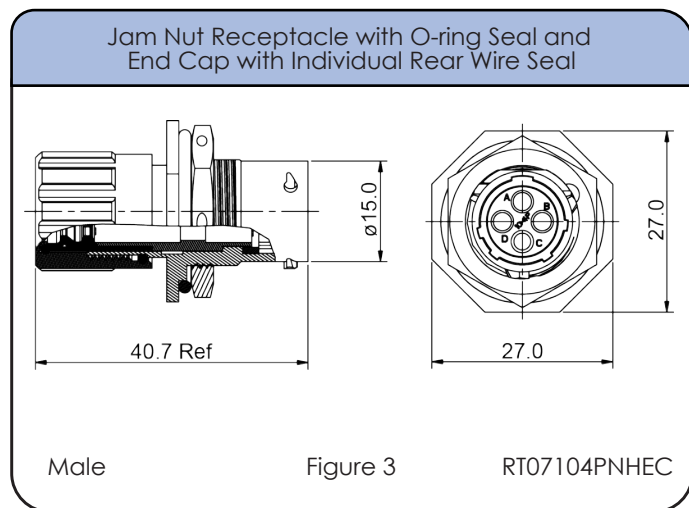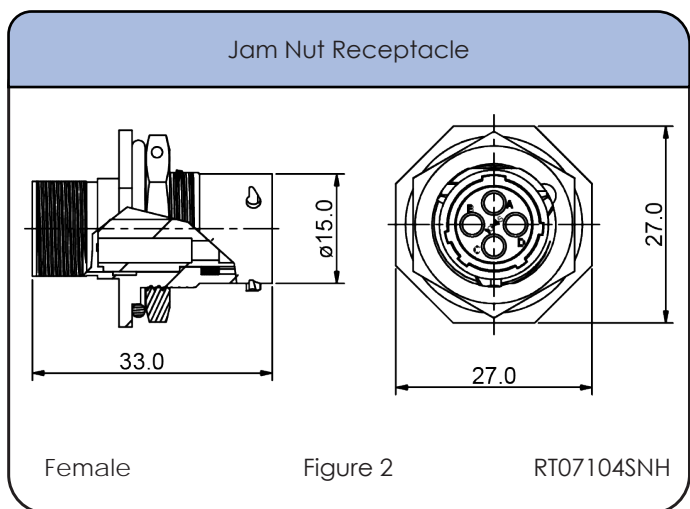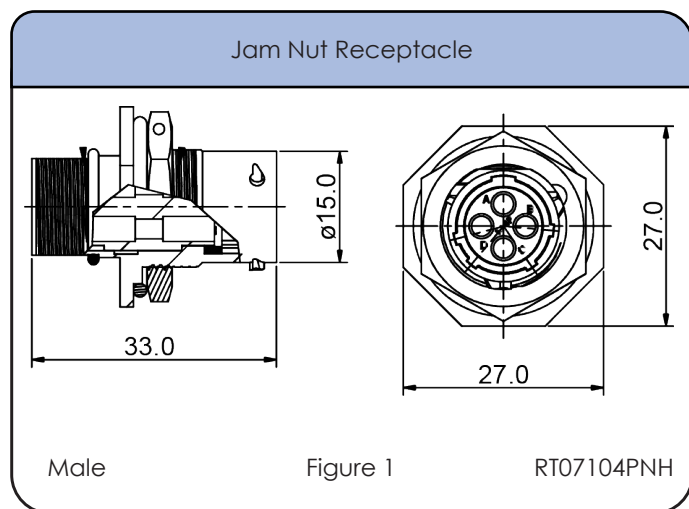



Shell Size: 10    Number of Contacts: 4    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

### Dimensions Plug


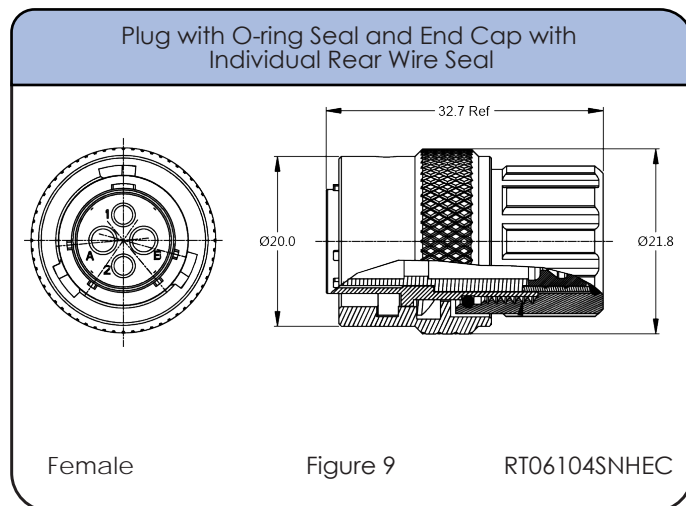
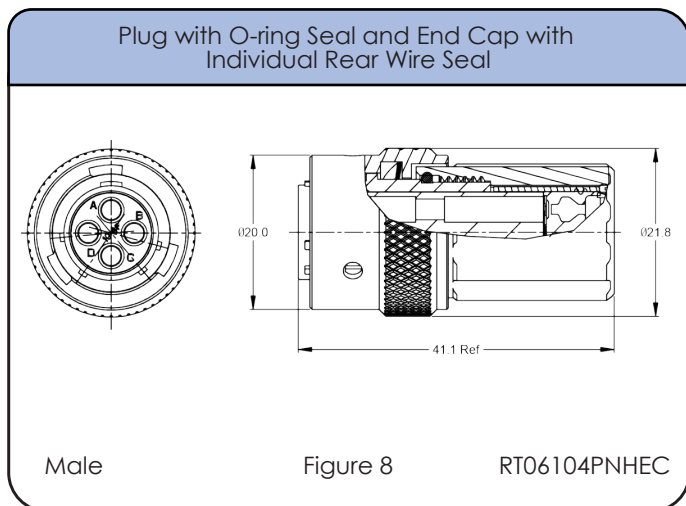
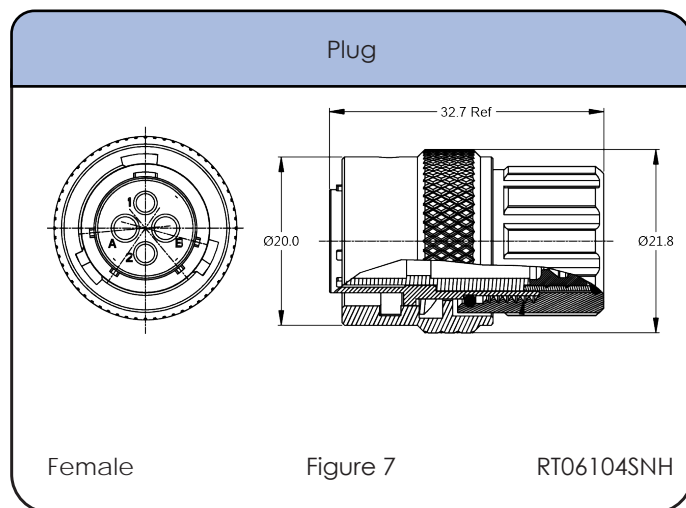
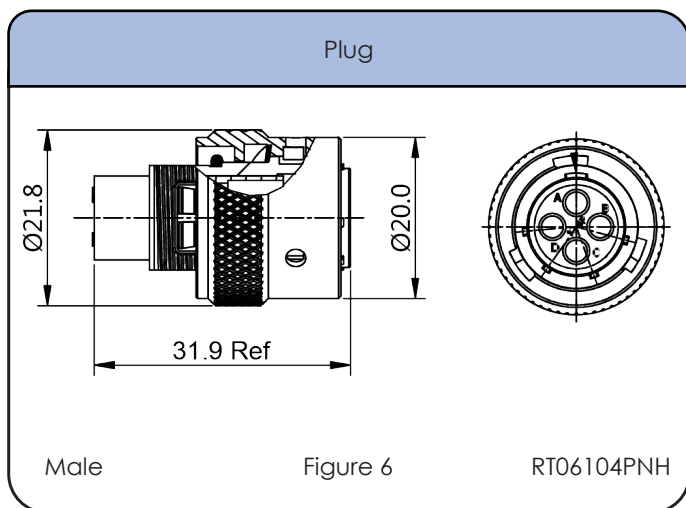


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |



Shell Size: 10    Number of Contacts: 4    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

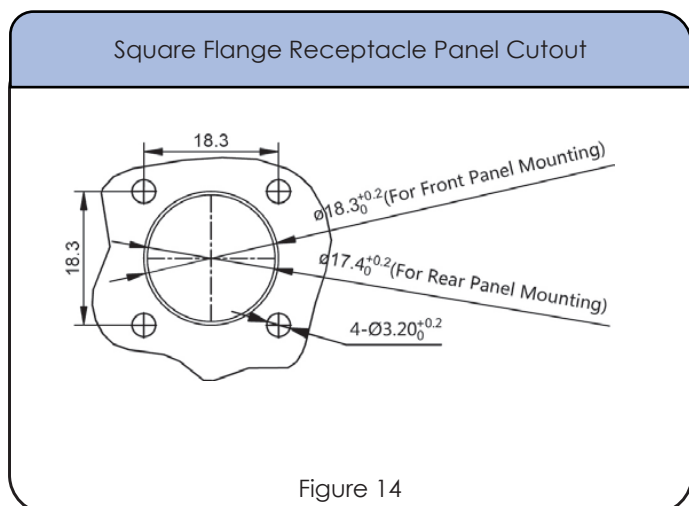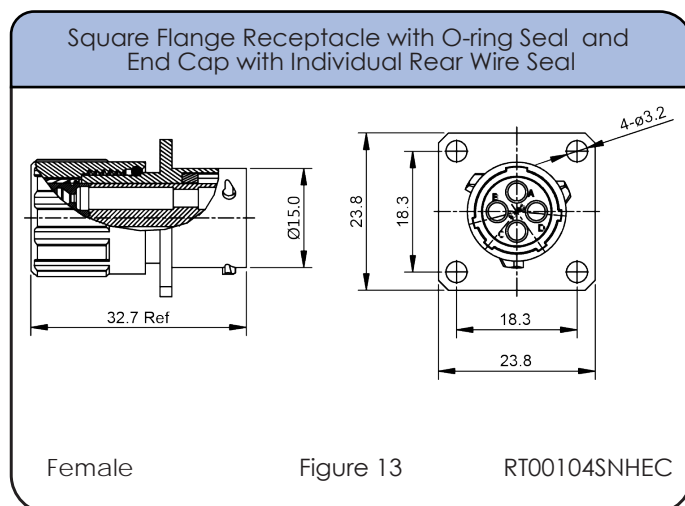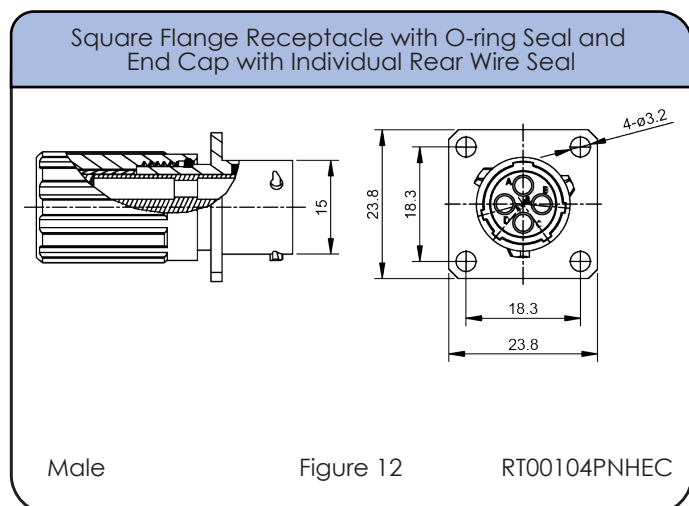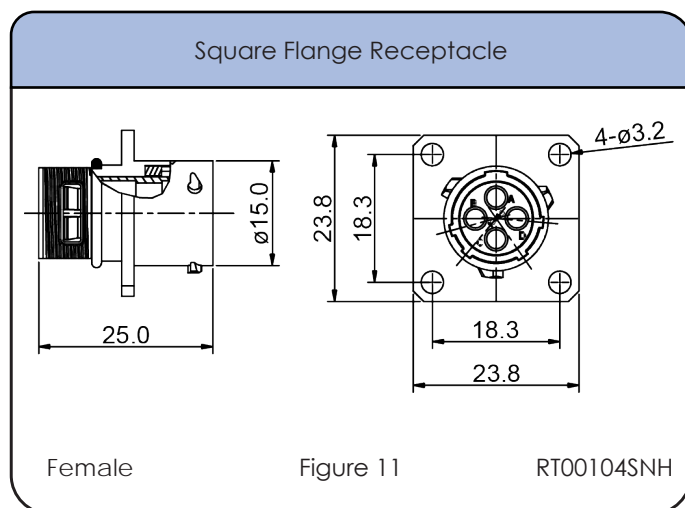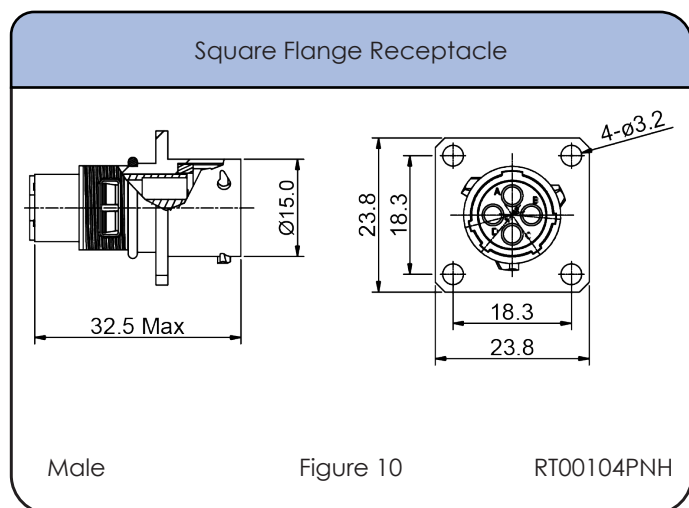

Shell Size: 10    Number of Contacts: 4    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h



## Dimensions Backshell

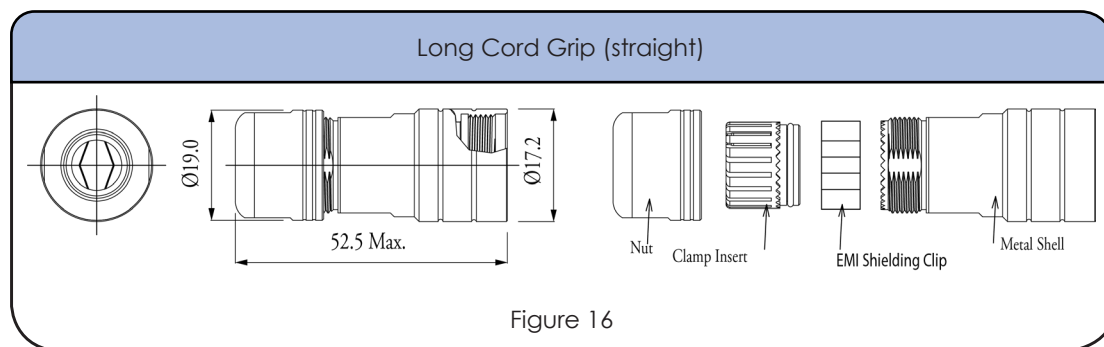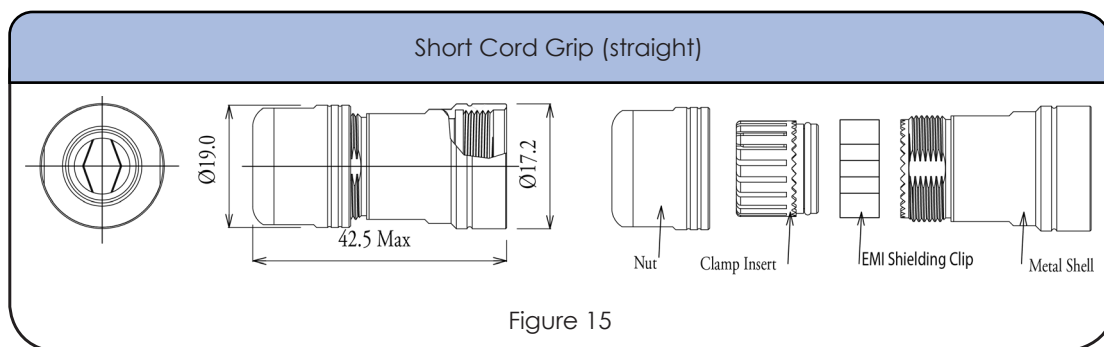

## Accessories



NEW!  
See  
Page  
16



Shell Size: 10  
Sealing: IP67

Number of Contacts: 4  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools



Shell Size: 10    Number of Contacts: 4    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h


## Contacts (con't)



## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

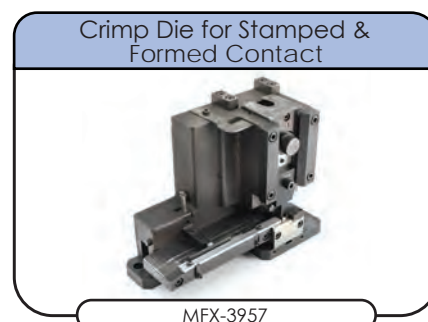



**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 42

Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

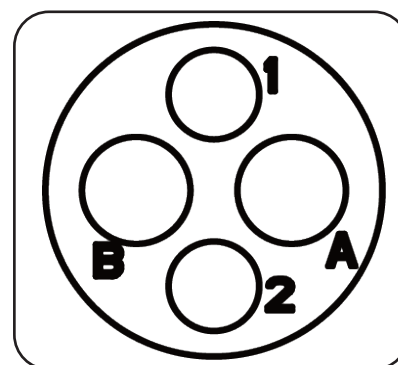

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07102PNH   | RT07102SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07102PNHEC | RT07102SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06102PNH   | RT06102SNH   | Plug   | 6               | 7      |
| RT06102PNHEC | RT06102SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00102PNH   | RT00102SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00102PNHEC | RT00102SNHEC | Square Flange Receptacle with O-ring Seal  | 12,14           | 13,14  |
| RT00102PNHEC | RT00102SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT00102PNH-K | RT00102SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 42

\*\*See page 39 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-10CG-S1 | Short Cord Grip (straight) | 3-6.5            | 15              | ✓         |
| RTOS-10CG-S2 | Short Cord Grip (straight) | 5-8.5            | 15              | ✓         |
| RTOL-10CG-S1 | Long Cord Grip (straight)  | 3-6.5            | 16              | ✓         |
| RTOL-10CG-S2 | Long Cord Grip (straight)  | 5-8.5            | 16              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 10      Number of Contacts: 4  
 Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 16 & 20





### Dimensions Jam Nut Receptacle

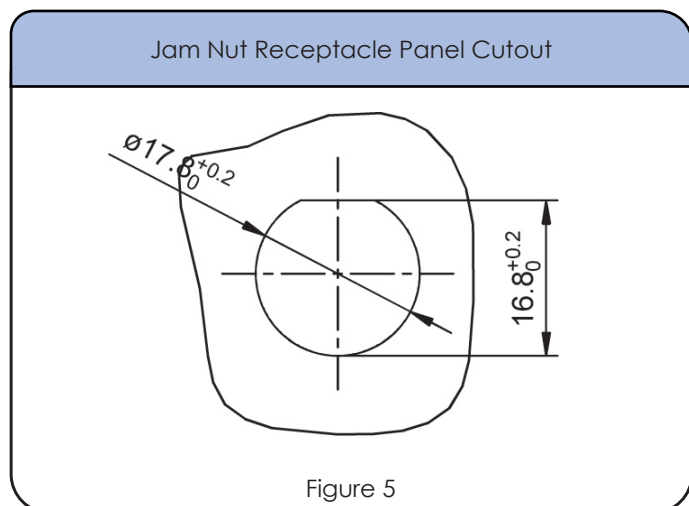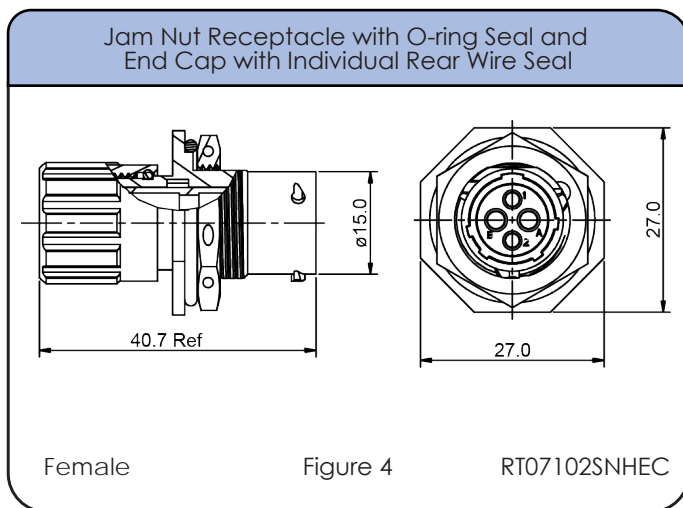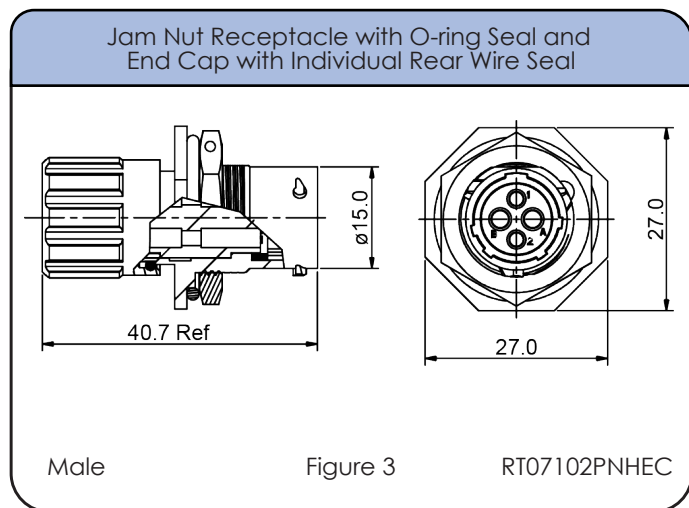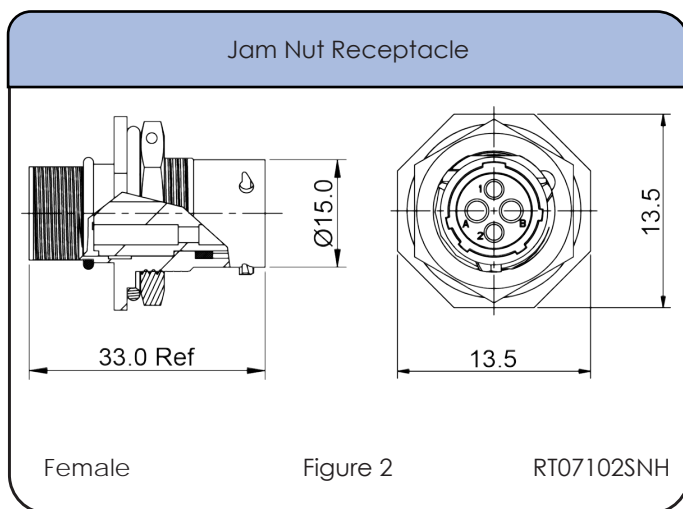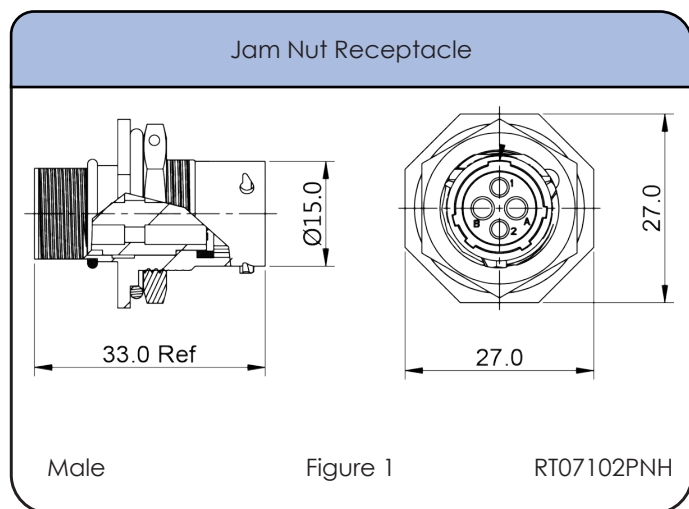

Shell Size: 10      Number of Contacts: 4  
Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 16 & 20

### Dimensions Plug


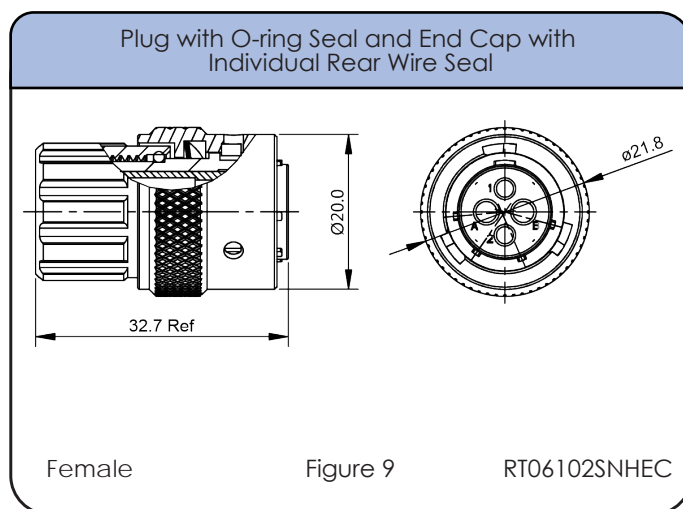
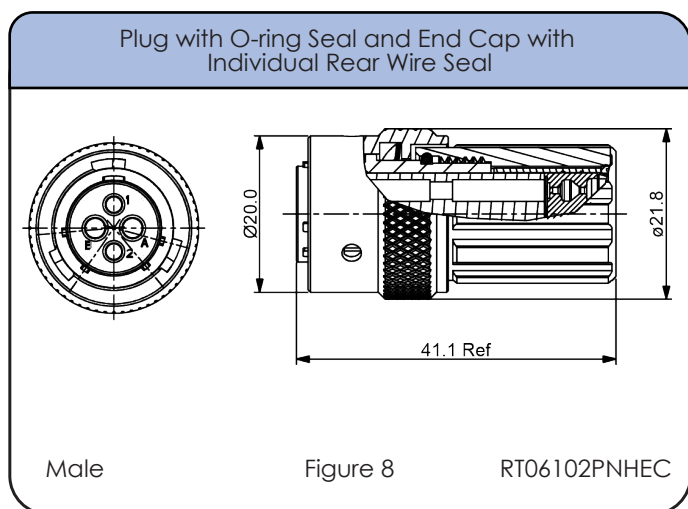
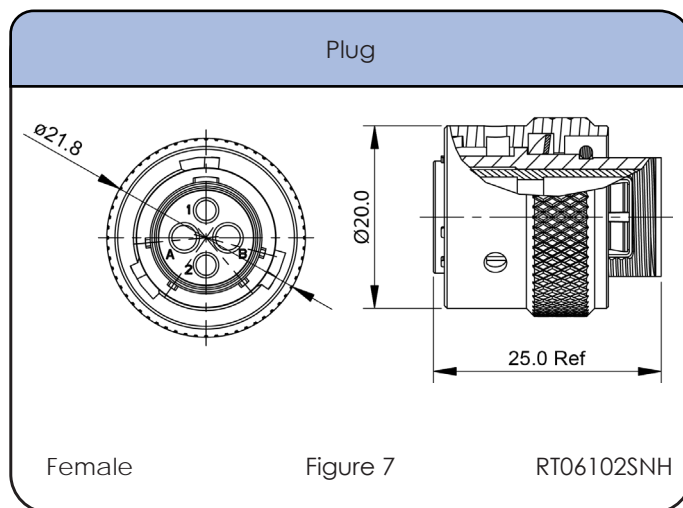
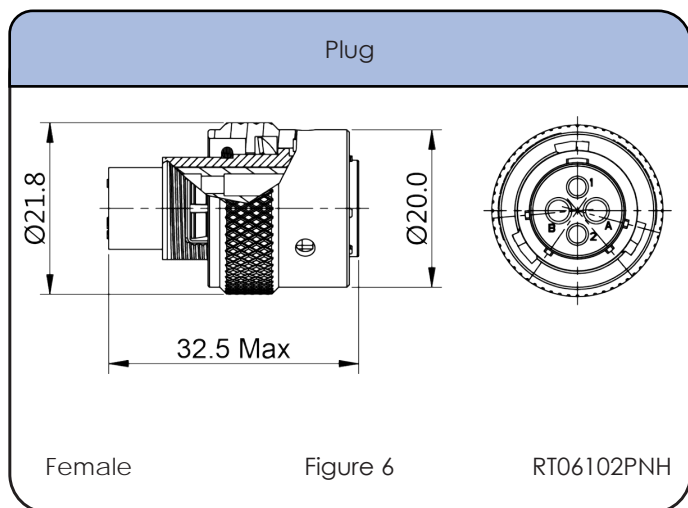


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |
| 20           | Ø1.6mm - Ø2.6mm                       | 20-30 AWG   |

Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
 Sealing: IP67    Salt Spray: 48h



## Dimensions Square Flange Receptacle

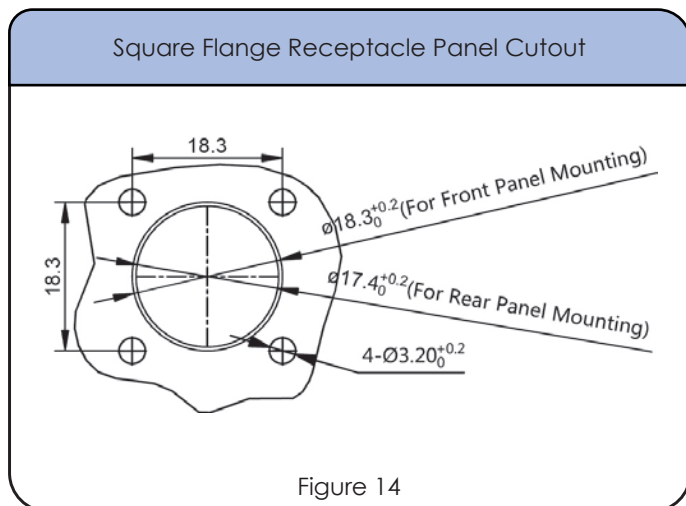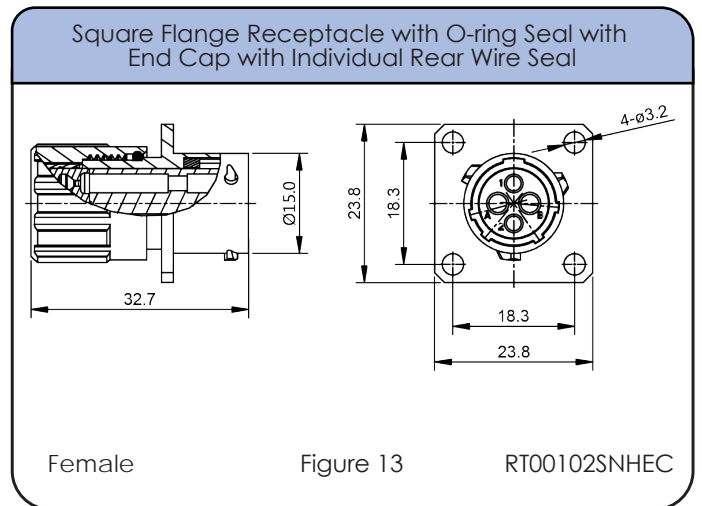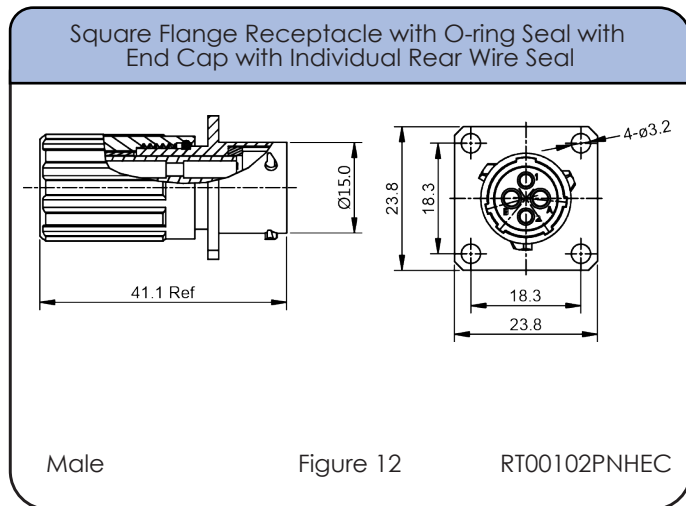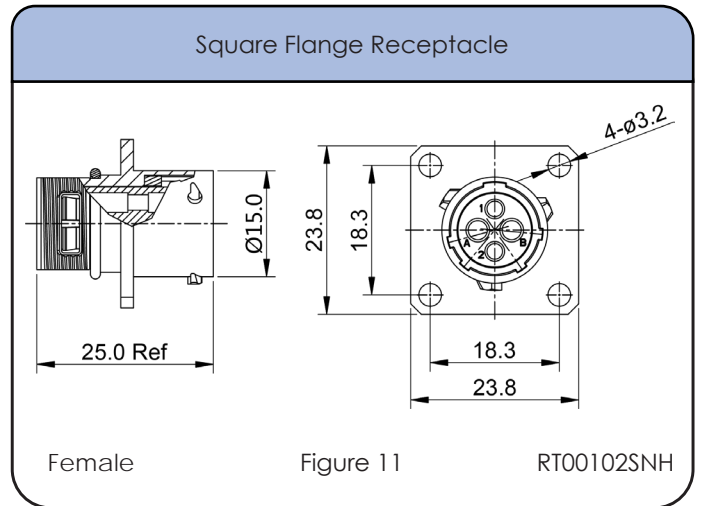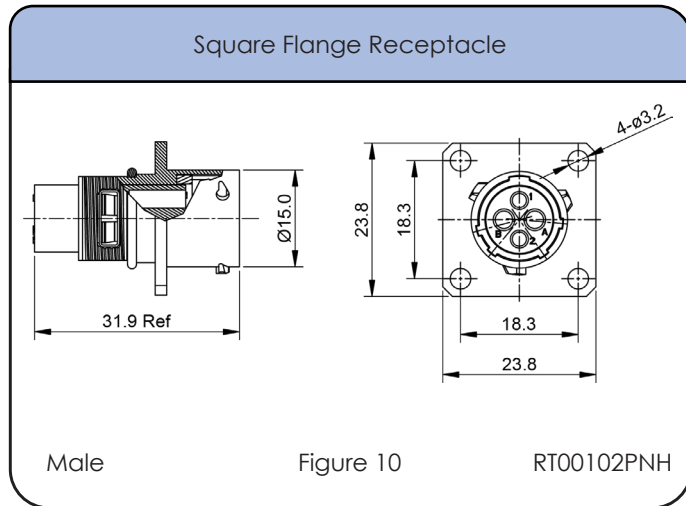



Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
Sealing: IP67    Salt Spray: 48h

## Dimensions Backshell

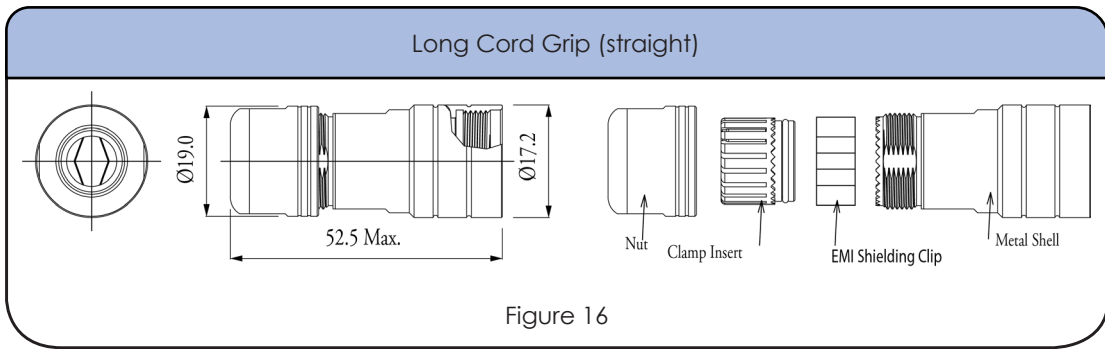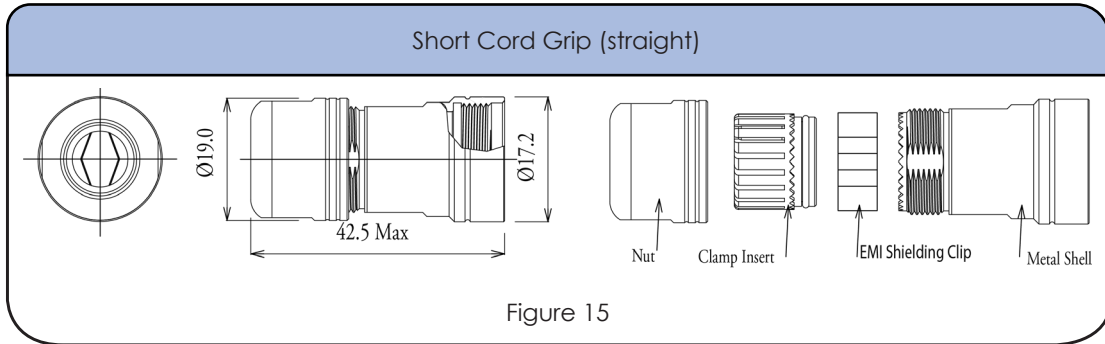

## Accessories

|  |   |  |  |
|--|---|--|--|
| <p>Plug Dustcap with Chain</p> <p>RT610DCG</p>                           | <p>Plug Dustcap without Chain</p> <p>RT610DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT010DCG</p>                           | <p>Receptacle Dustcap without Chain</p> <p>RT010DC</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT010RL</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011910</p> | <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD10B</p> | <p>Locking Clip with Lanyard</p> <p>108039110</p>      |
| <p>Sealing Plug</p> <p>AT13-204-2005</p>                                 | <p>Sealing Plug</p> <p>A114017-SR</p>   |  |  |

NEW!  
See  
Page  
16

Shell Size: 10      Number of Contacts: 4      Contact Size: Mixed 16 & 20  
 Sealing: IP67      Salt Spray: 48h

## Contacts



### Crimp Contacts, Machined

| Part Number |            | Contact Size | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|--------------|-------|-------------------------------|------------|
| Male        | Female     |              |       |                               |            |
| MP14M23F    | MS14M23F   | 16           | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 16           | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 16           | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 16           | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 16           | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 16           | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 16           | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 16           | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 16           | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 16           | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 16           | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 16           | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 16           | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 16           | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 16           | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 16           | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 16           | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 16           | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 16           | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 16           | 26-24 | .14-.25                       | Gold 30μ"  |

Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
Sealing: IP67    Salt Spray: 48h

## Crimp Contacts Machined (con't)



| Part Number |            | Contact Size | AWG     | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|--------------|---------|-------------------------------|------------|
| Male        | Female     |              |         |                               |            |
| MP20W23F    | MS20W23F   | 20           | 22-20   | .34-.50                       | Gold Flash |
| MP20W23G5   | MS20W23G5  | 20           | 22-20   | .34-.50                       | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 20           | 22-20   | .34-.50                       | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 20           | 22-20   | .34-.50                       | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 20           | 22-20   | .34-.50                       | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 20           | .13-.25 | 26-24                         | Gold Flash |
| MP24W23G5   | MS24W23G5  | 20           | .13-.25 | 26-24                         | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 20           | .13-.25 | 26-24                         | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 20           | .13-.25 | 26-24                         | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 20           | .13-.25 | 26-24                         | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 20           | 30-28   | .05-.08                       | Gold Flash |
| MP28W23G5   | MS28W23G5  | 20           | 30-28   | .05-.08                       | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 20           | 30-28   | .05-.08                       | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 20           | 30-28   | .05-.08                       | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 20           | 30-28   | .05-.08                       | Gold 30μ"  |

## Tools



Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
 Sealing: IP67    Salt Spray: 48h

### Contacts (con't)



### Crimp Contacts, Stamped & Formed

| Part Number |           | Contact Size | AWG   | Max Wire (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|--------------|-------|-----------------------------|------------|
| Male        | Female    |              |       |                             |            |
| SP14M2F     | SS14M2F   | 16           | 14    | 2.0-2.5                     | Gold Flash |
| SP14M2G5    | SS14M2G5  | 16           | 14    | 2.0-2.5                     | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 16           | 14    | 2.0-2.5                     | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 16           | 14    | 2.0-2.5                     | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 16           | 14    | 2.0-2.5                     | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 16           | 18-16 | .75-1.5                     | Gold Flash |
| SP16M2G5    | SS16M2G5  | 16           | 18-16 | .75-1.5                     | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 16           | 18-16 | .75-1.5                     | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 16           | 18-16 | .75-1.5                     | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 16           | 18-16 | .75-1.5                     | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 16           | 22-20 | .34-.50                     | Gold Flash |
| SP20M2G5    | SS20M2G5  | 16           | 22-20 | .34-.50                     | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 16           | 22-20 | .34-.50                     | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 16           | 22-20 | .34-.50                     | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 16           | 22-20 | .34-.50                     | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 16           | 22-20 | .14-.25                     | Gold Flash |
| SP24M2G5    | SS24M2G5  | 16           | 26-24 | .14-.25                     | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 16           | 26-24 | .14-.25                     | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 16           | 26-24 | .14-.25                     | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 16           | 26-24 | .14-.25                     | Gold 30μ"  |

Shell Size: 10    Number of Contacts: 4    Contact Size: Mixed 16 & 20  
Sealing: IP67    Salt Spray: 48h

## Crimp Contacts, Stamped & Formed (con't)

| Part Number |           | Contact Size | AWG   | Max Wire (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|--------------|-------|-----------------------------|------------|
| Male        | Female    |              |       |                             |            |
| SP20W2F     | SS20W2F   | 20           | 22-20 | .34-.50                     | Gold Flash |
| SP20W2G10   | SS20W2G10 | 20           | 22-20 | .34-.50                     | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 20           | 22-20 | .34-.50                     | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 20           | 22-20 | .34-.50                     | Gold 30μ"  |
| SP20W2G5    | SS20W2G5  | 20           | 22-20 | .34-.50                     | Gold 5μ"   |
| SP24W2F     | SS24W2F   | 20           | 26-24 | .14-.25                     | Gold Flash |
| SP24W2G5    | SS24W2G5  | 20           | 26-24 | .14-.25                     | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 20           | 26-24 | .14-.25                     | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 20           | 26-24 | .14-.25                     | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 20           | 26-24 | .14-.25                     | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 20           | 30-28 | .05-.08                     | Gold Flash |
| SP28W2G5    | SS28W2G5  | 20           | 30-28 | .05-.08                     | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 20           | 30-28 | .05-.08                     | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 20           | 30-28 | .05-.08                     | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 20           | 30-28 | .05-.08                     | Gold 30μ"  |

## Tools





**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 52

Shell Size: 14    Number of Contacts: 4    Contact Size: Mixed 2.5mm & 16  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

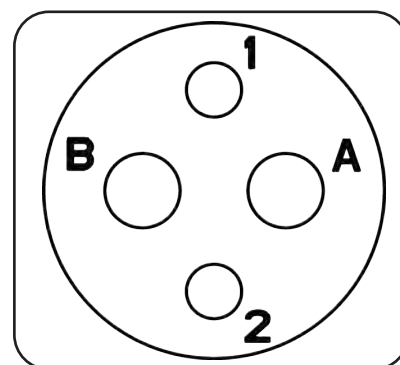

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07142PNH   | RT07142SNH   | Jam Nut Receptacle with O-ring Seal  | 1,5             | 2,5    |
| RT07142PNHEC | RT07142SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06142PNH   | RT06142SNH   | Plug with O-ring Seal  | 6               | 7      |
| RT06142PNHEC | RT06142SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00142PNH   | RT00142SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00142PNHEC | RT00142SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 52  
\*\*See page 49 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-14CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RTOS-14CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RTOL-14CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RTOL-14CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RTOB-14CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RTOB-14CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 14    Number of Contacts: 4  
 Sealing: IP67    Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16





### Dimensions Jam Nut Receptacle

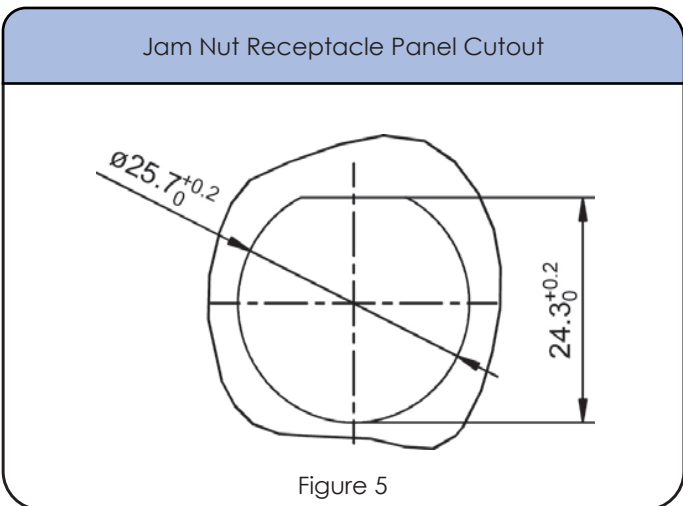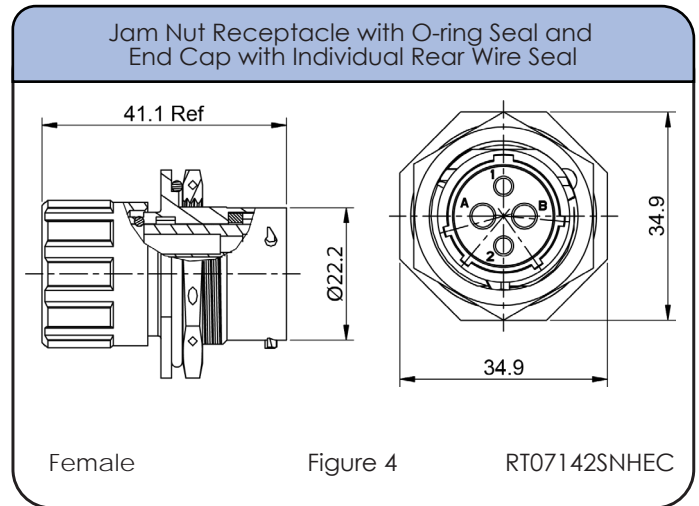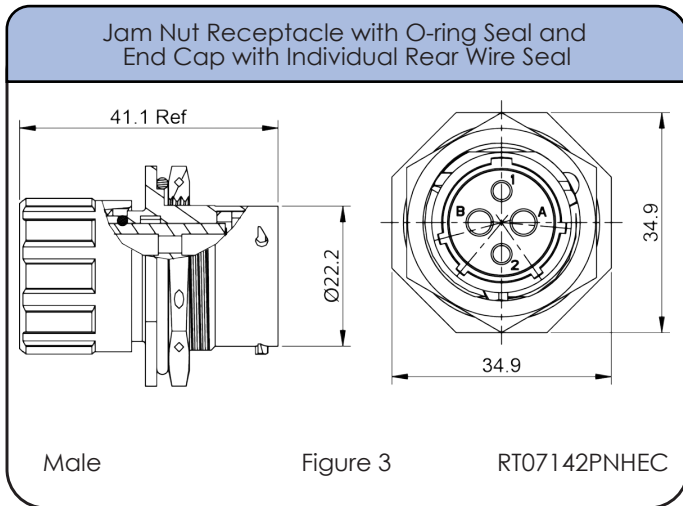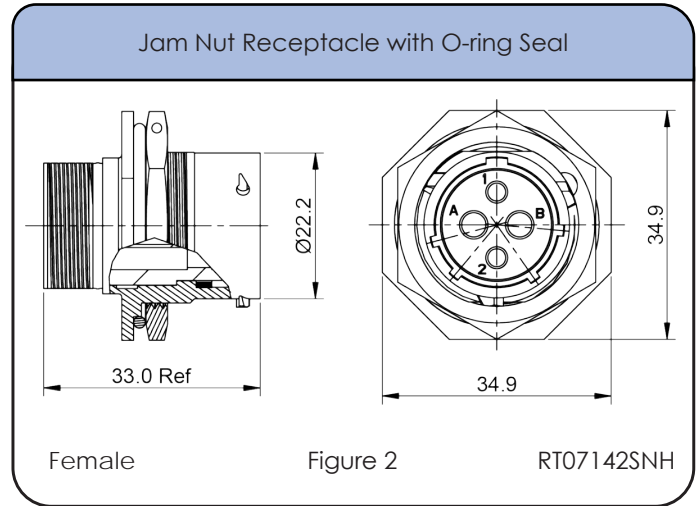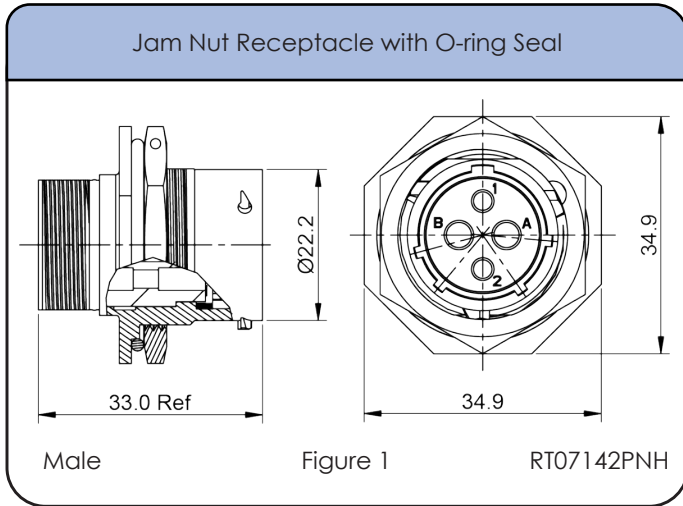

Shell Size: 14      Number of Contacts: 4  
Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Dimensions Plug


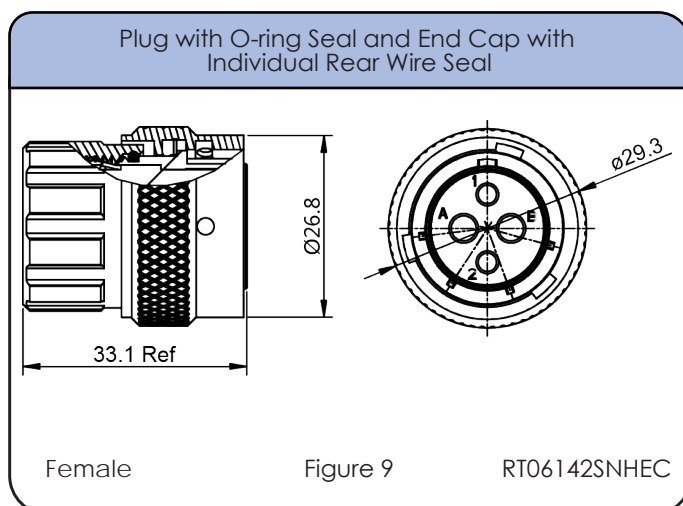
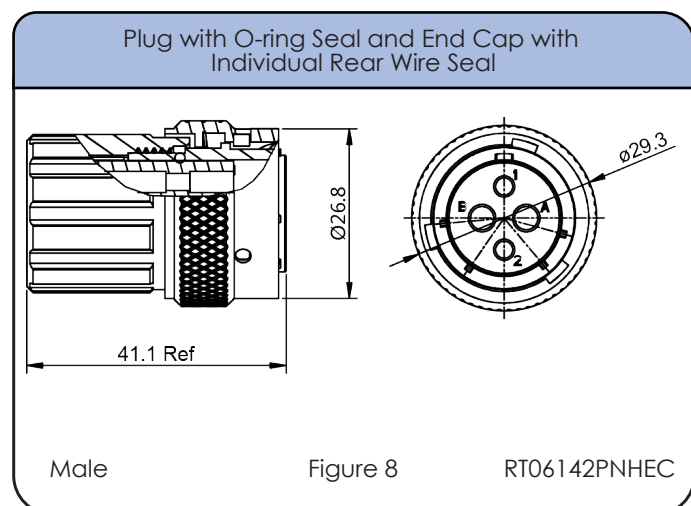
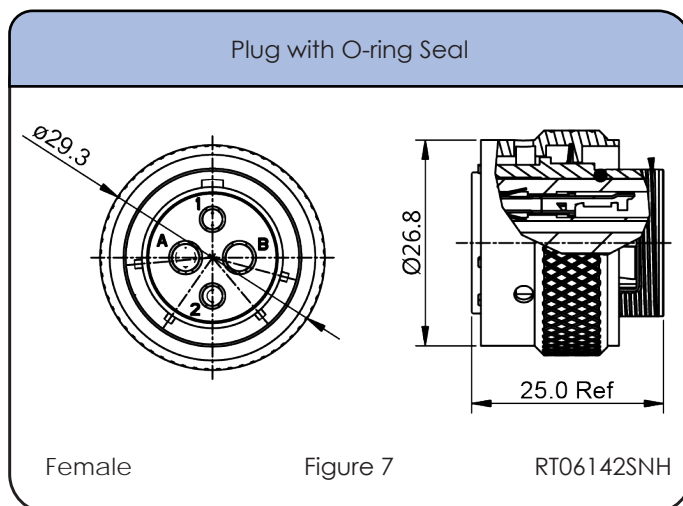
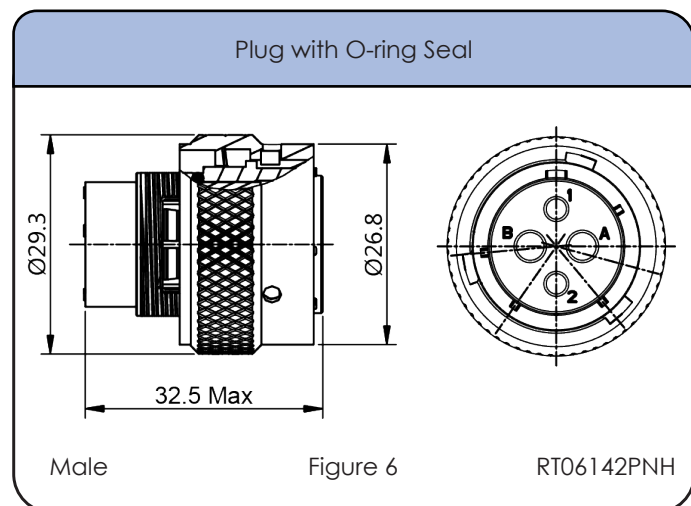


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 2.5mm        | Ø3.3mm - Ø4.3mm                       | 14 - 12 AWG |
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 14    Number of Contacts: 4    Contact Size: Mixed 2.5mm & 16  
 Sealing: IP67    Salt Spray: 48h




## Dimensions Square Flange Receptacle

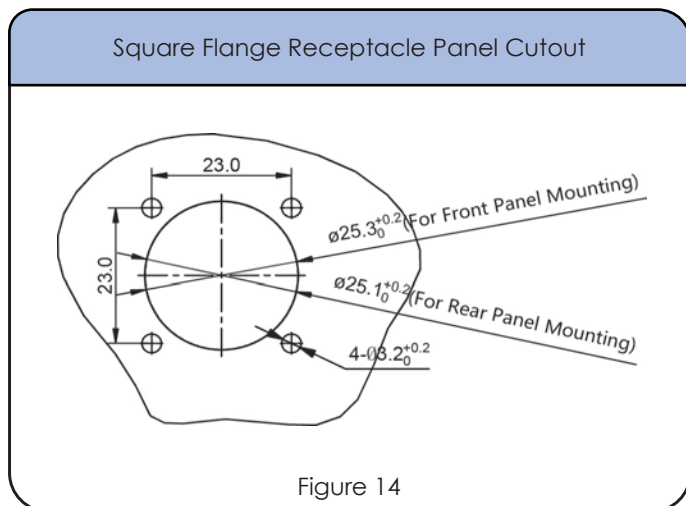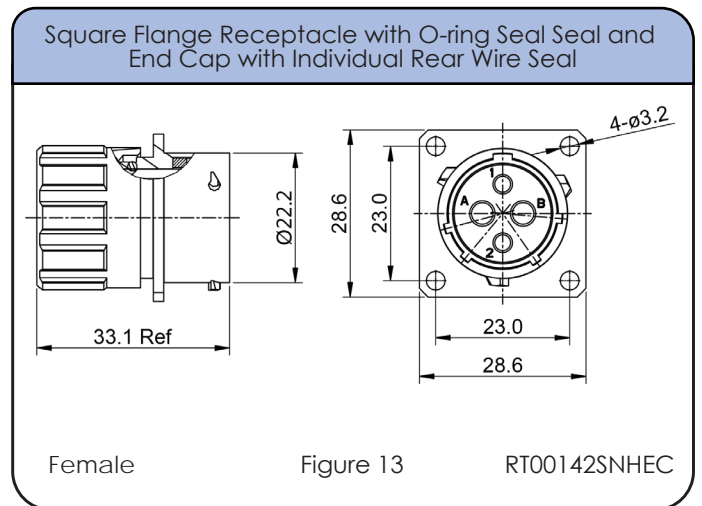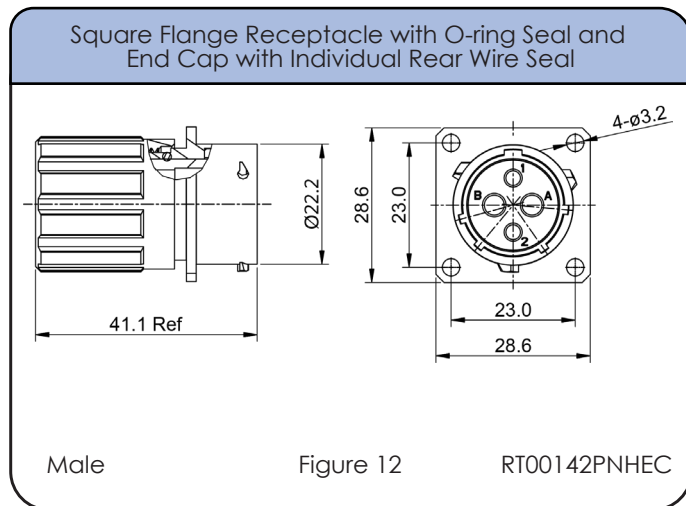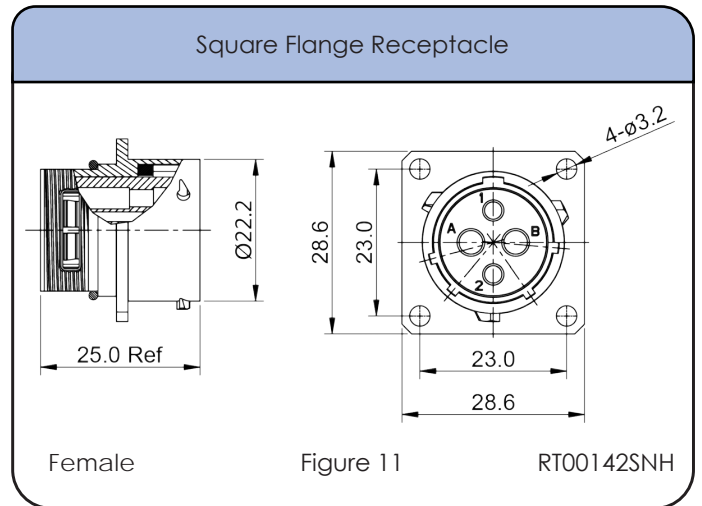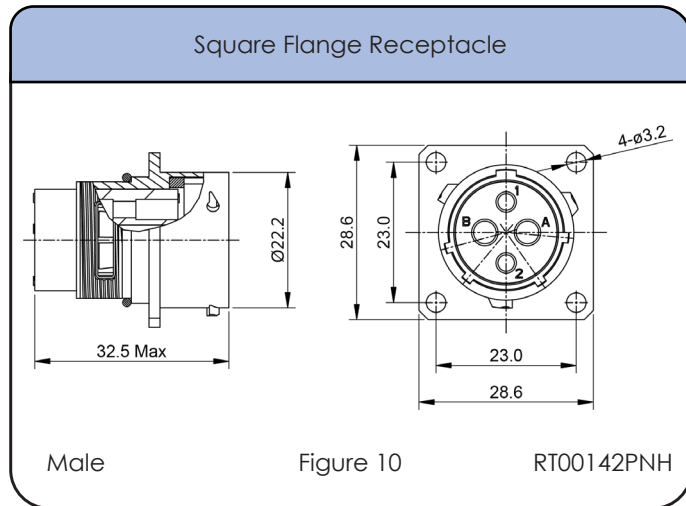



Shell Size: 14      Number of Contacts: 4      Contact Size: Mixed 2.5mm & 16  
Sealing: IP67      Salt Spray: 48h

## Dimensions Backshell

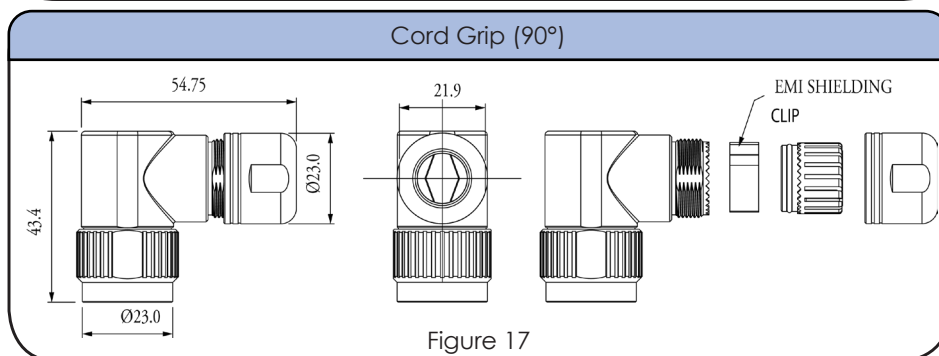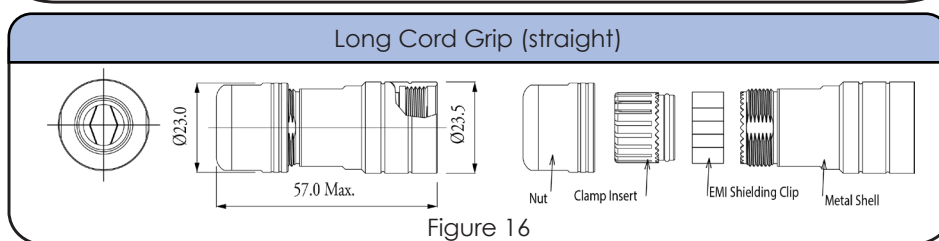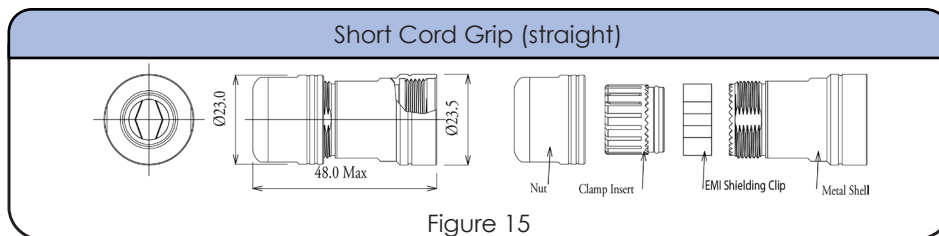

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039114</p>                        | <p>Plug Dustcap with Chain</p> <p>RT614DCG</p>                                 | <p>Plug Dustcap without Chain</p> <p>RT614DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT014DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT014RL</p> | <p>Receptacle Dustcap without Chain</p> <p>RT014DC</p>                         | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011914</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Sealing Plug</p> <p>A114017</p>                                       | <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD14B</p> |   |  |

Shell Size: 14  
Sealing: IP67

Number of Contacts: 4  
Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | Contact Size | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|--------------|-------|-------------------------------|------------|
| Male        | Female     |              |       |                               |            |
| MP14M23F    | MS14M23F   | 16           | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 16           | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 16           | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 16           | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 16           | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 16           | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 16           | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 16           | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 16           | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 16           | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 16           | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 16           | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 16           | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 16           | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 16           | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 16           | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 16           | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 16           | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 16           | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 16           | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools



Shell Size: 14      Number of Contacts: 4  
Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Contacts (con't)



## Crimp Contacts, Stamped & Formed

| Part Number |           | Contact Size | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|--------------|-------|-------------------------------|------------|
| Male        | Female    |              |       |                               |            |
| SP12A1T     | SS12A1T   | 2.5mm        | 14-12 | 2.5-3.5                       | Tin        |
| SP14M2F     | SS14M2F   | 16           | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 16           | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 16           | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 16           | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 16           | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 16           | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 16           | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 16           | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 16           | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 16           | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 16           | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 16           | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 16           | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 16           | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 16           | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 16           | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 16           | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 16           | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 16           | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 16           | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Extraction Tool 2.5mm Contact



QXRT12S

Contact Extraction Tool, #16 (Ø 1.6) Contact



QXRT16

Hand Tool, Stamped & Formed Contact, 2.5 mm



MFY-3962

Hand Tool, Stamped & Formed Contact, Size 16



MFY-3954

Crimp Die for Stamped & Formed Contact



MFY-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 60

Shell Size: 14    Number of Contacts: 4    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

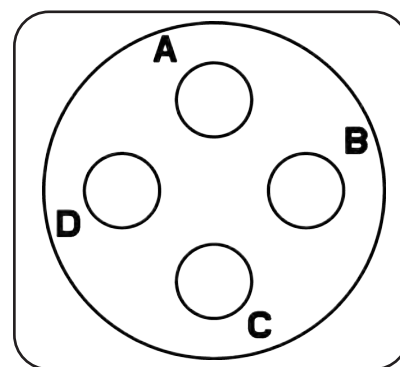

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07144PNH   | RT07144SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07144PNHEC | RT07144SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06144PNH   | RT06144SNH   | Plug   | 6               | 7      |
| RT06144PNHEC | RT06144SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00144PNH   | RT00144SNH   | Square Flange Receptacle   | 10              | 11,14  |
| RT00144PNHEC | RT00144SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 60  
\*\*See page 57 for the real seal wire range

## Backshells

| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-14CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RT0S-14CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RT0L-14CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RT0L-14CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RT0B-14CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RT0B-14CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |






\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.



Shell Size: 14      Number of Contacts: 4  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 2.5mm





### Dimensions Jam Nut Receptacle

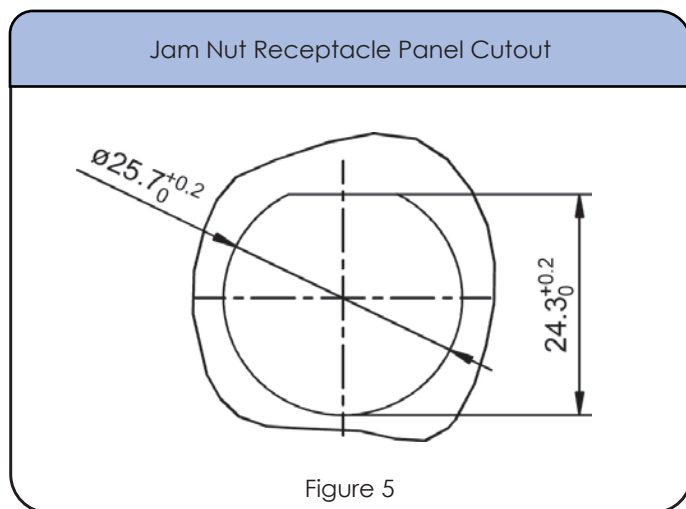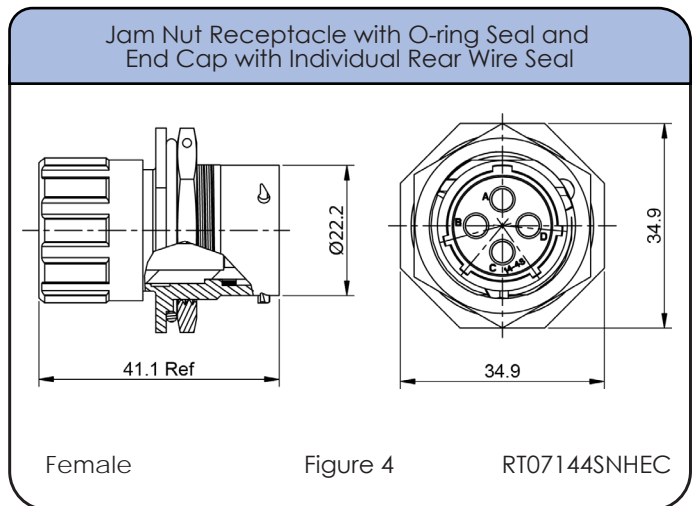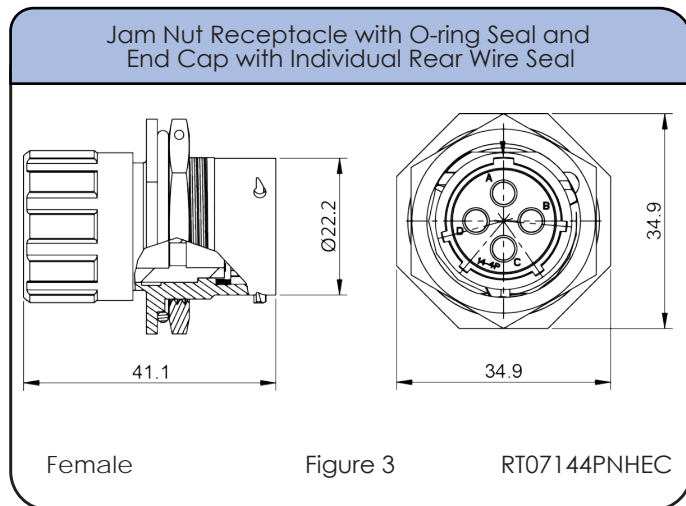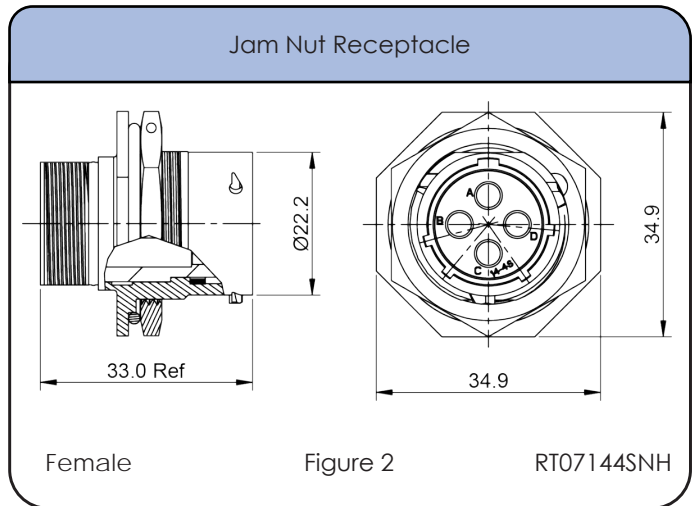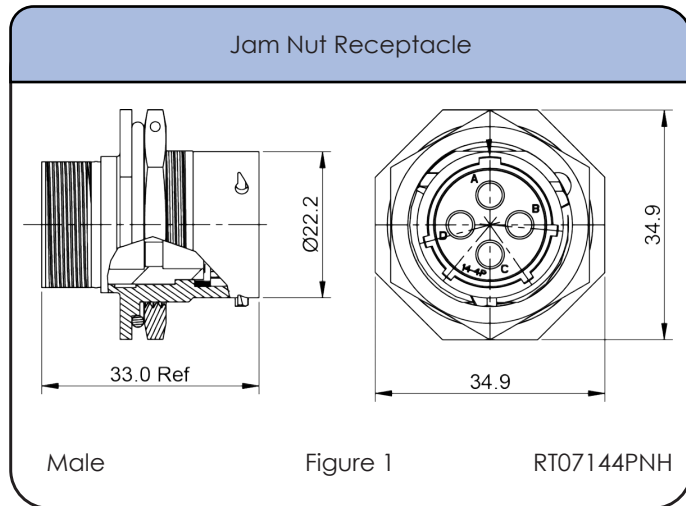

Shell Size: 14      Number of Contacts: 4  
Sealing: IP67      Salt Spray: 48h

Contact Size: 2.5mm

### Dimensions Plug


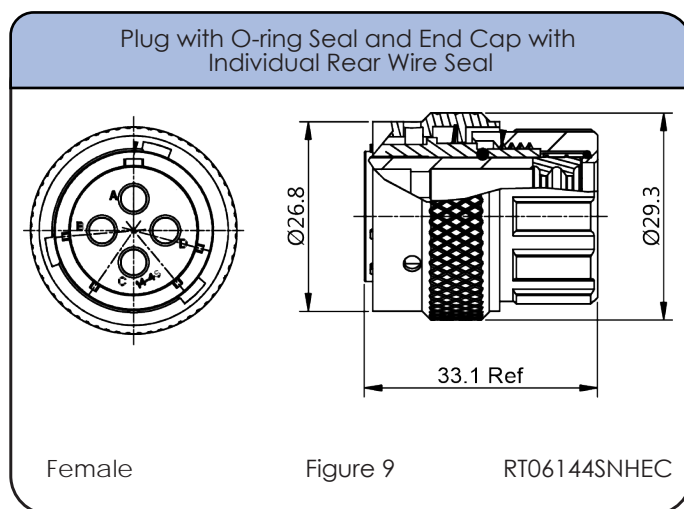
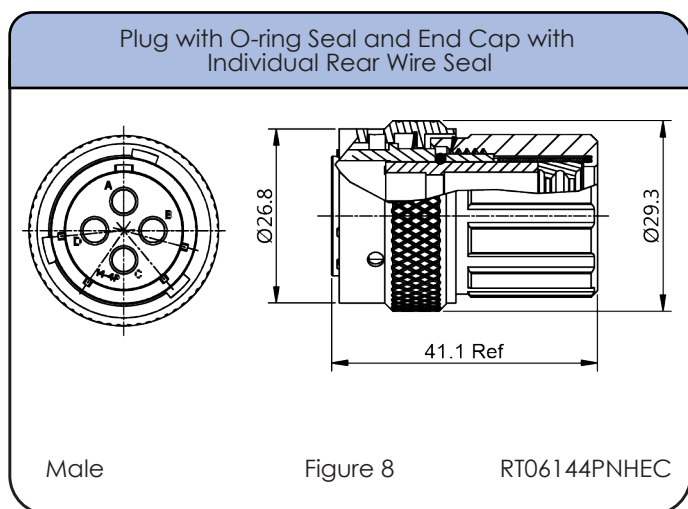
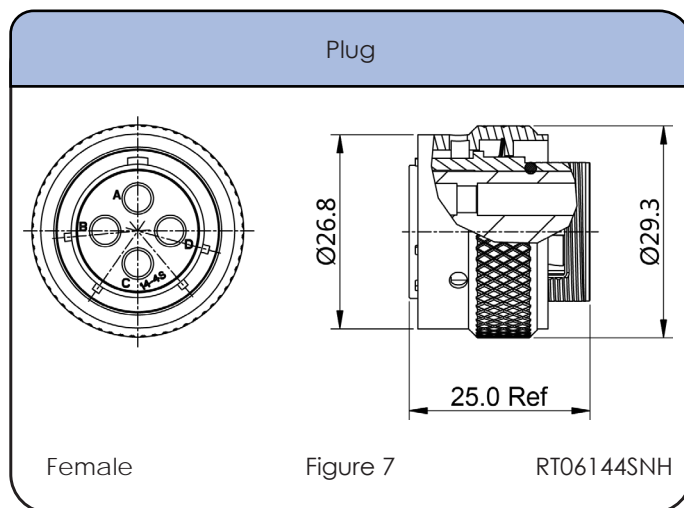
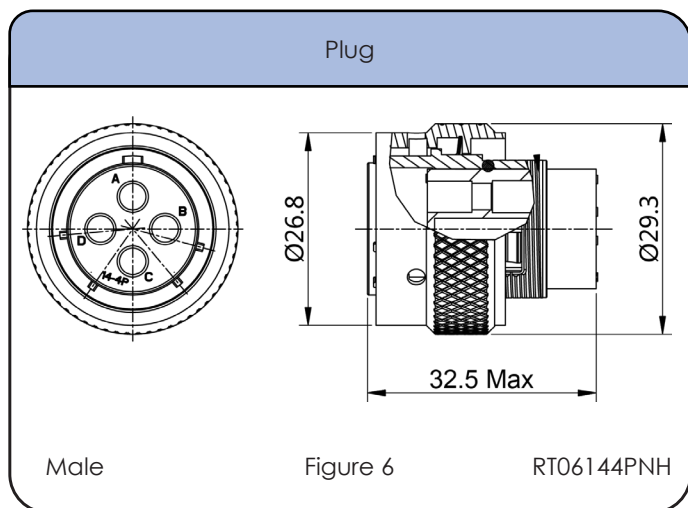


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 2.5mm        | Ø3.3mm - Ø4.3mm                       | 14 - 12 AWG |




Shell Size: 14    Number of Contacts: 4    Contact Size: 2.5mm  
 Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

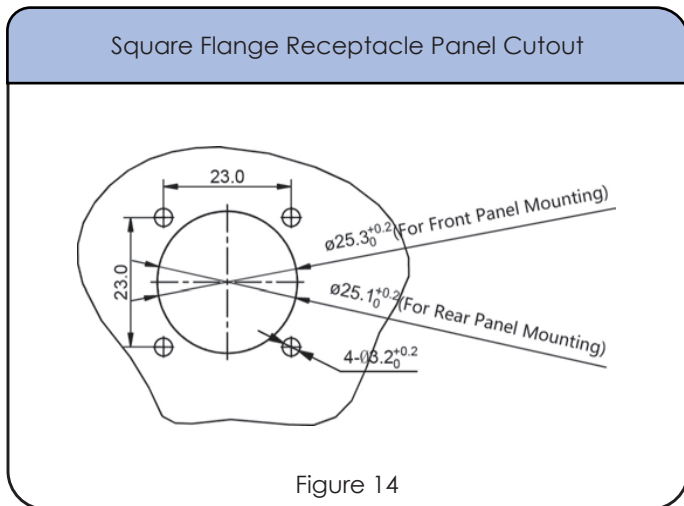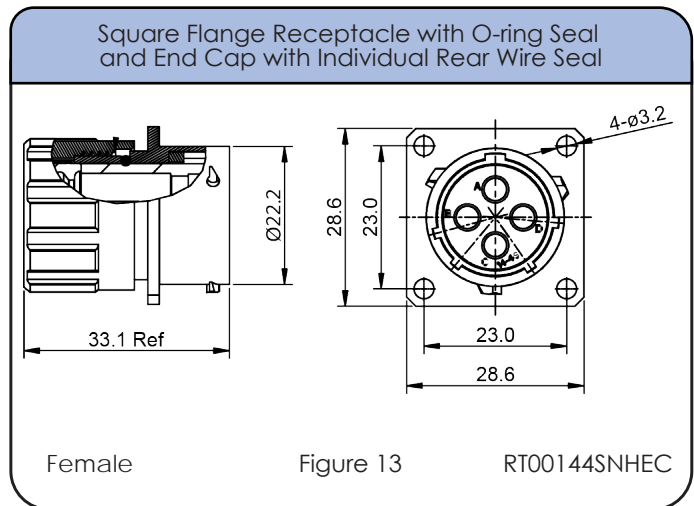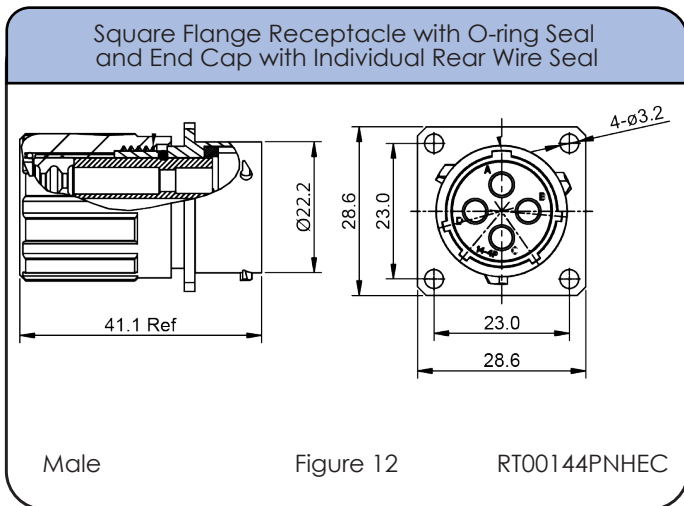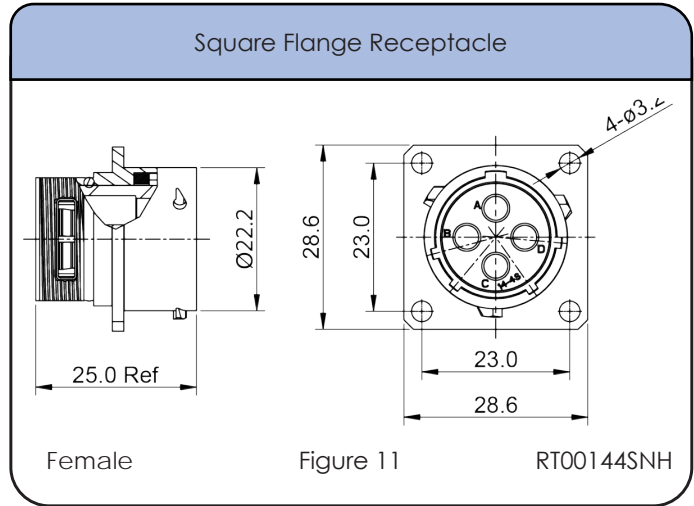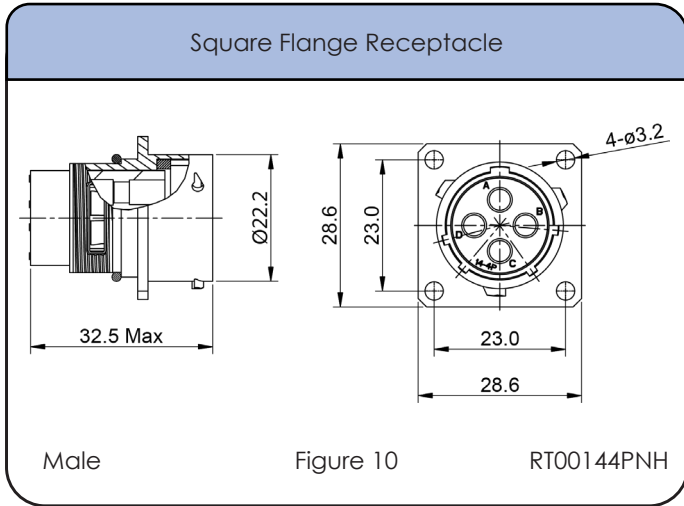

Shell Size: 14    Number of Contacts: 4    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

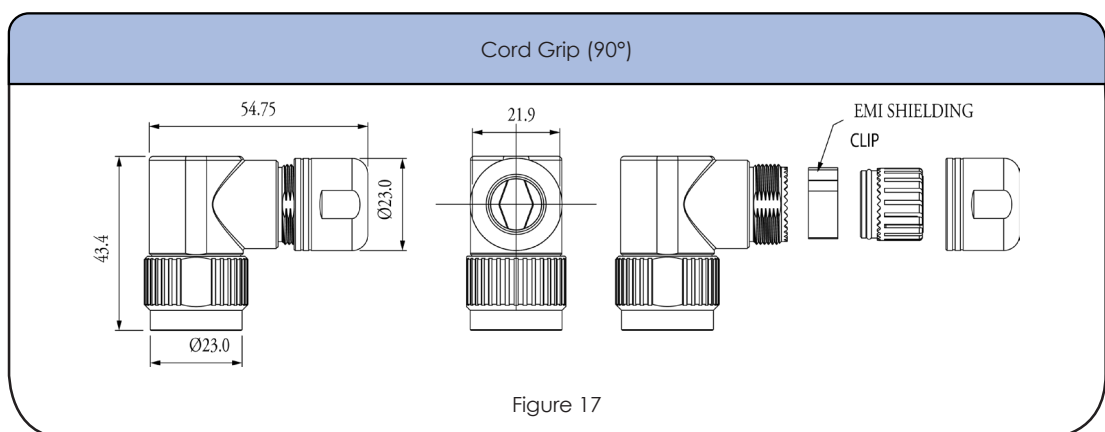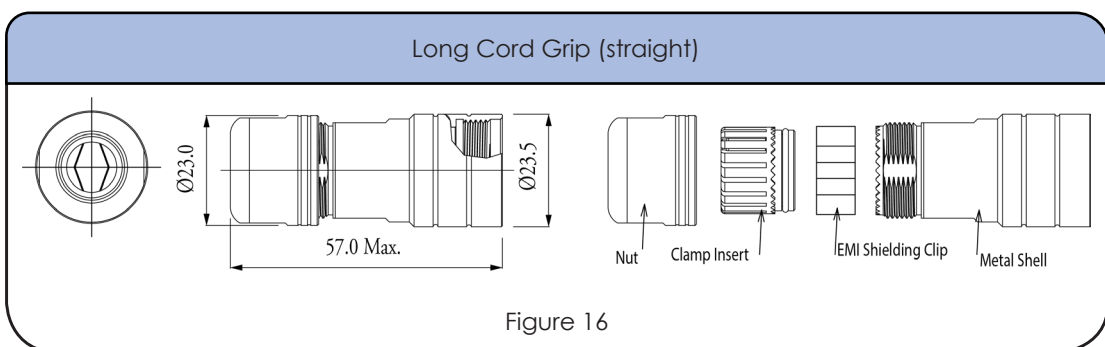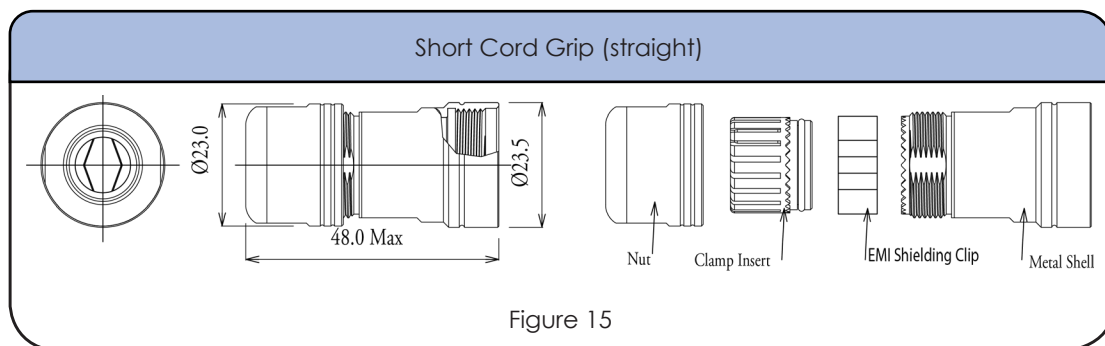

Shell Size: 14  
Sealing: IP67

Number of Contacts: 4  
Salt Spray: 48h

Contact Size: 2.5mm

## Contacts



## Crimp Contacts, Stamped & Formed

| Part Number |         | AWG   | Wire Range (mm <sup>2</sup> ) | Plating |
|-------------|---------|-------|-------------------------------|---------|
| Male        | Female  |       |                               |         |
| SP12A1T     | SS12A1T | 14-12 | 2.5-3.5                       | Tin     |

No machined contacts are available for this group

## Tools





Shell Size: 14    Number of Contacts: 4    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

## Accessories

|   |  |  |
|---|--|--|
| <p>Plug Dustcap with Chain</p>  <p>RT614DCG</p>                            | <p>Plug Dustcap without Chain</p>  <p>RT614DC</p>                                 | <p>Receptacle Dustcap with Chain</p>  <p>RT014DCG</p>                                   |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p>  <p>RT014RL</p> | <p>Receptacle Dustcap without Chain</p>  <p>RT014DC</p>                          | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p>  <p>RB00011914</p>       |
| <p>Sealing Plug</p>  <p>A114017</p>                                      | <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p>  <p>RTFD14B</p> | <p>Locking Clip with Lanyard</p>  <p>108039114</p> <p><b>NEW!</b><br/>See Page 16</p> |

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 68

Shell Size: 16    Number of Contacts: 4    Contact Size: 3.6mm  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

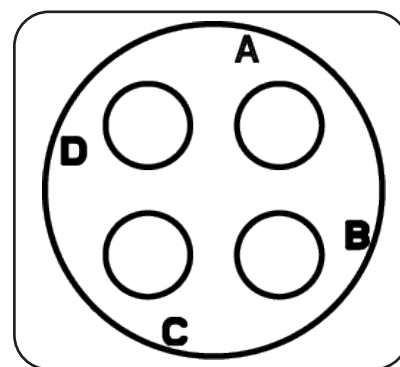

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07164PNH   | RT07164SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07164PNHEC | RT07164SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06164PNH   | RT06164SNH   | Plug   | 6               | 7      |
| RT06164PNHEC | RT06164SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00164PNH   | RT00164SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00164PNHEC | RT00164SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 68  
\*\*See page 65 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-16CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RTOS-16CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RTOL-16CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RTOL-16CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |
| RTOB-16CG-S1 | Cord Grip (90°)            | 9.5-14.5         | 17              | ✓         |
| RTOB-16CG-S2 | Cord Grip (90°)            | 13.5-17.0        | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 16      Number of Contacts: 4  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 3.6mm





## Dimensions Jam Nut Receptacle

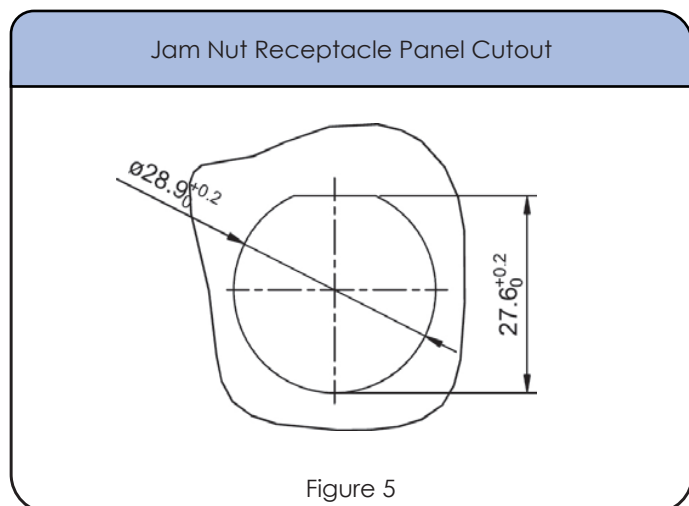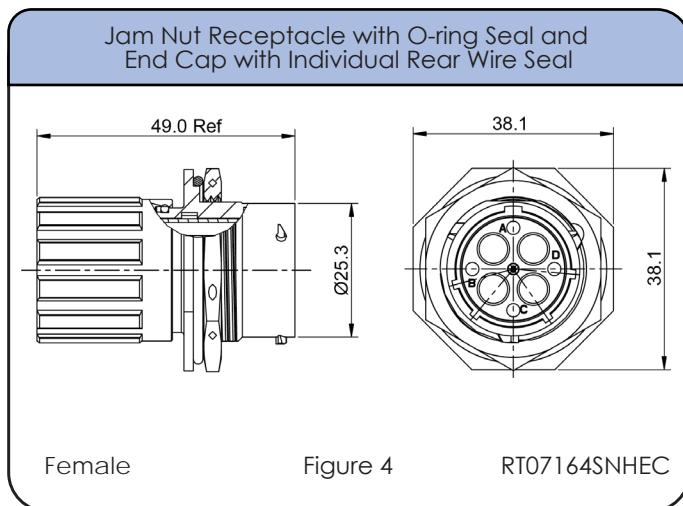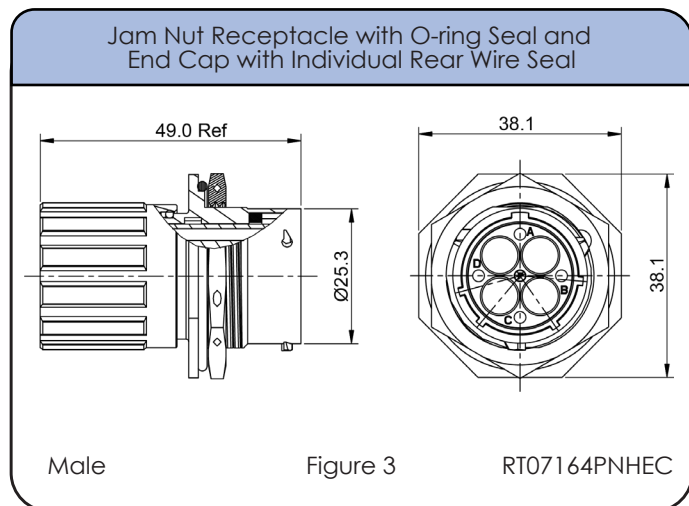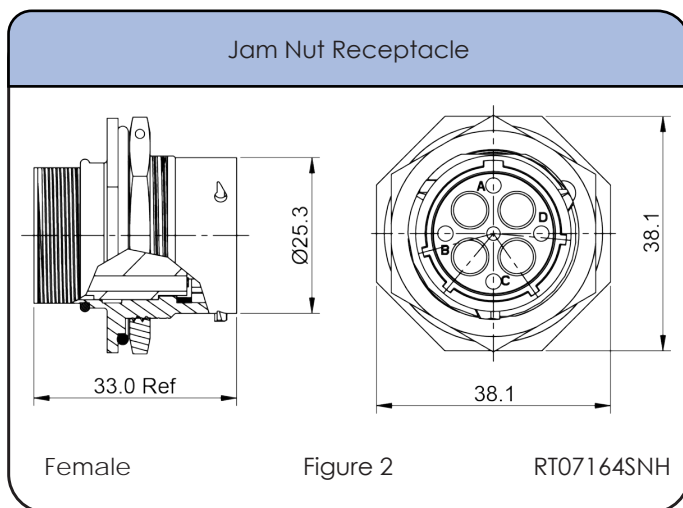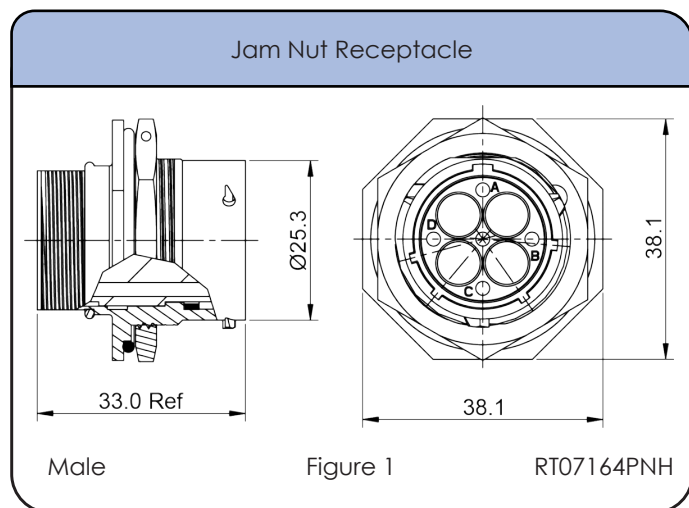

Shell Size: 16      Number of Contacts: 4  
Sealing: IP67      Salt Spray: 48h

Contact Size: 3.6mm

## Dimensions Plug


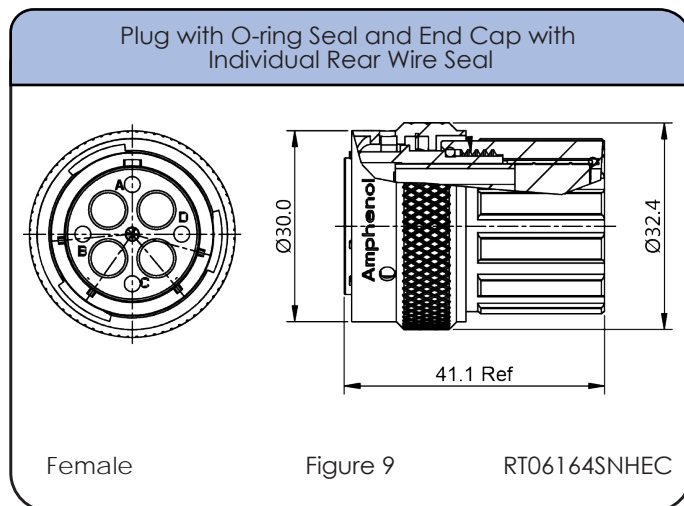
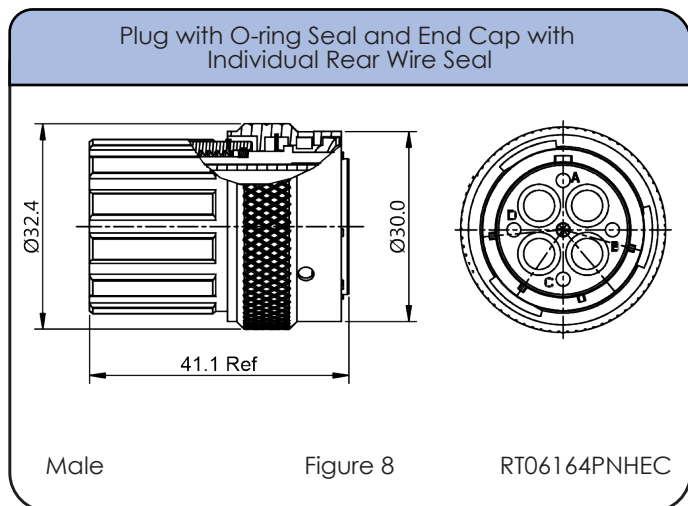
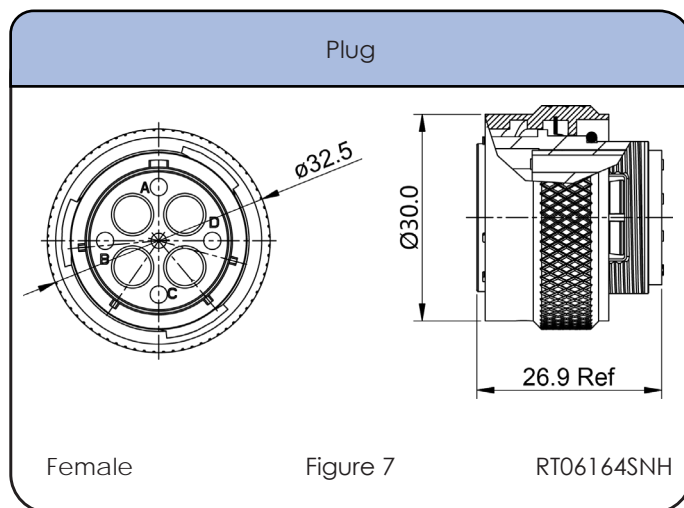
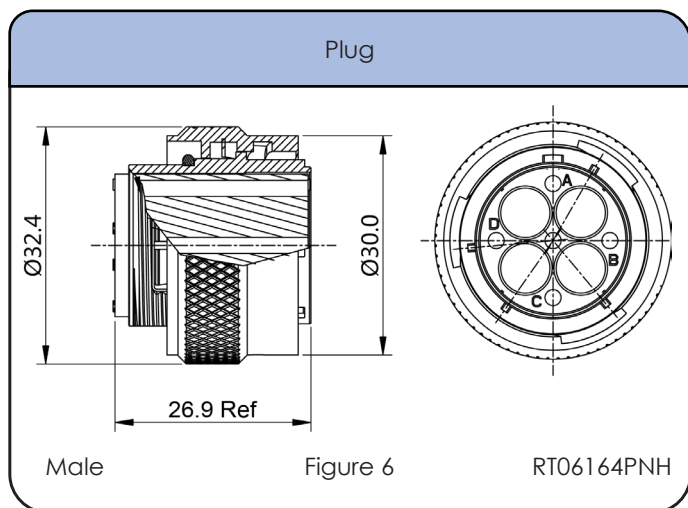


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 3.6mm        | Ø2.8mm - Ø5.8mm                       | 12 - 10 AWG |

Shell Size: 16    Number of Contacts: 4    Contact Size: 3.6mm  
 Sealing: IP67    Salt Spray: 48h




## Dimensions Square Flange Receptacle

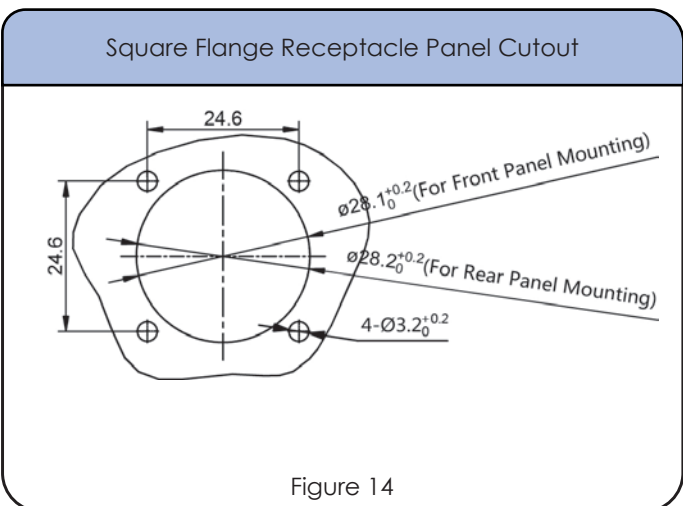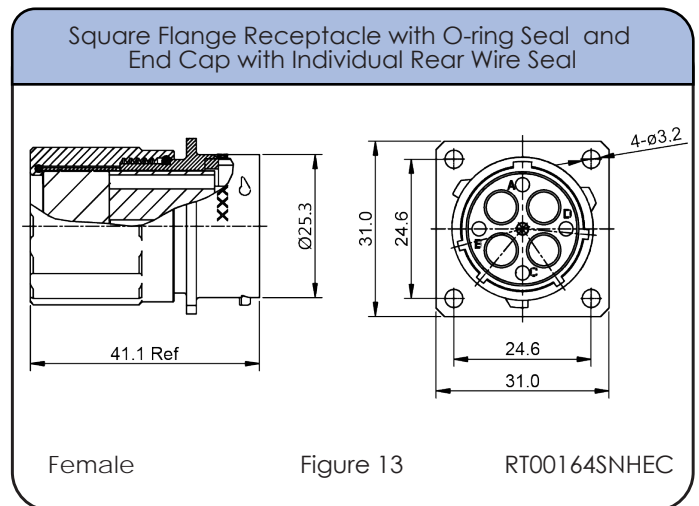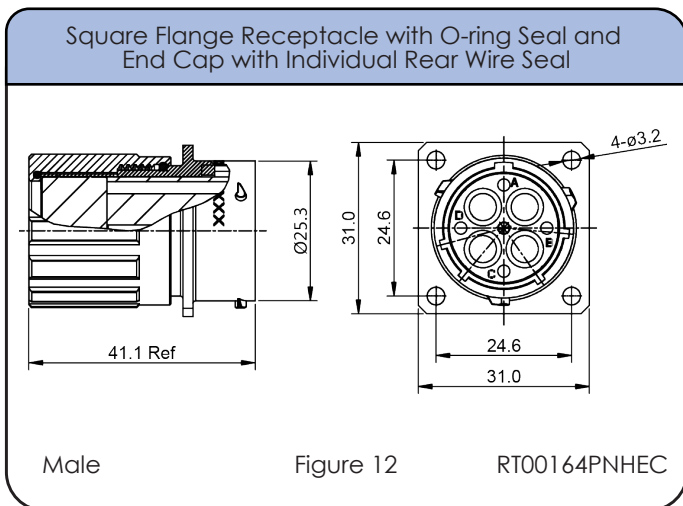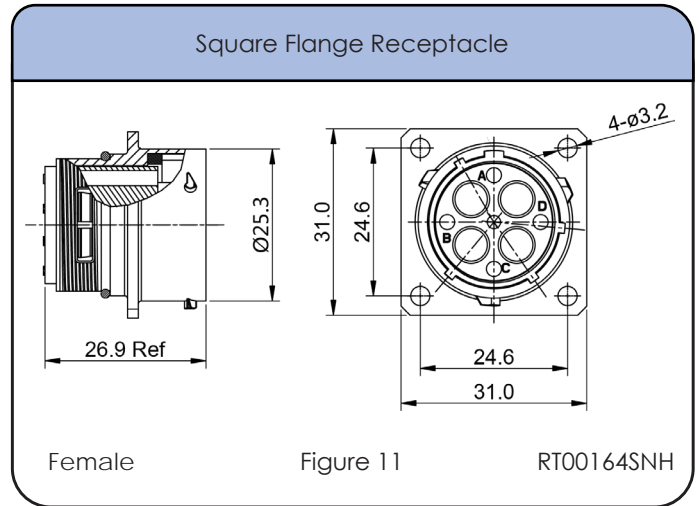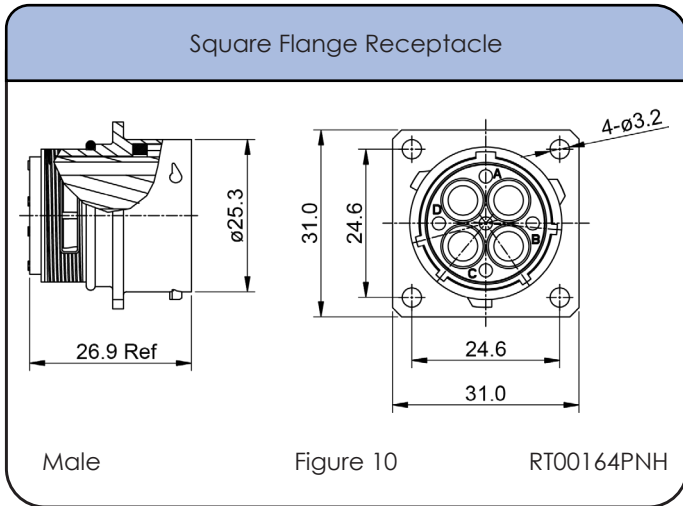



Shell Size: 16    Number of Contacts: 4    Contact Size: 3.6mm  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

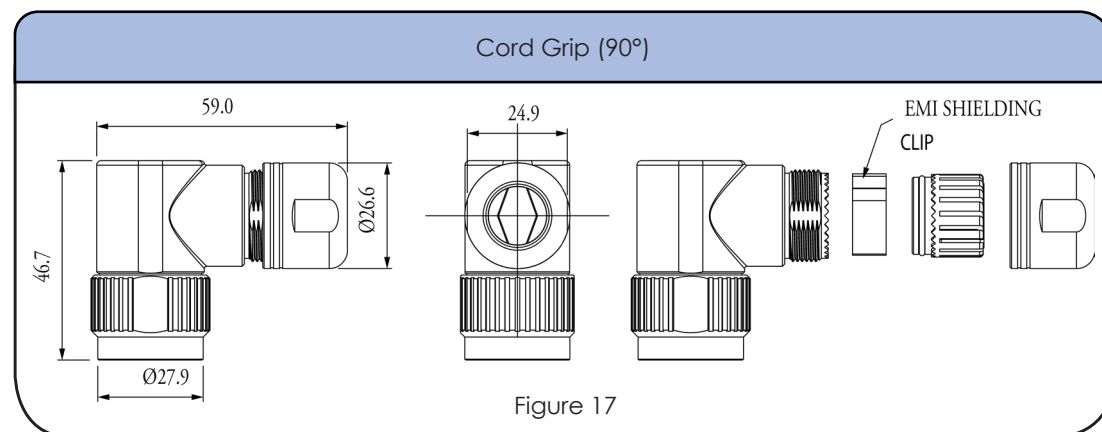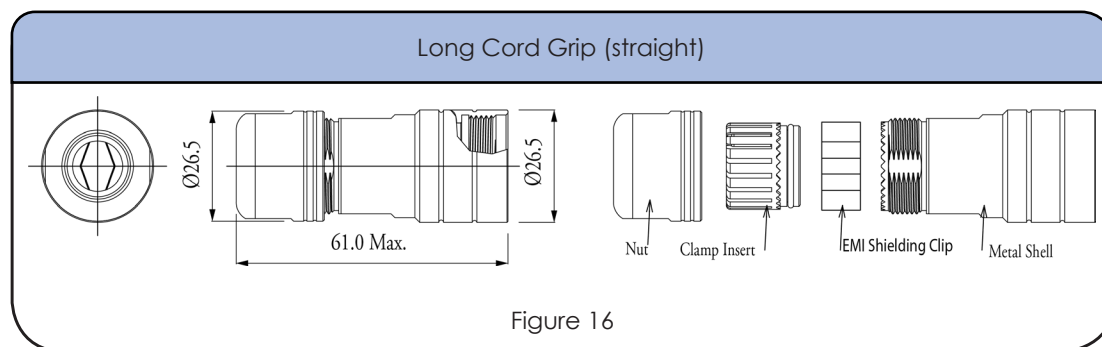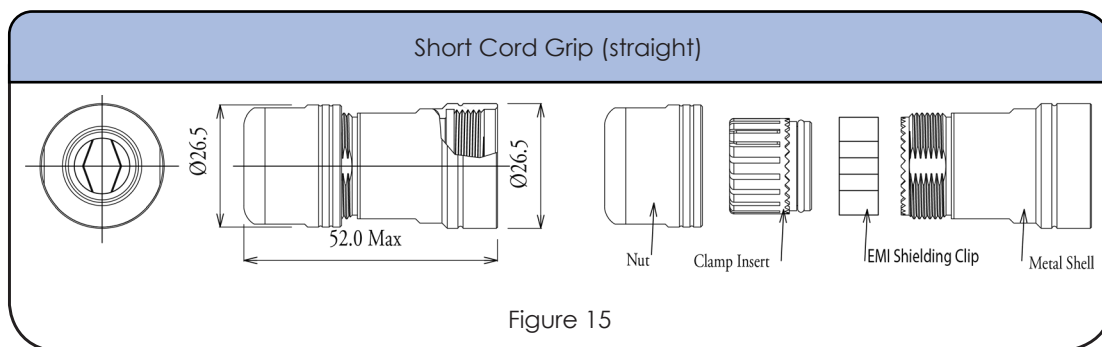


Shell Size: 16  
Sealing: IP67

Number of Contacts: 4  
Salt Spray: 48h

Contact Size: 3.6mm

## Contacts

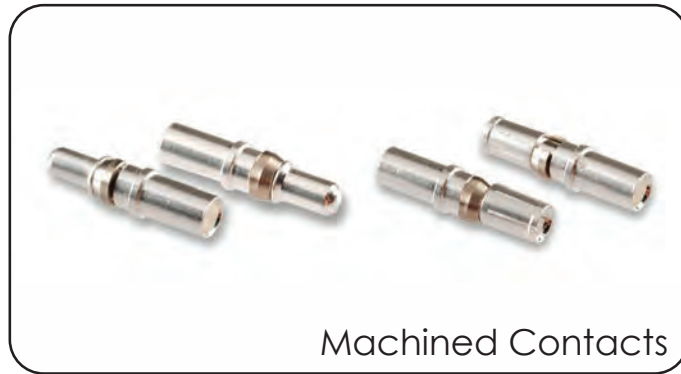





### Crimp Contacts, Machined

| Part Number |          | AWG | Wire Range (mm <sup>2</sup> ) | Plating       |
|-------------|----------|-----|-------------------------------|---------------|
| Male        | Female   |     |                               |               |
| MP10A23S    | MS10A23S | 8   | 3.0-6.0                       | Silver Plated |

no stamped & formed contacts are available for this group

## Tools

|  |   |
|--|---|
| <p>Extraction Tool 3.6mm Contact</p>  <p>QXRT08</p> | <p>Extraction Tool (for eco   mate® rm with Radsok) 3.6mm Contact</p>  <p>QXRT08R</p> |
| <p>Crimper</p>  <p>M300BT</p>                       | <p>Locator</p>  <p>TP968</p>  |

Shell Size: 16    Number of Contacts: 4    Contact Size: 3.6mm  
Sealing: IP67    Salt Spray: 48h

## Accessories

|  |  |   |
|--|--|---|
| <p>Plug Dustcap with Chain</p>  <p>RT616DCG</p>                                   | <p>Plug Dustcap without Chain</p>  <p>RT616DC</p>       | <p>Receptacle Dustcap with Chain</p>  <p>RT016DCG</p>                            |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p>  <p>RT016RL</p>        | <p>Receptacle Dustcap without Chain</p>  <p>RT016DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p>  <p>RB00011916</p> |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p>  <p>RTFD16B</p> | <p>Locking Clip with Lanyard</p>  <p>108039116</p>    | <p>NEW!<br/>See Page 16</p>   |

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



**OR**  
Square Flange Receptacles



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 76

Shell Size: 10    Number of Contacts: 6    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

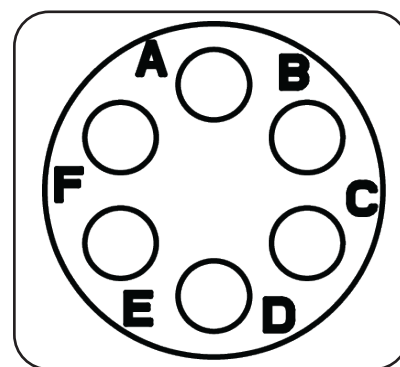

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RTOW7106PNH   | RTOW7106SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RTOW7106PNHEC | RTOW7106SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RTOW7106PNH-K | RTOW7106SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RTOW6106PNH   | RTOW6106SNH   | Plug   | 6               | 7      |
| RTOW6106PNHEC | RTOW6106SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RTOW6106PNH-K | RTOW6106SNH-K | Plug Kit   | 6               | 7      |
| RTOW0106PNH   | RTOW0106SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RTOW0106PNHEC | RTOW0106SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RTOW0106PNH-K | RTOW0106SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 76

\*\*See page 73 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-10CG-S1 | Short Cord Grip (straight) | 3-6.5            | 15              | ✓         |
| RTOS-10CG-S2 | Short Cord Grip (straight) | 5-8.5            | 15              | ✓         |
| RTOL-10CG-S1 | Long Cord Grip (straight)  | 3-6.5            | 16              | ✓         |
| RTOL-10CG-S2 | Long Cord Grip (straight)  | 5-8.5            | 16              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 10    Number of Contacts: 6  
 Sealing: IP67    Salt Spray: 48h

Contact Size: 20





### Dimensions Jam Nut Receptacle

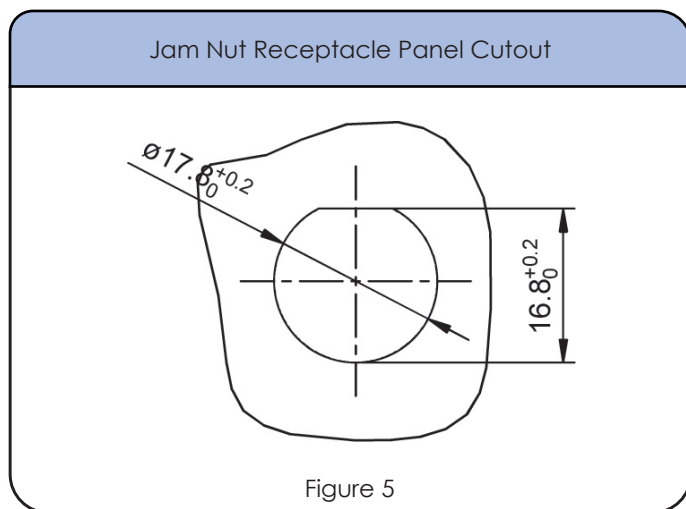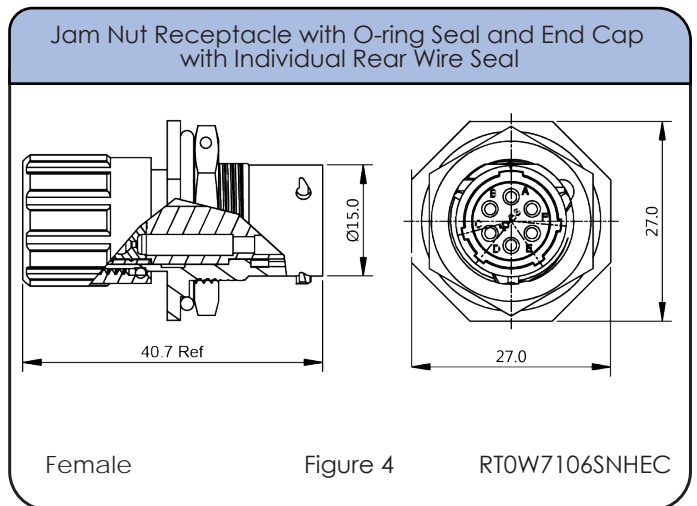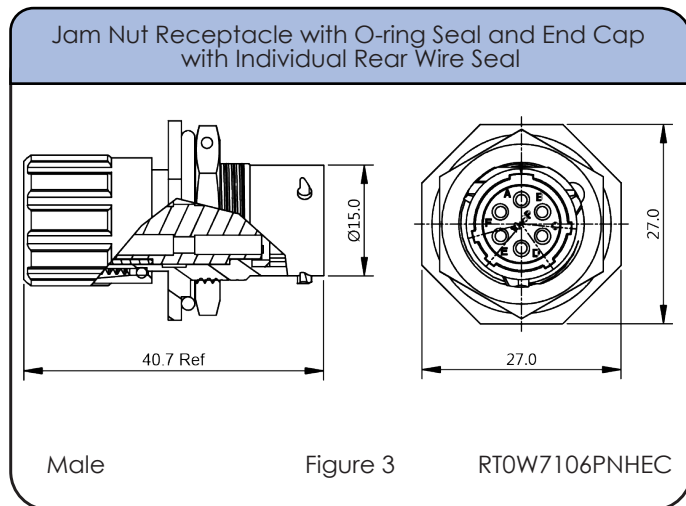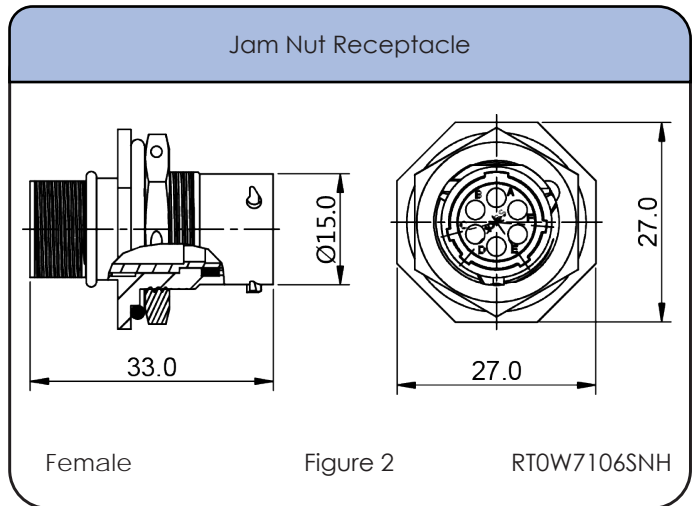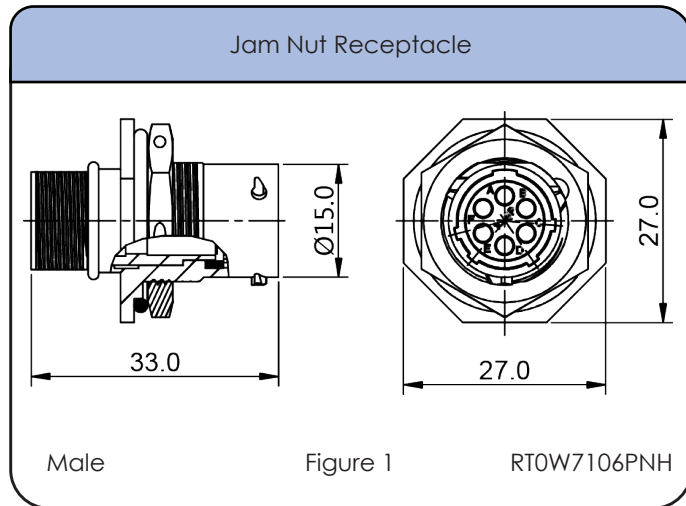



Shell Size: 10    Number of Contacts: 6    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

## Dimensions Plug


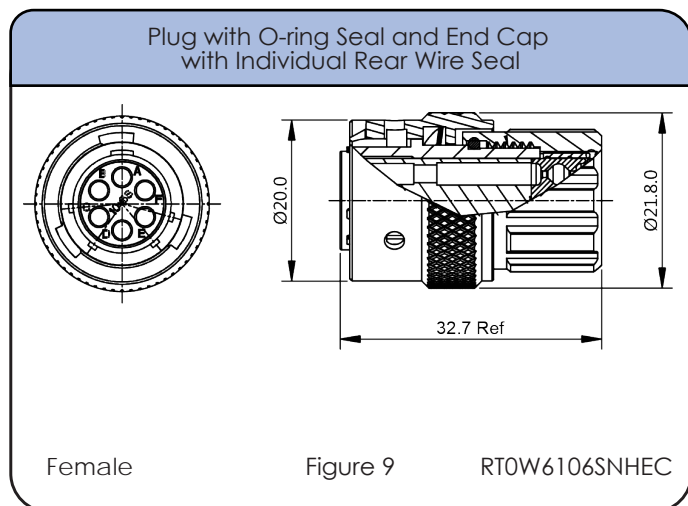
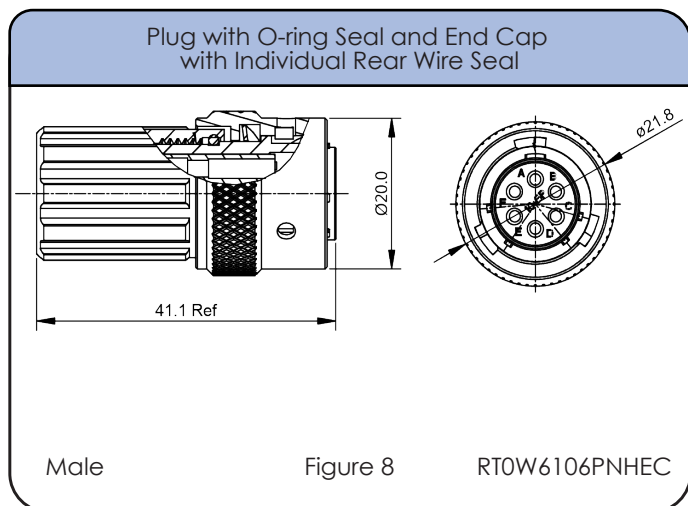
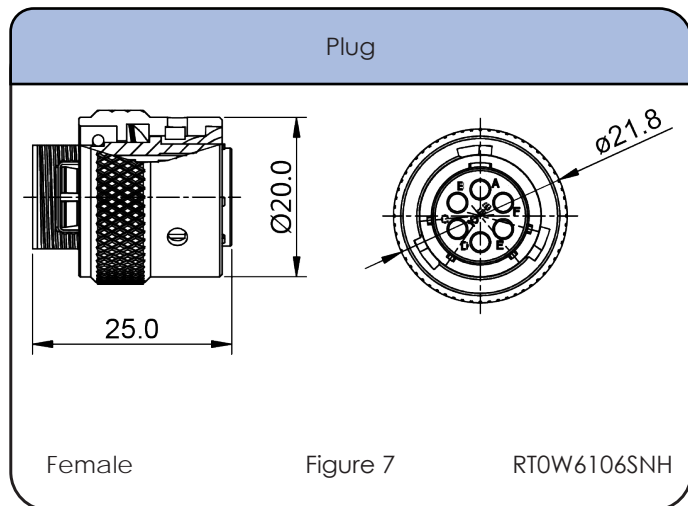
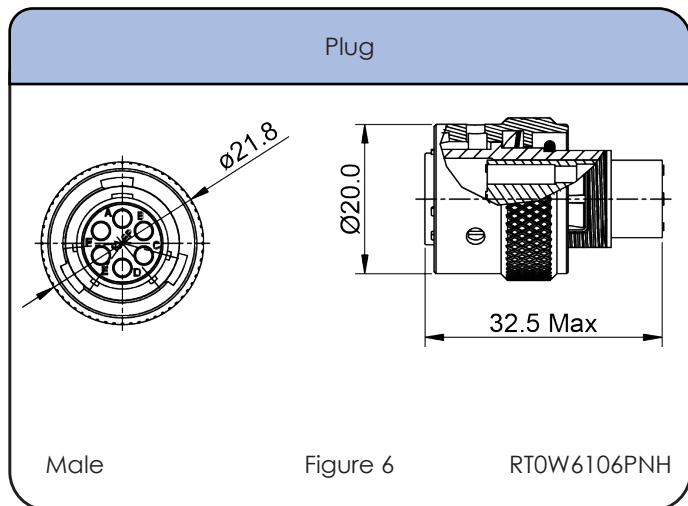


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 20           | Ø1.6mm - Ø2.6mm                       | 20 - 30 AWG |



Shell Size: 10    Number of Contacts: 6    Contact Size: 20  
 Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

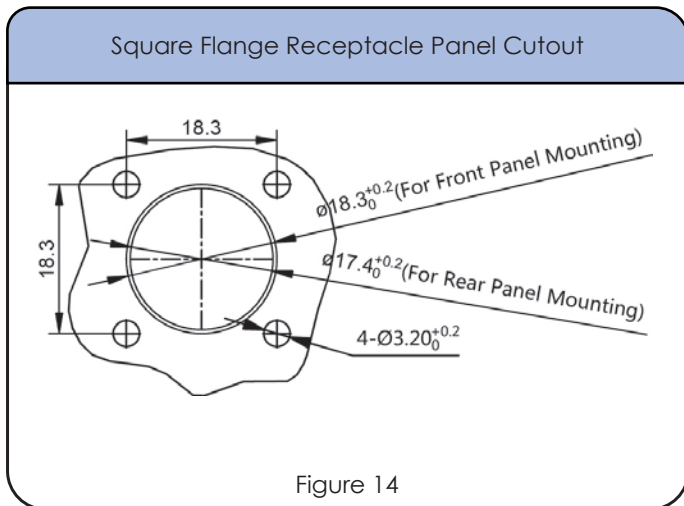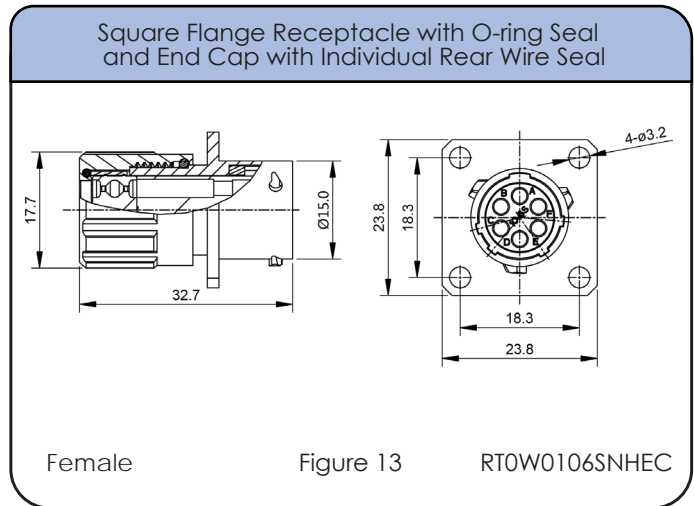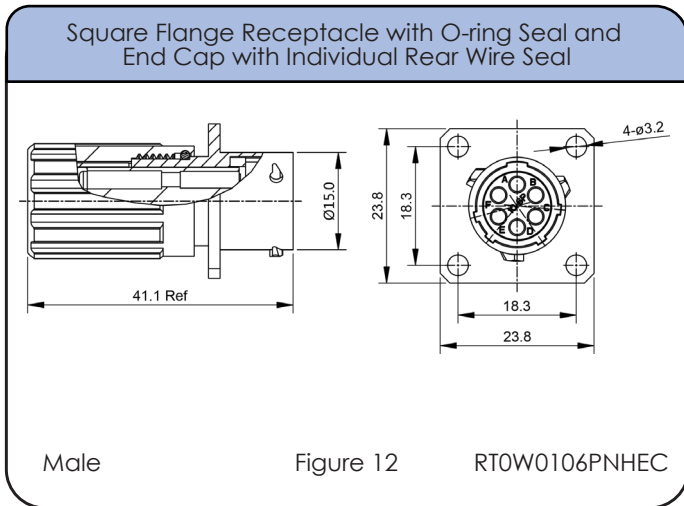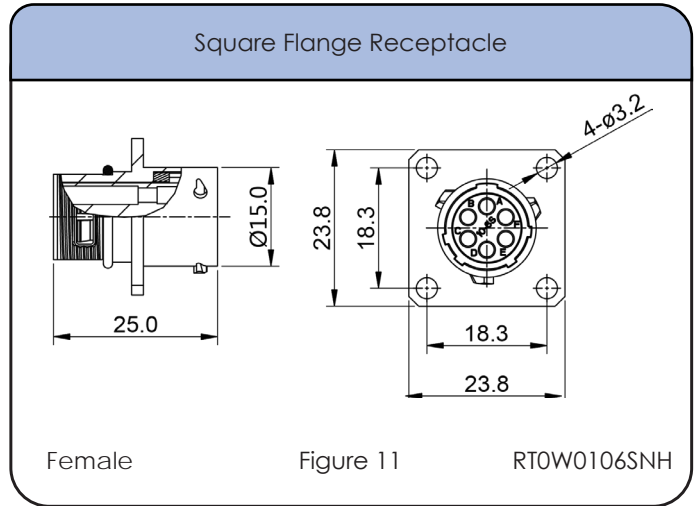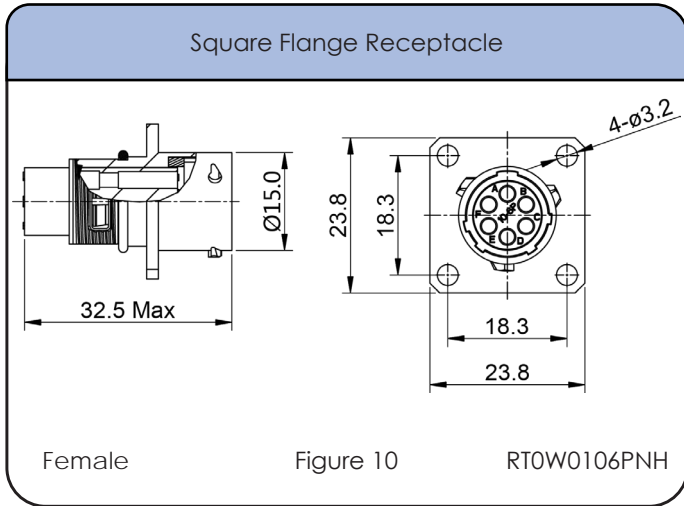

Shell Size: 10    Number of Contacts: 6    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h




## Dimensions Backshell

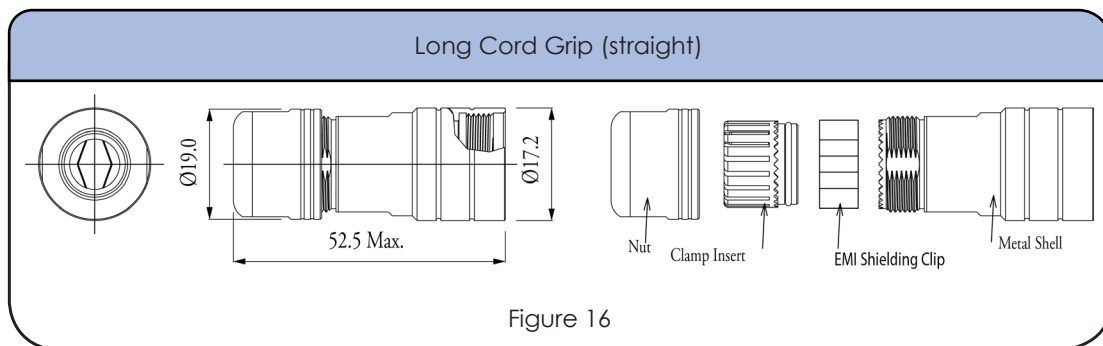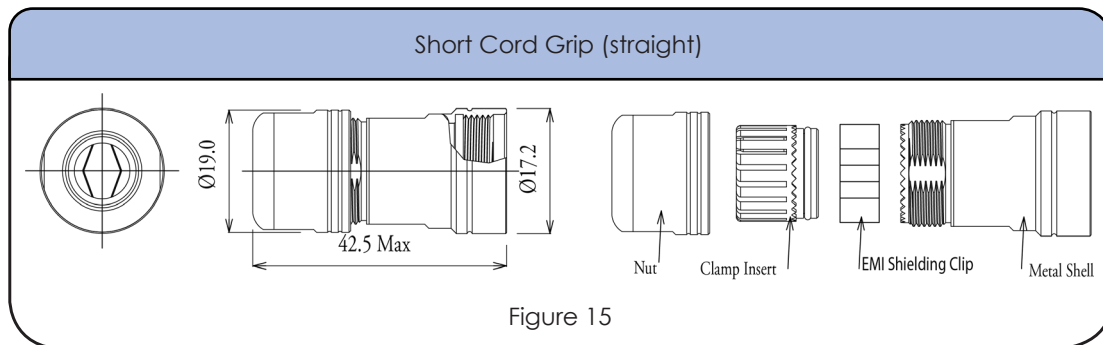

## Accessories



NEW!  
See  
Page  
16



Shell Size: 10  
Sealing: IP67

Number of Contacts: 6  
Salt Spray: 48h

Contact Size: 20

## Contacts



## Crimp Contacts, Machined (7.5A)

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP20W23F    | MS20W23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20W23G5   | MS20W23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 26-24 | .13-.25                       | Gold Flash |
| MP24W23G5   | MS24W23G5  | 26-24 | .13-.25                       | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 26-24 | .13-.25                       | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 26-24 | .13-.25                       | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 26-24 | .13-.25                       | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 30-28 | .05-.08                       | Gold Flash |
| MP28W23G5   | MS28W23G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools



Shell Size: 10    Number of Contacts: 6    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h


## Contacts (con't)



## Crimp Contacts, Stamped & Formed (5A)

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP20W2F     | SS20W2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20W2G5    | SS20W2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20W2G10   | SS20W2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24W2F     | SS24W2F   | 26-24 | .14-.25                       | Gold Flash |
| SP24W2G5    | SS24W2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 26-24 | .14-.25                       | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 30-28 | .05-.08                       | Gold Flash |
| SP28W2G5    | SS28W2G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools

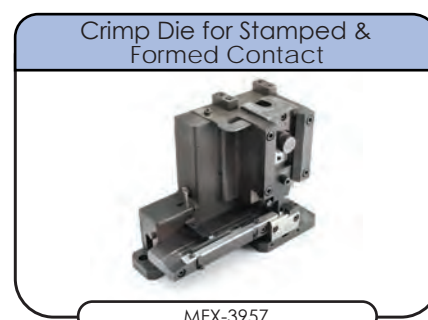

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



**OR**  
Square Flange Receptacles



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 84




Shell Size: 12    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

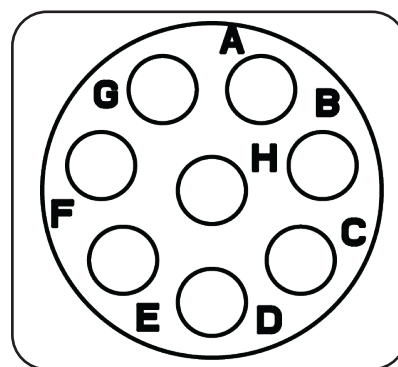

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07128PNH   | RT07128SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07128PNHEC | RT07128SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT07128PNH-K | RT07128SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT06128PNH   | RT06128SNH   | Plug   | 6               | 7      |
| RT06128PNHEC | RT06128SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT06128PNH-K | RT06128SNH-K | Plug Kit   | 6               | 7      |
| RT00128PNH   | RT00128SNH   | Square Flange Receptacle   | 10              | 11,14  |
| RT00128PNHEC | RT00128SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT00128PNH-K | RT00128SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 84

\*\*See page 81 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-12CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RT0S-12CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RT0L-12CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RT0L-12CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RT0B-12CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RT0B-12CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 12    Number of Contacts: 8  
 Sealing: IP67    Salt Spray: 48h





Contact Size: 16

### Dimensions Jam Nut Receptacle

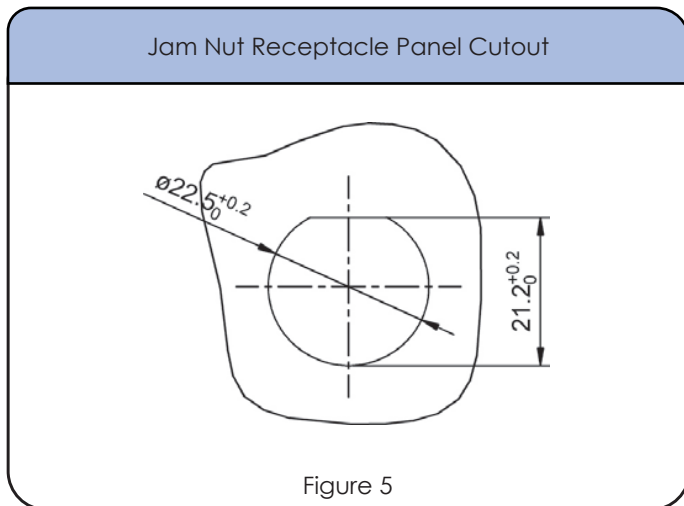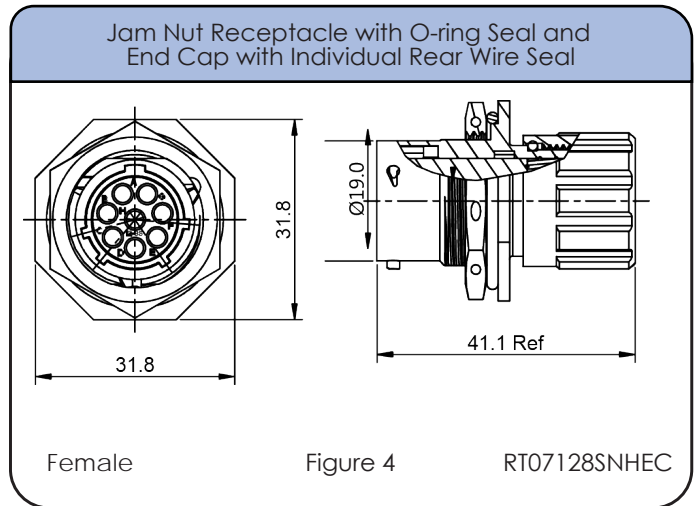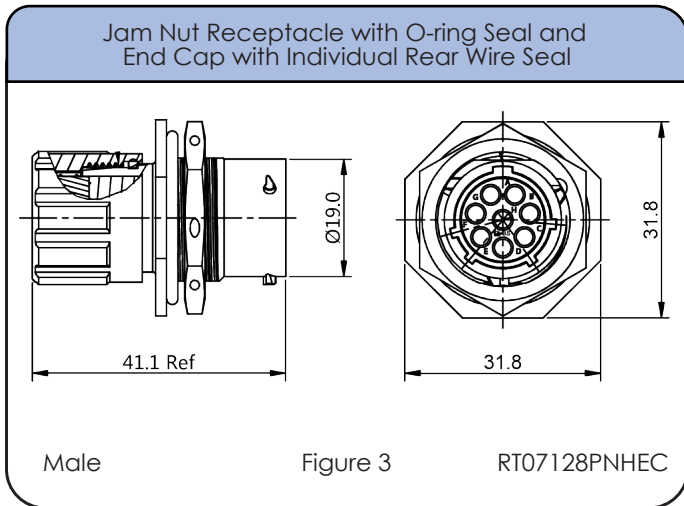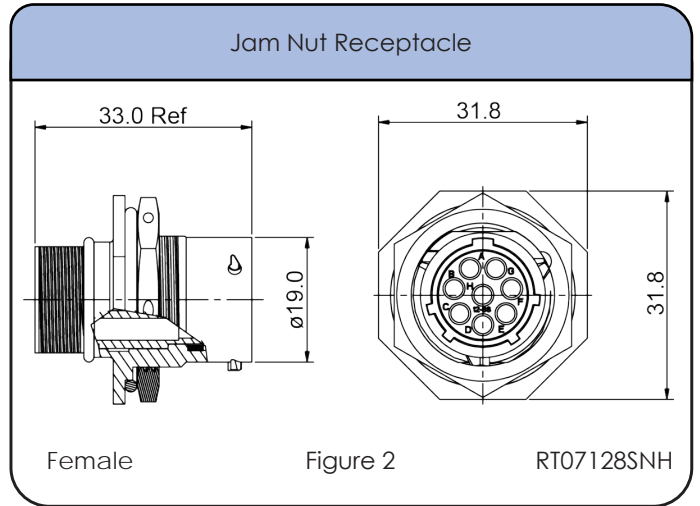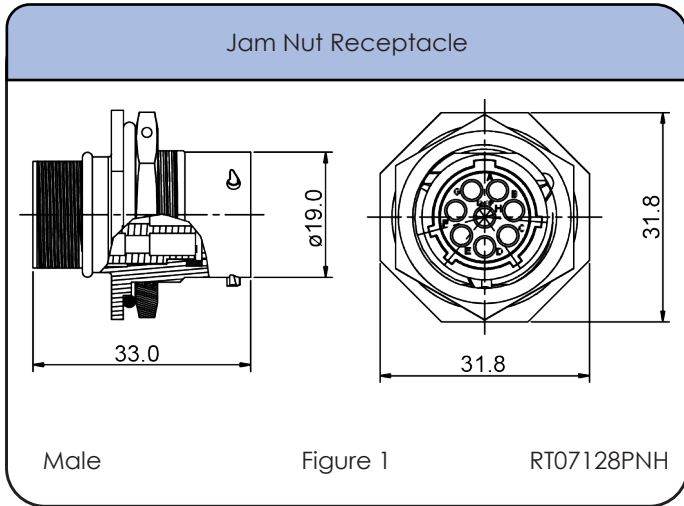

Shell Size: 12      Number of Contacts: 8      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Dimensions Plug


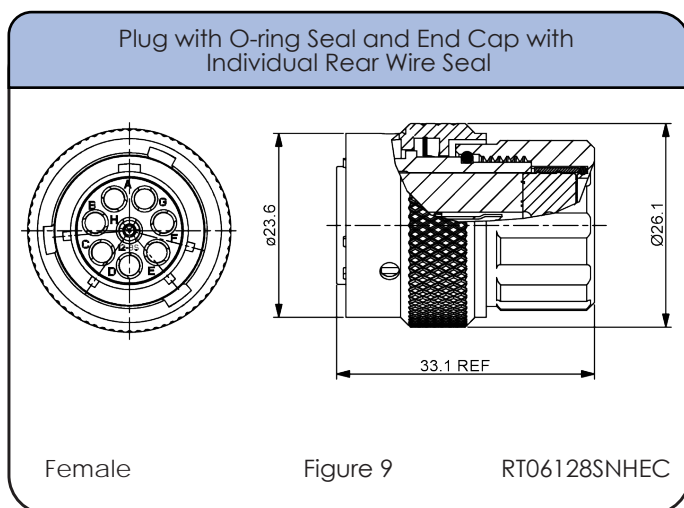
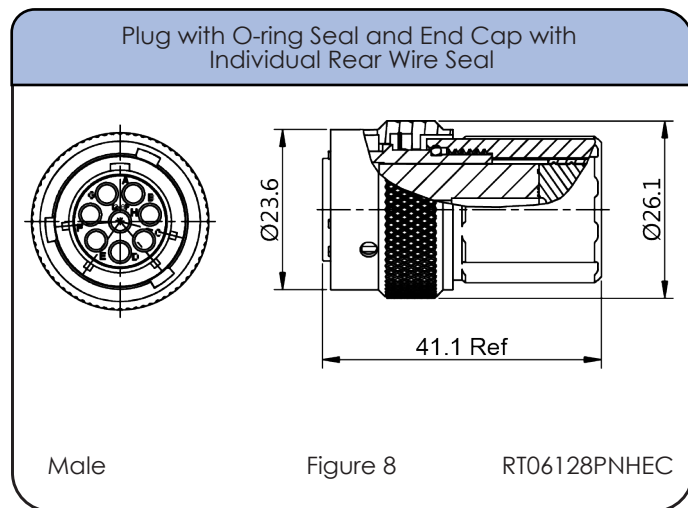
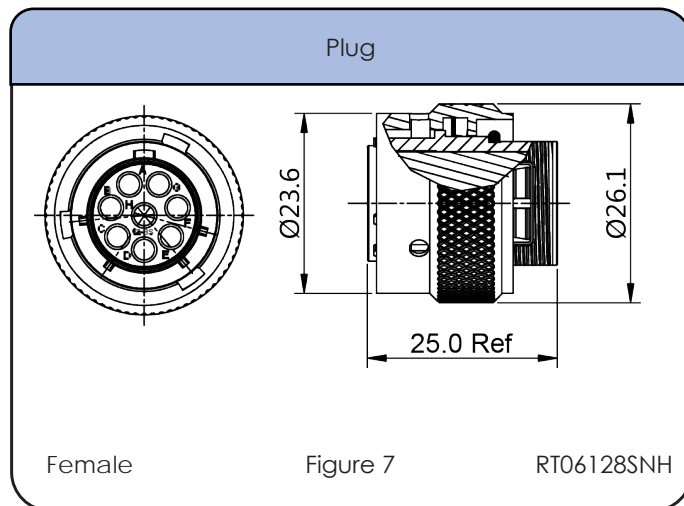
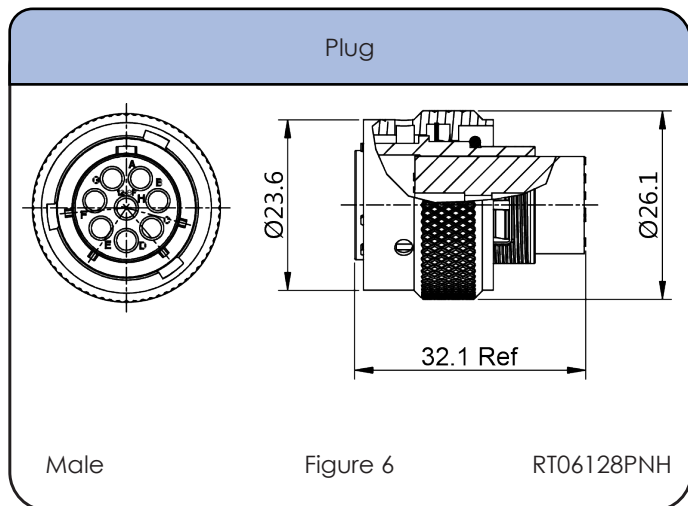


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |




Shell Size: 12    Number of Contacts: 8    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

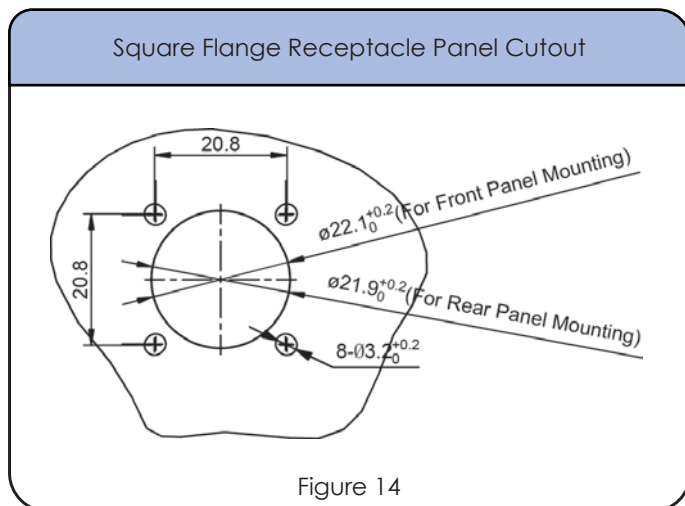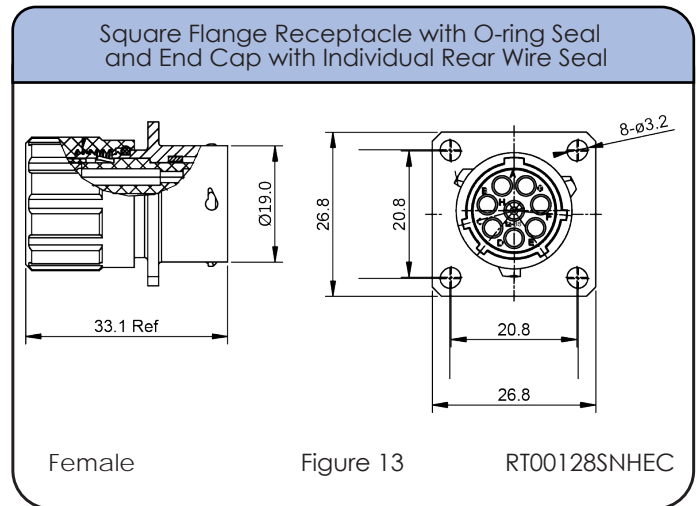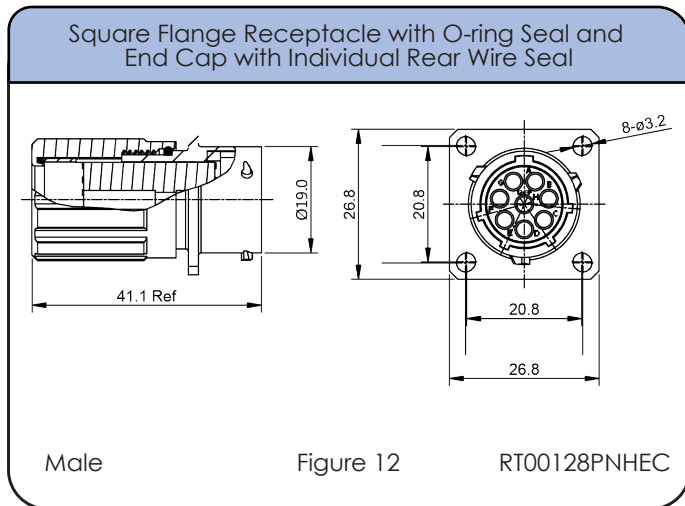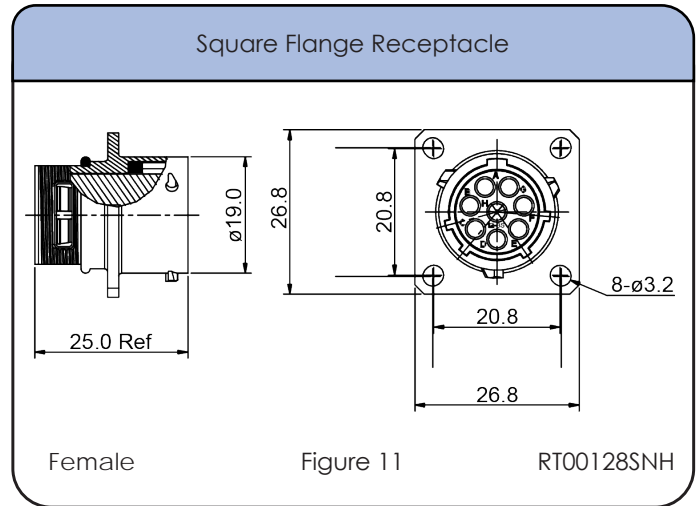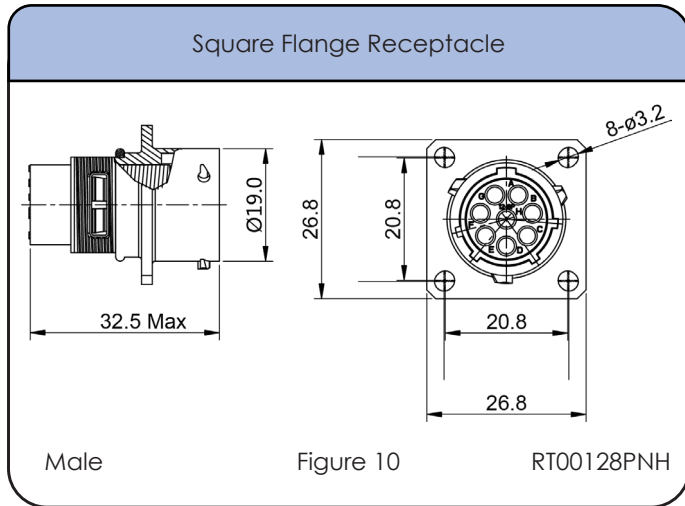

Shell Size: 12    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

## Dimensions Backshell

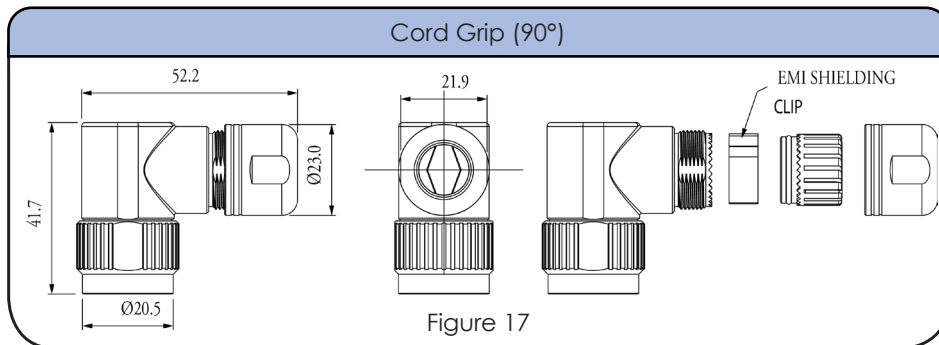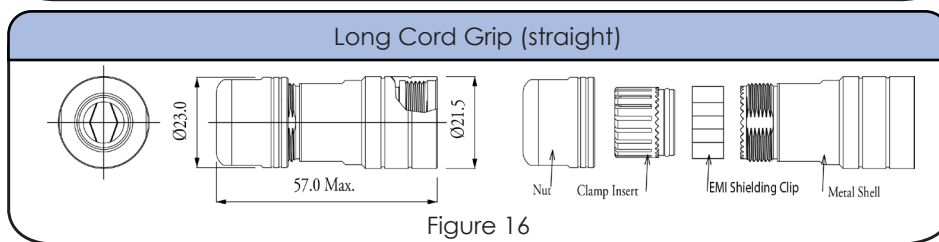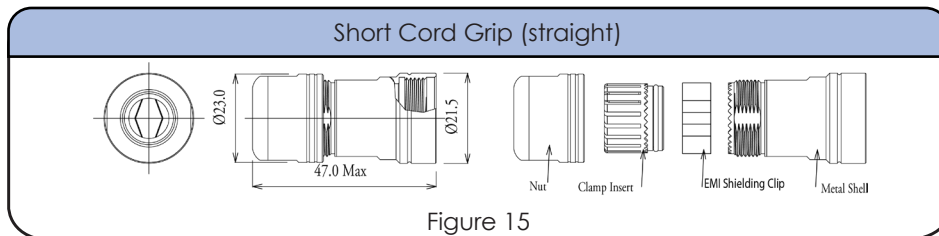

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039112</p>                              | <p>Plug Dustcap with Chain</p> <p>RT612DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT612DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT012DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT012RL</p>       | <p>Receptacle Dustcap without Chain</p> <p>RT012DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011912</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD12B</p> |  |   |  |

NEW!  
see  
Page  
16

Shell Size: 12      Number of Contacts: 8      Contact Size: 16  
 Sealing: IP67      Salt Spray: 48h

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools





Shell Size: 12    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h


## Contacts (con't)



## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

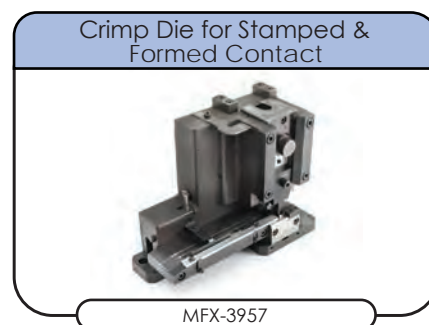

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 92

Shell Size: 14    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate® rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

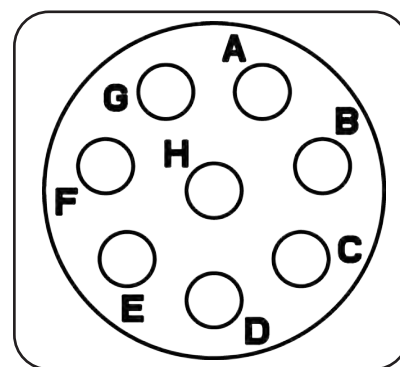

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07148PNH   | RT07148SNH   | Jam Nut Receptacle with O-ring Seal  | 1,5             | 2,5    |
| RT07148PNHEC | RT07148SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06148PNH   | RT06148SNH   | Plug with O-ring Seal  | 6               | 7      |
| RT06148PNHEC | RT06148SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00148PNH   | RT00148SNH   | Square Flange Receptacle with O-ring Seal**  | 10,14           | 11,14  |
| RT00148PNHEC | RT00148SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 92  
\*\*See page 89 for the real seal wire range

### Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-14CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RT0S-14CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RT0L-14CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RT0L-14CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RT0B-14CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RT0B-14CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 14    Number of Contacts: 8  
 Sealing: IP67    Salt Spray: 48h





Contact Size: 16

### Dimensions Jam Nut Receptacle

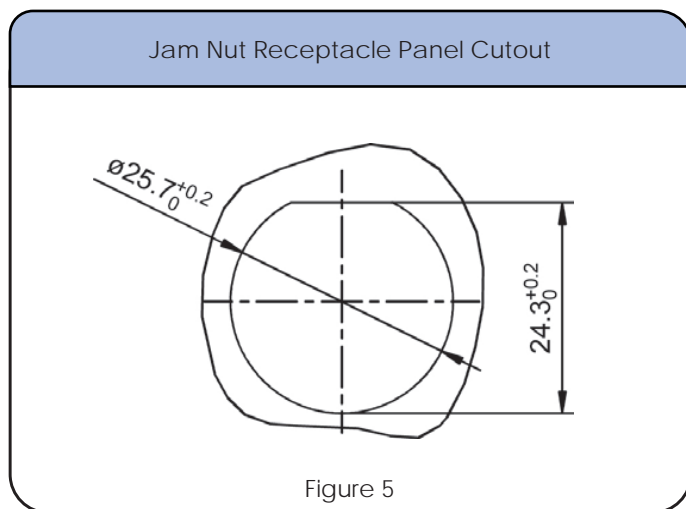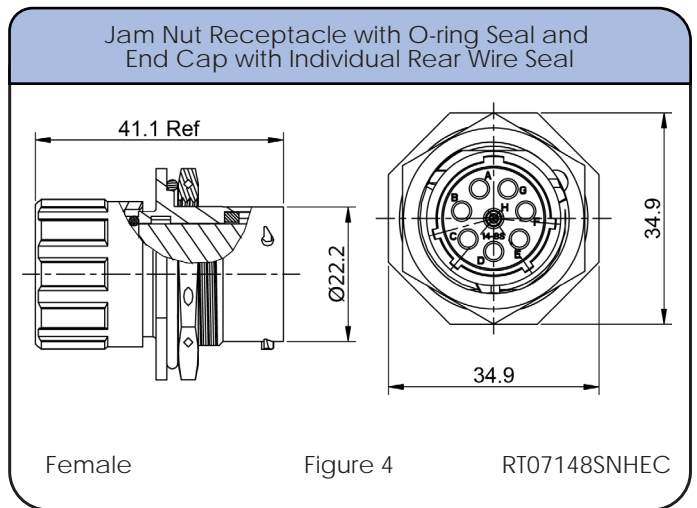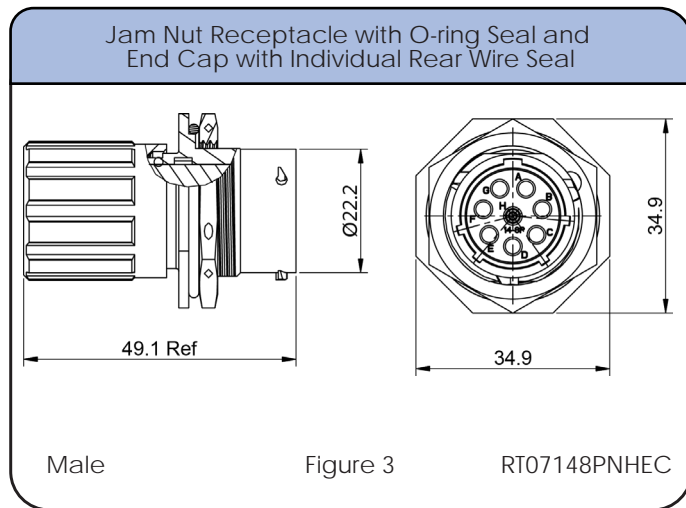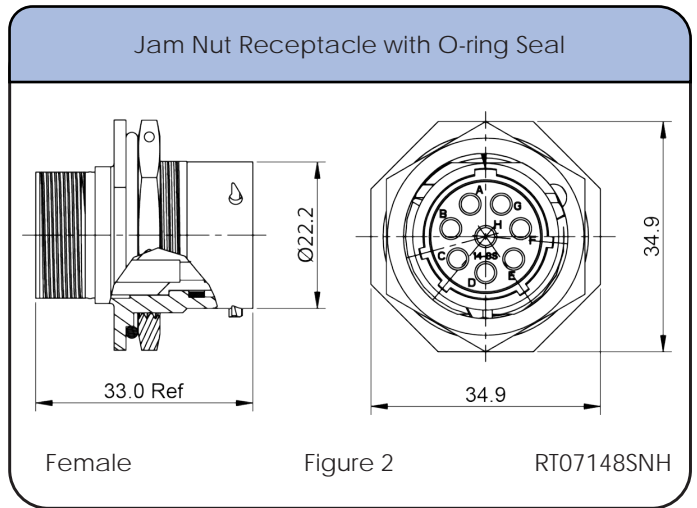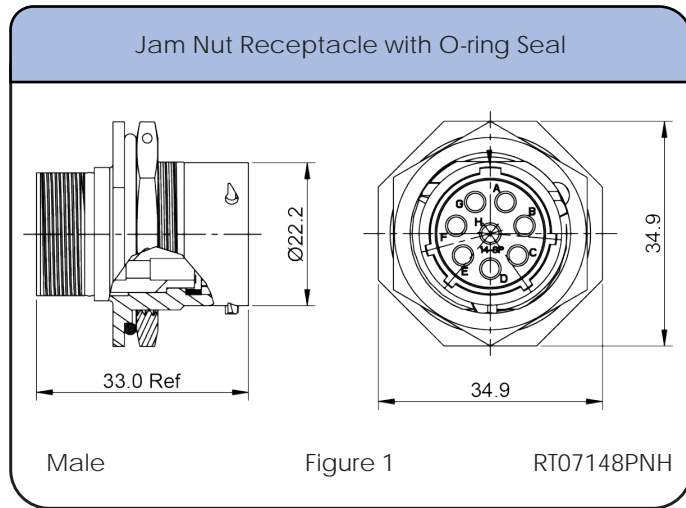

Shell Size: 14    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

### Dimensions Plug


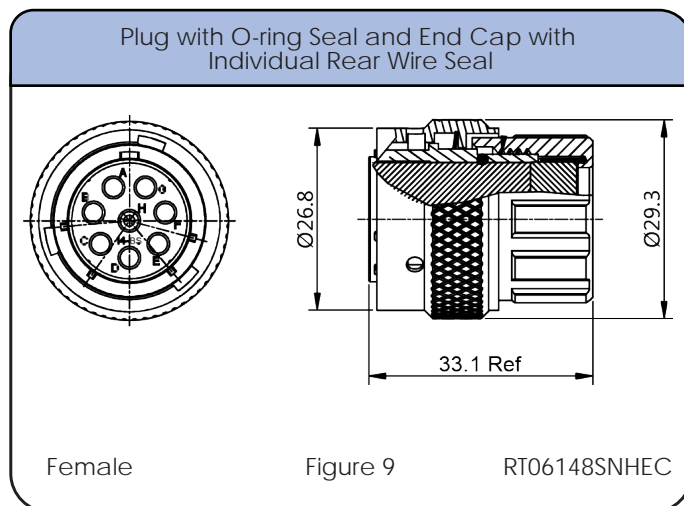
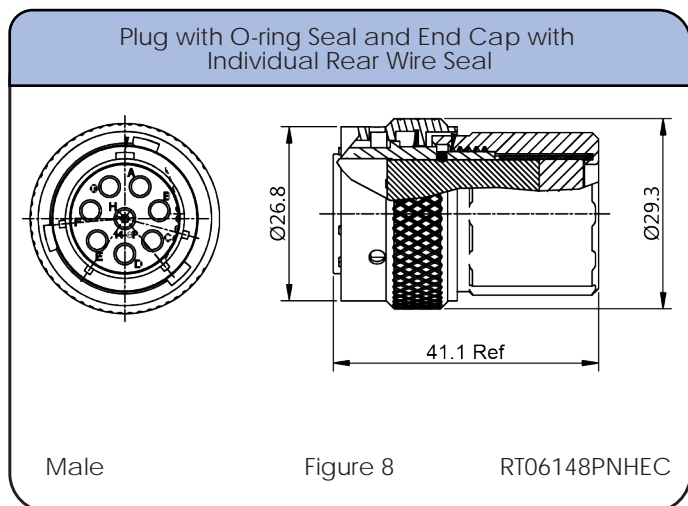
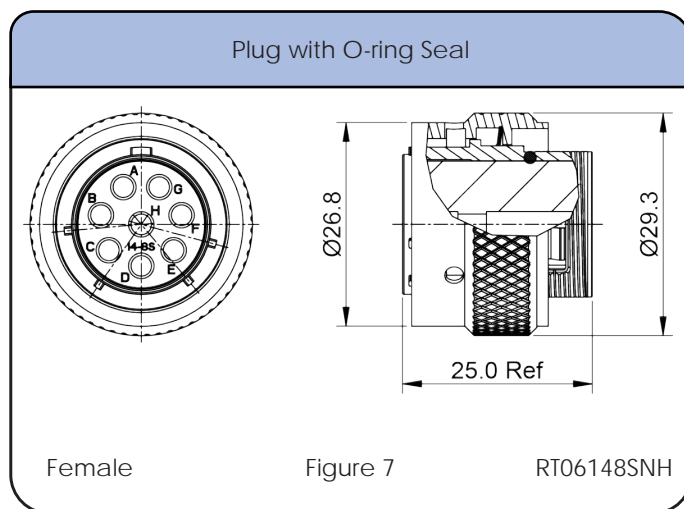
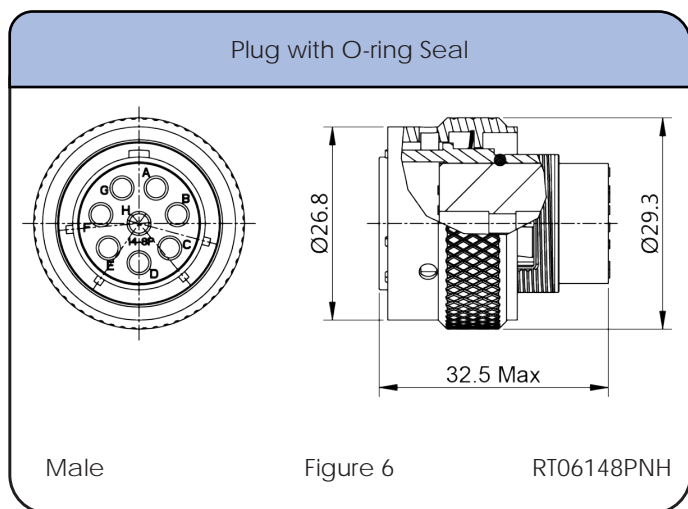


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 14    Number of Contacts: 8    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

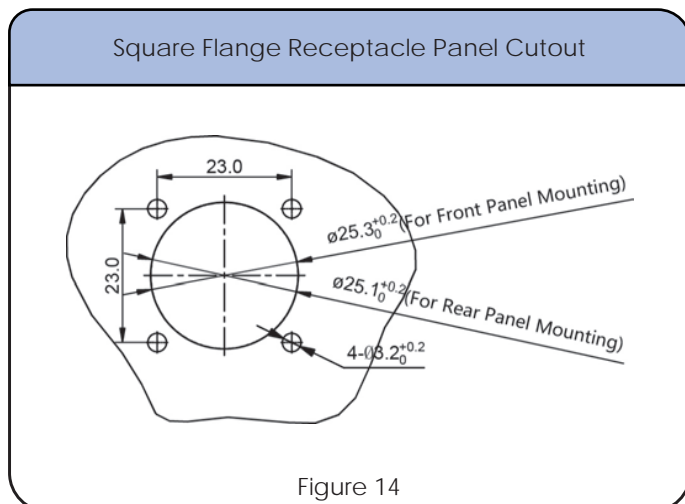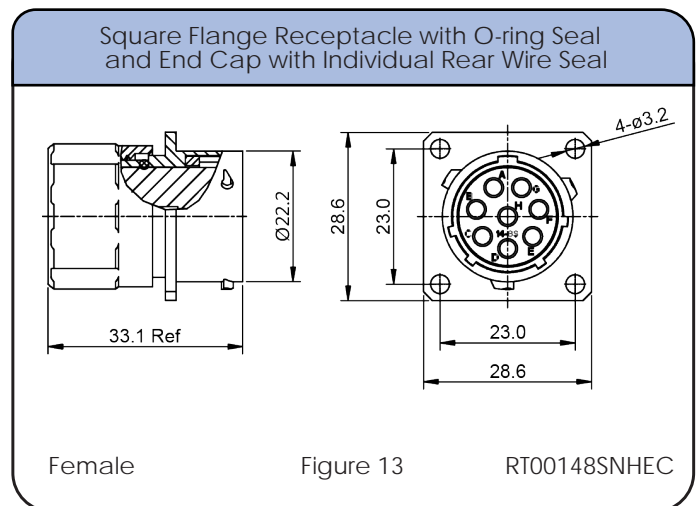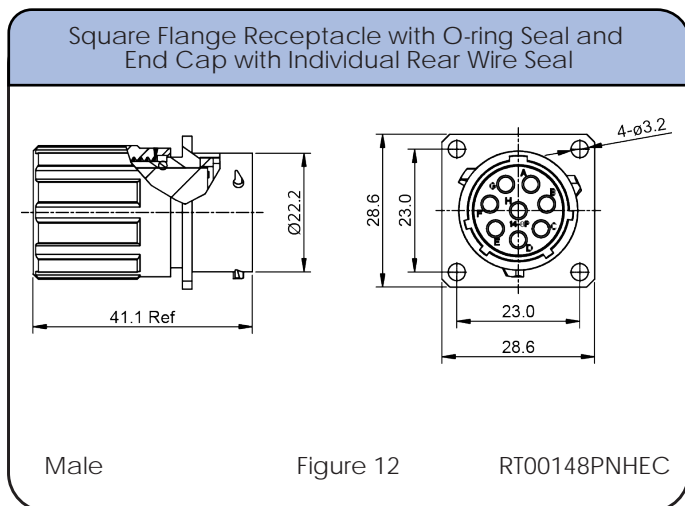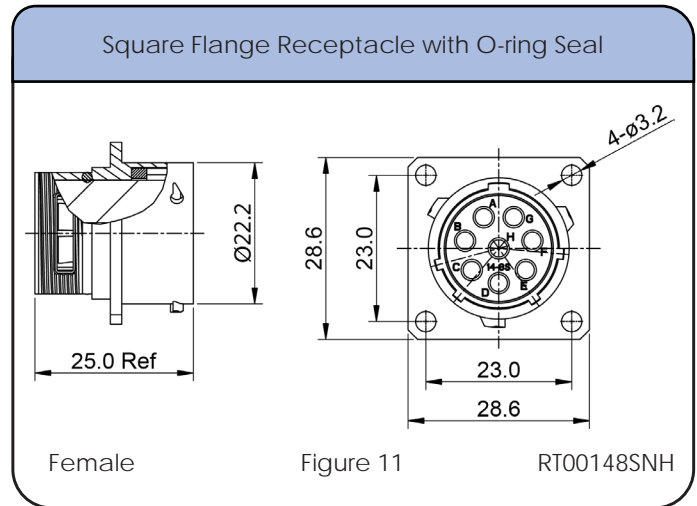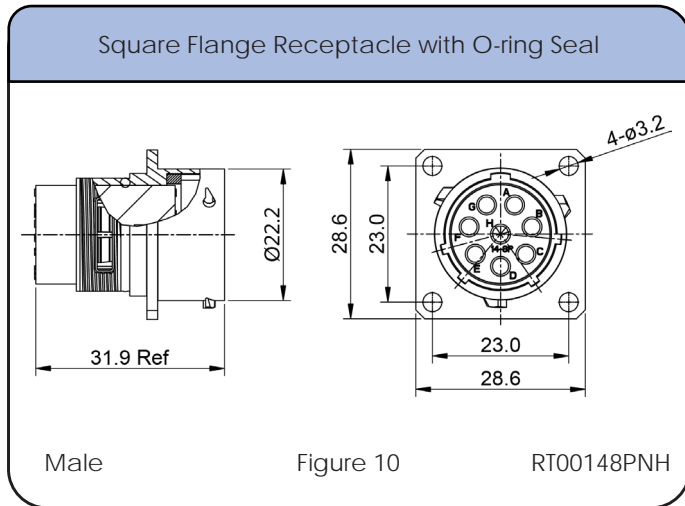



Shell Size: 14    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

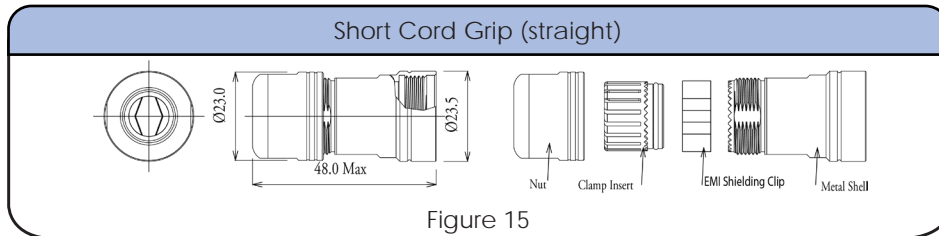


Figure 15

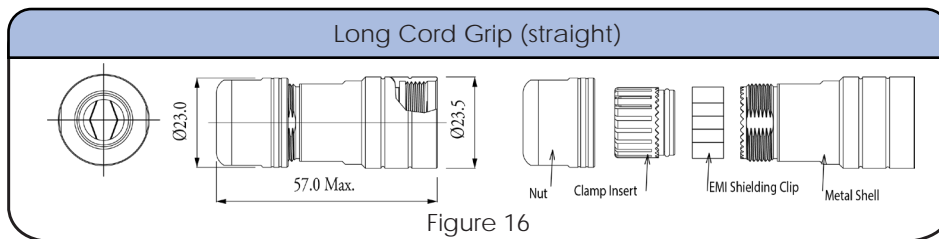


Figure 16

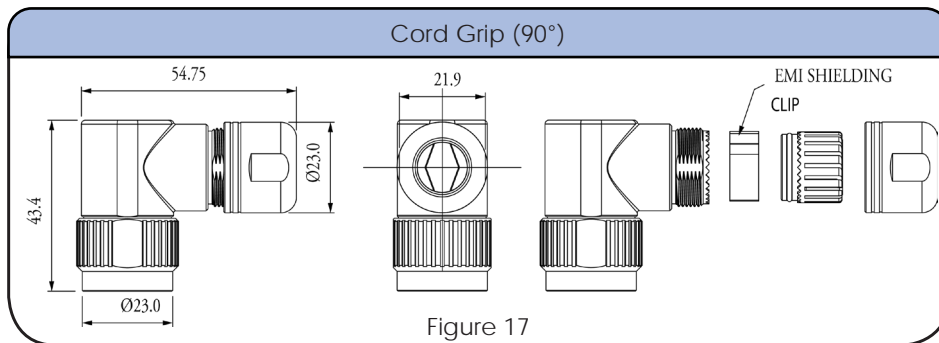


Figure 17

### Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039114</p>                              | <p>Plug Dustcap with Chain</p> <p>RT614DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT614DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT014DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT014RL</p>       | <p>Receptacle Dustcap without Chain</p> <p>RT014DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011914</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD12B</p> |  |   |  |

NEW!  
See  
Page  
16

Shell Size: 14  
Sealing: IP67

Number of Contacts: 8  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Crimp Tool for  
Machined Contacts



MFX-3959

Pneumatic Crimp Tool for  
Machined Contacts



MFX-3960

Shell Size: 14    Number of Contacts: 8    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

## Contacts (con't)



Stamped & Formed Contacts

## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools




Contact Extraction Tool, #16 (Ø 1.6) Contact

OXRT16



Hand Tool, Stamped & Formed Contact, Size16, 20-14AWG

MFX-3954

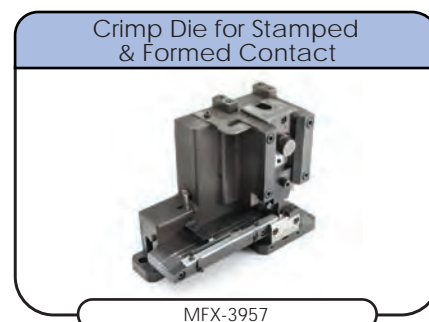

Crimp Die for Stamped & Formed Contact

MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 100

Shell Size: 18    Number of Contacts: 8    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

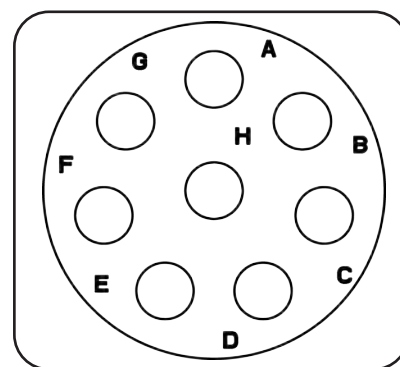

Insert Arrangement  
Pin (Male) Faceview

Connector Part Numbers

| Part Number  |              | Connector Type   | Figure Drawings |        |
|--------------|--------------|--|-----------------|--------|
| Male         | Female       |  | Male            | Female |
| RT07188PNH   | RT07188SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT07188PNHEC | RT07188SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT06188PNH   | RT06188SNH   | Plug   | 6               | 7      |
| RT06188PNHEC | RT06188SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00188PNH   | RT00188SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT00188PNHEC | RT00188SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 100  
\*\*See page 97 for the real seal wire range

Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-18CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RT0S-18CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RT0L-18CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RT0L-18CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 18      Number of Contacts: 8  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 2.5mm

## Dimensions Jam Nut Receptacle

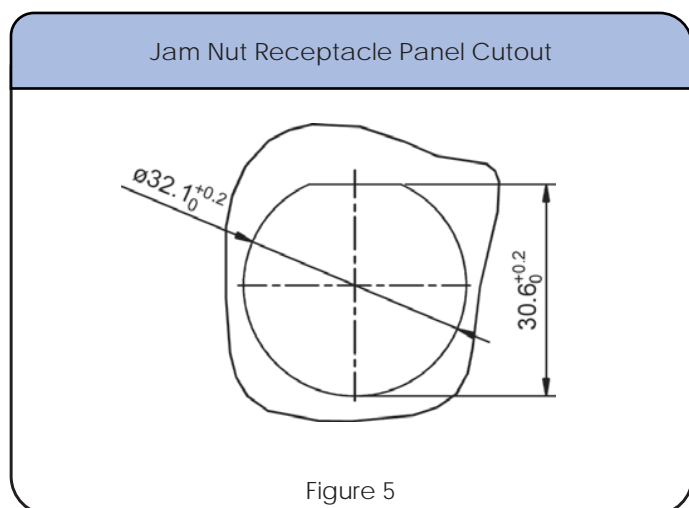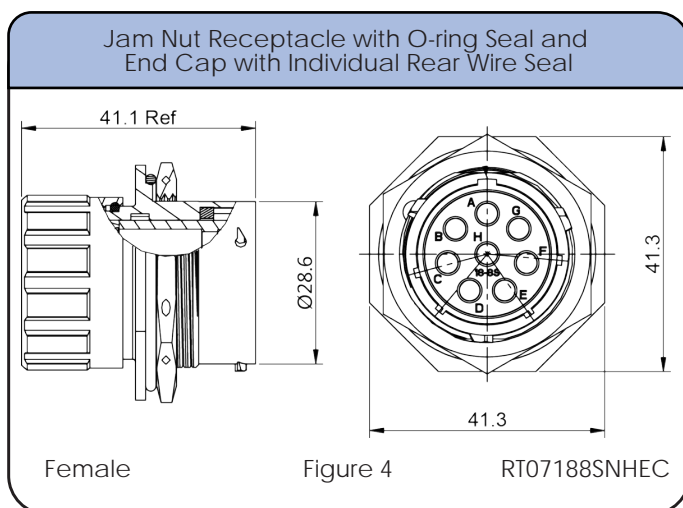
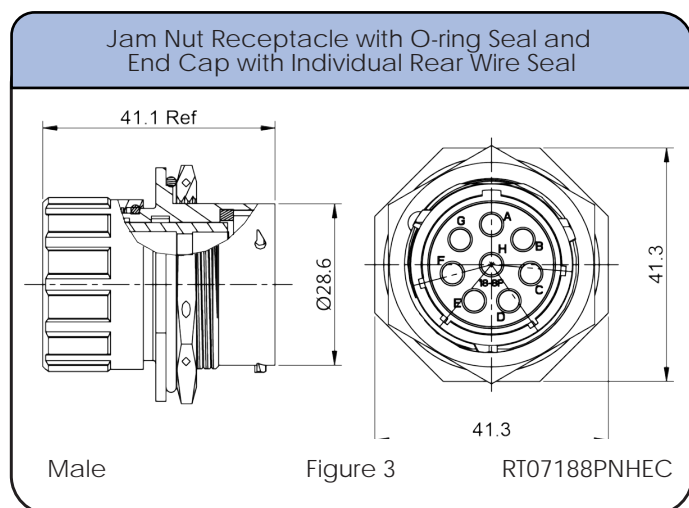
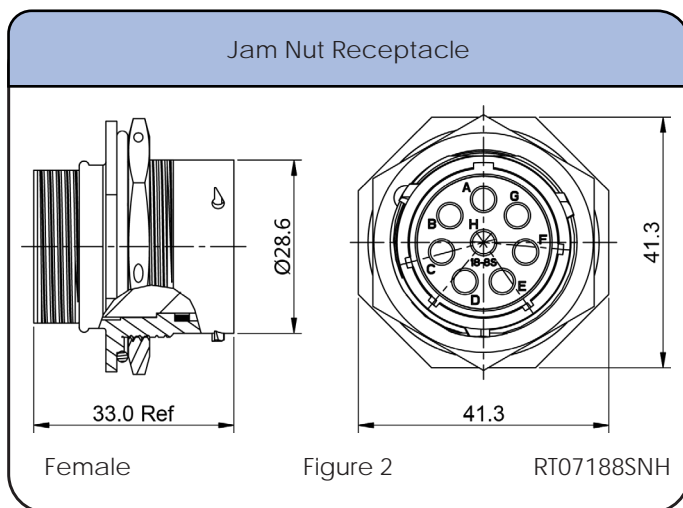
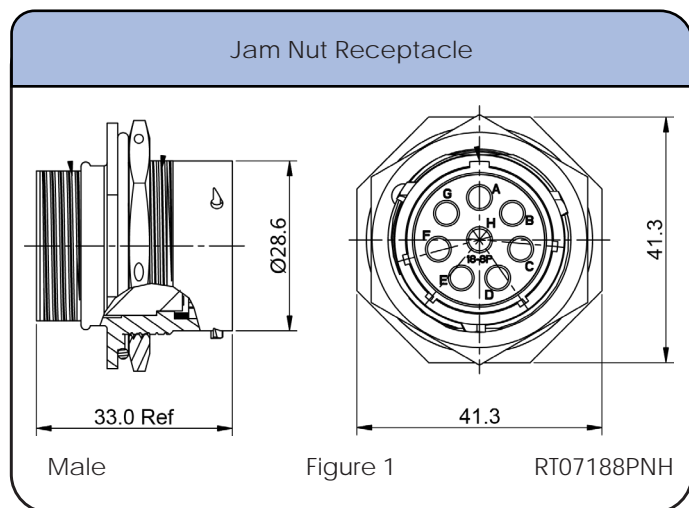




Shell Size: 18      Number of Contacts: 8  
Sealing: IP67      Salt Spray: 48h

Contact Size: 2.5mm

### Dimensions Plug


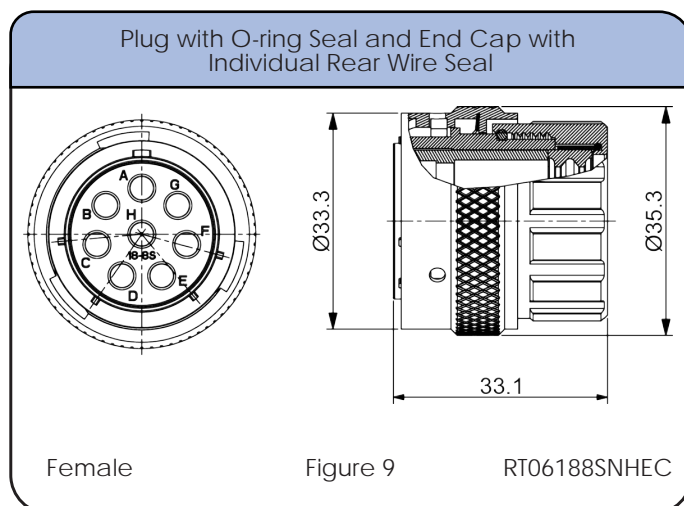
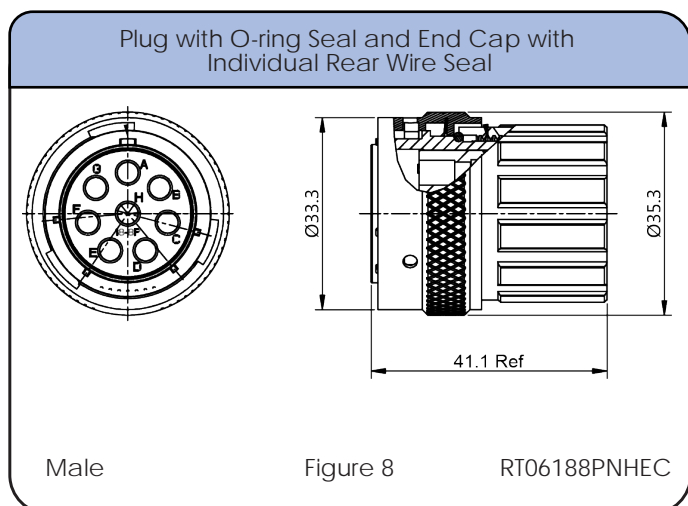
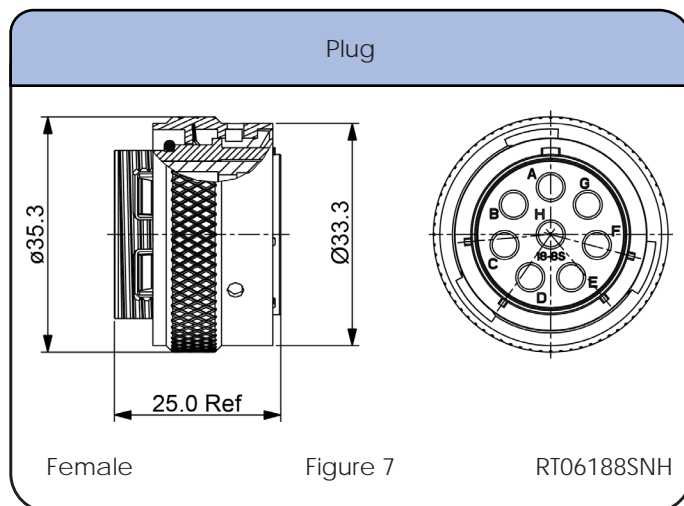
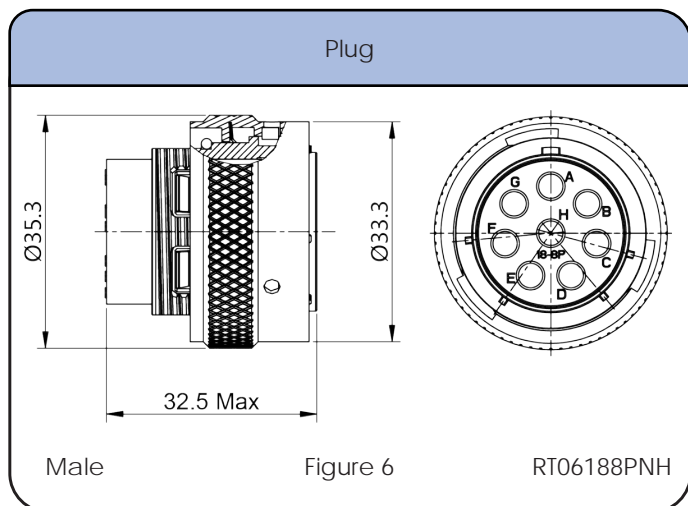


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 2.5mm        | Ø3.3mm - Ø4.3mm                       | 14 - 12 AWG |



Shell Size: 18    Number of Contacts: 8    Contact Size: 2.5mm  
 Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

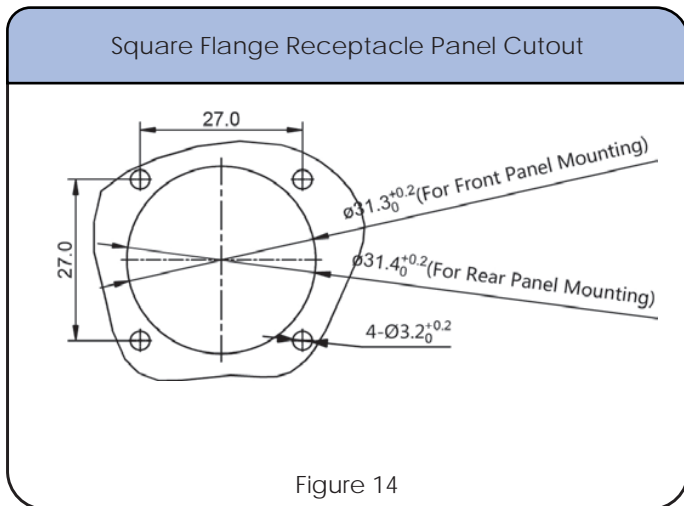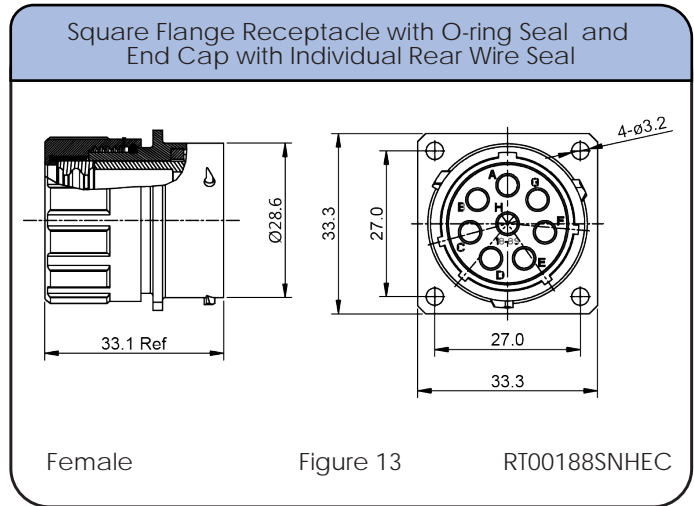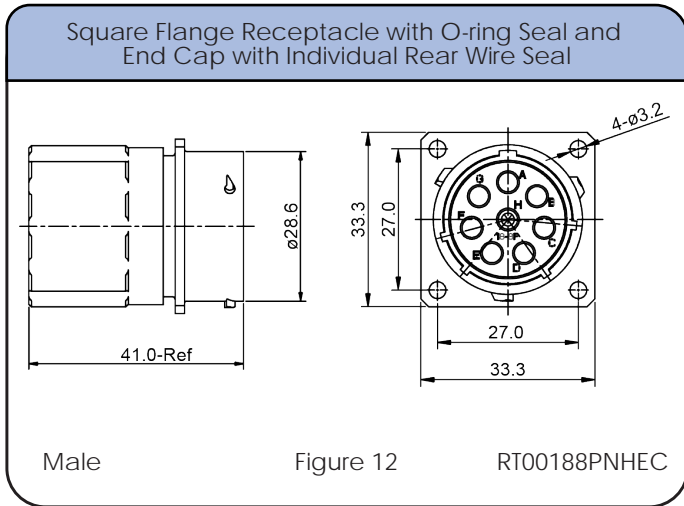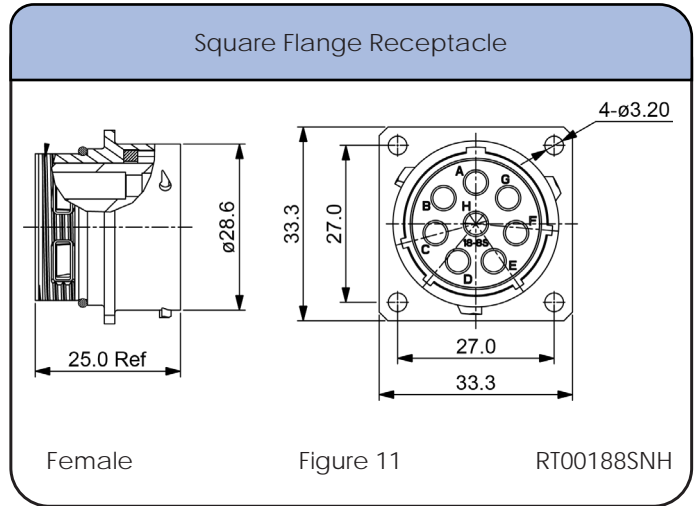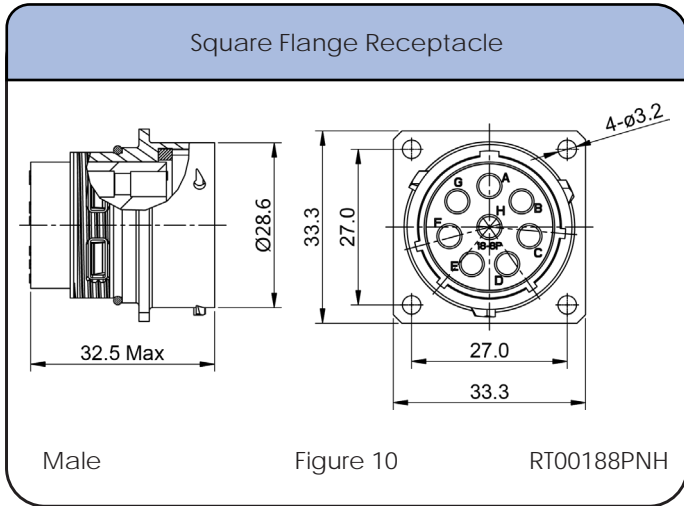

Shell Size: 18    Number of Contacts: 8    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

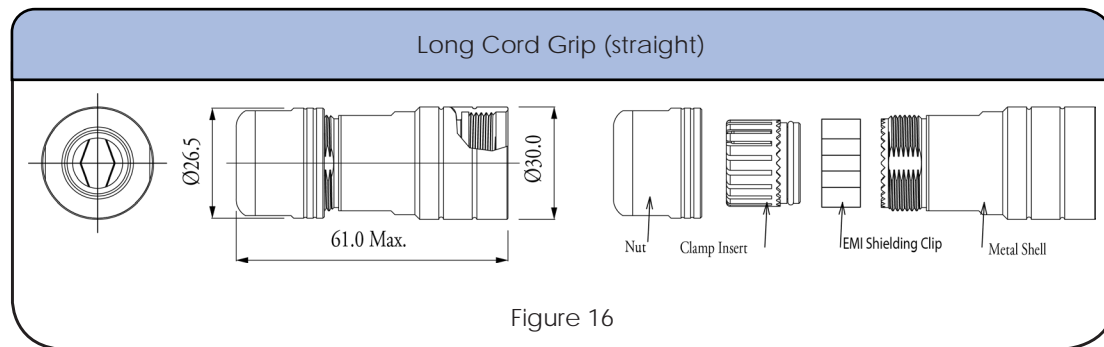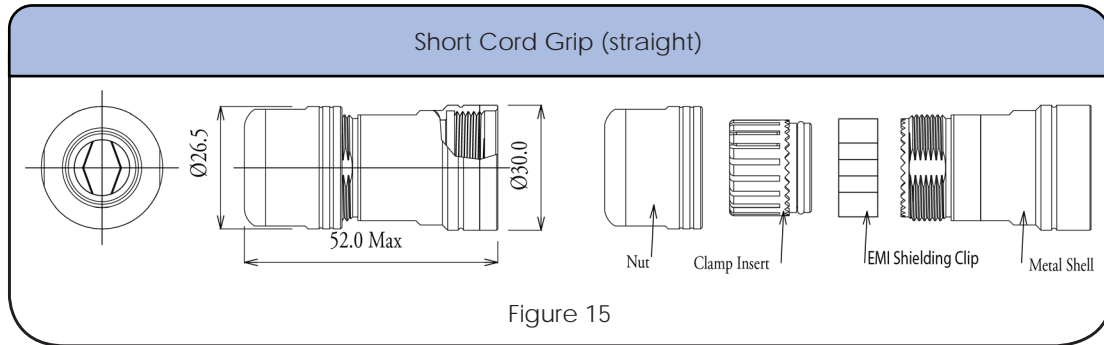

Shell Size: 18  
Sealing: IP67

Number of Contacts: 8  
Salt Spray: 48h

Contact Size: 2.5mm

## Contacts



### Crimp Contacts, Stamped & Formed

| Part Number |         | AWG   | Wire Range (mm <sup>2</sup> ) | Plating |
|-------------|---------|-------|-------------------------------|---------|
| Male        | Female  |       |                               |         |
| SP12A1T     | SS12A1T | 14-12 | 2.5-3.5                       | Tin     |

no machined contacts are available for this group

## Tools



Shell Size: 18    Number of Contacts: 8    Contact Size: 2.5mm  
Sealing: IP67    Salt Spray: 48h

## Accessories

|   |  |  |
|---|--|--|
| <p>Plug Dustcap with Chain</p>  <p>RT618DCG</p>                            | <p>Plug Dustcap without Chain</p>  <p>RT618DC</p>                                 | <p>Receptacle Dustcap with Chain</p>  <p>RT018DCG</p>                             |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p>  <p>RT018RL</p> | <p>Receptacle Dustcap without Chain</p>  <p>RT018DC</p>                          | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p>  <p>RB00011918</p> |
| <p>Sealing Plug</p>  <p>A114017</p>                                      | <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p>  <p>RTFD18B</p> | <p>Locking Clip with Lanyard</p>  <p>108039118</p>                              |

NEW!  
See Page 16

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Plug



Backshell



SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 108




Shell Size: 16    Number of Contacts: 9    Contact Size: Mixed 2.5mm & 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

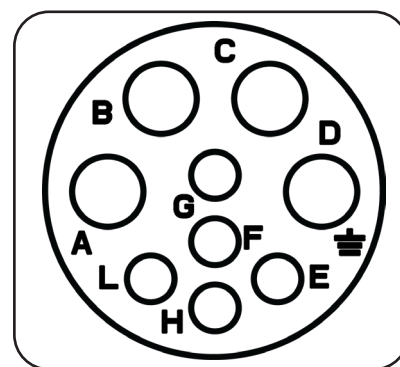

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RT071609PNH   | RT071609SNH   | Jam Nut Receptacle with O-ring Seal  | 1,5             | 2,5    |
| RT07169PNHEC  | RT07169SNHEC  | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT061609PNH   | RT061609SNH   | Plug with O-ring Seal  | 6               | 7      |
| RT061609PNHEC | RT061609SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT00169PNH    | RT00169SNH    | Square Flange Receptacle with O-ring Seal  | 10,14           | 11,14  |
| RT00169PNHEC  | RT00169SNHEC  | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |

Contacts supplied separately see page 108  
\*\*See page 105 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-16CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RTOS-16CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RTOL-16CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RTOL-16CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |
| RTOB-16CG-S1 | Cord Grip (90°)            | 9.5-14.5         | 17              | ✓         |
| RTOB-16CG-S2 | Cord Grip (90°)            | 13.5-17.0        | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 16      Number of Contacts: 9  
 Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16





## Dimensions Jam Nut Receptacle

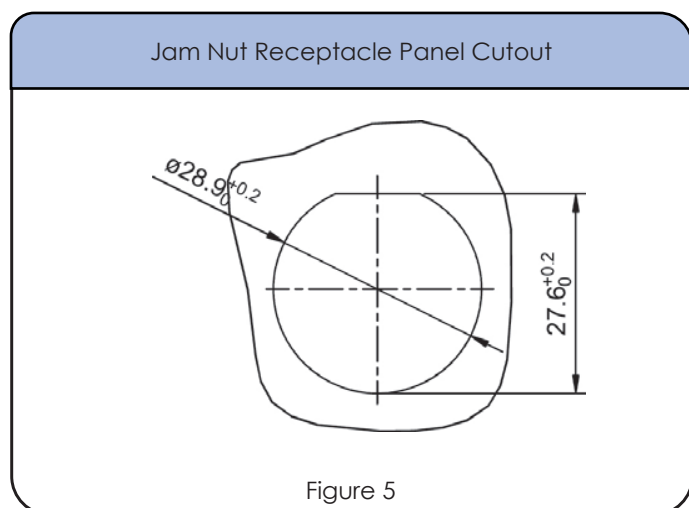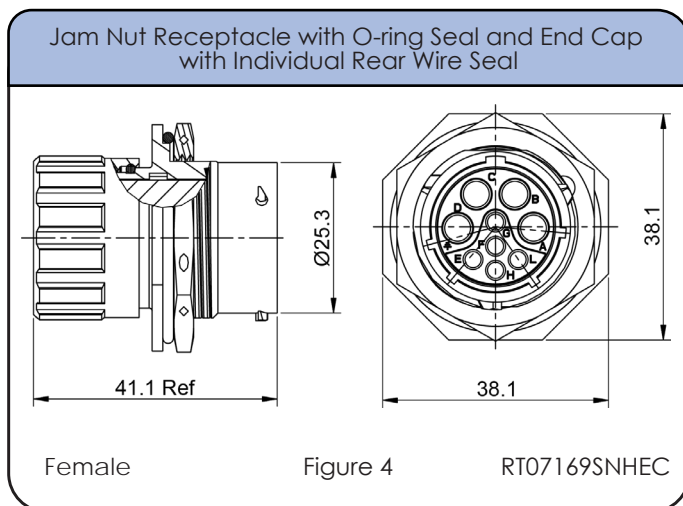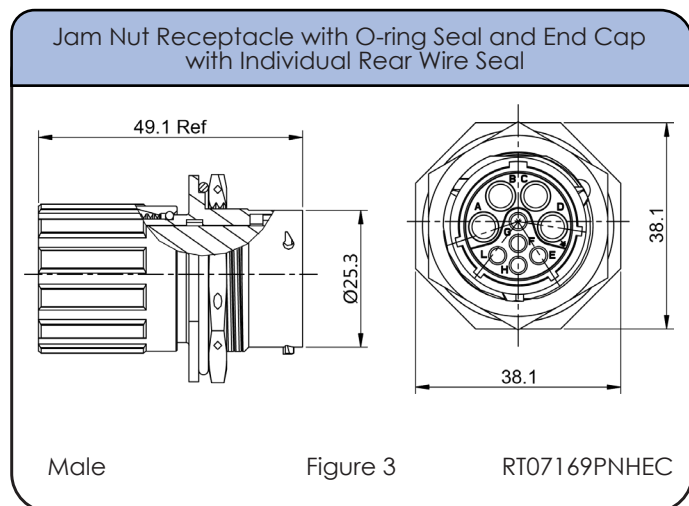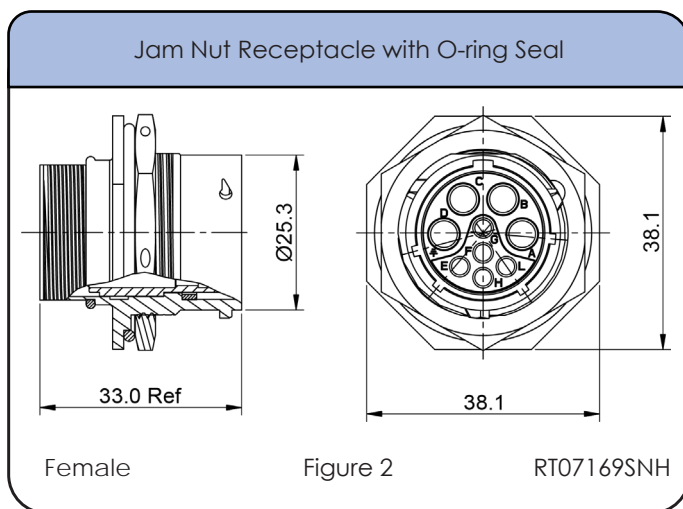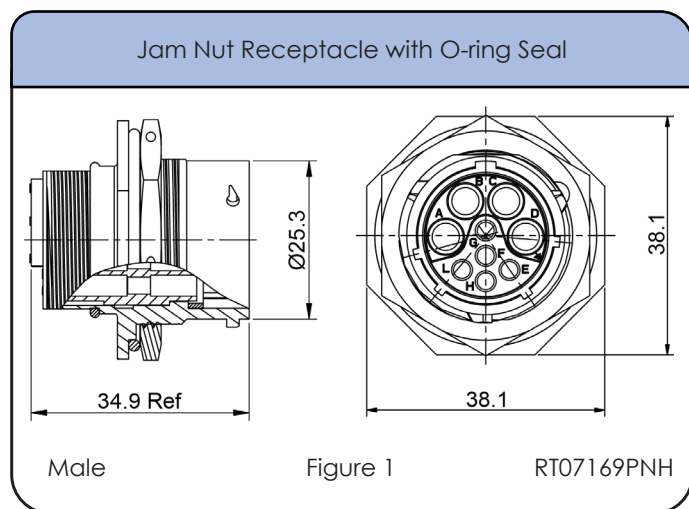

Shell Size: 16      Number of Contacts: 9  
Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Dimensions Plug


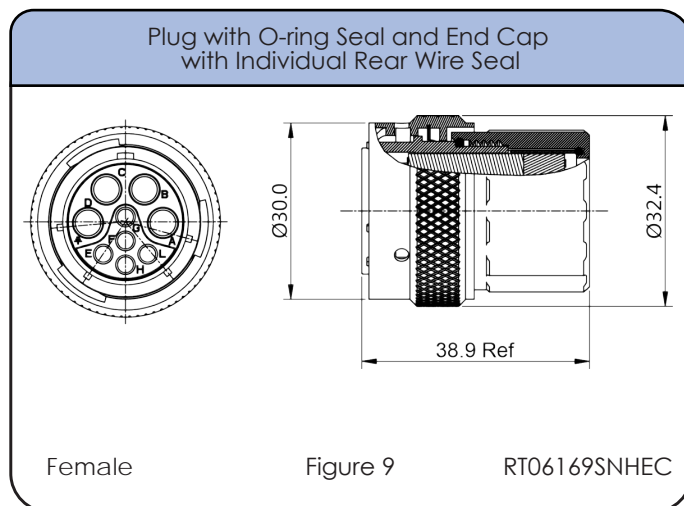
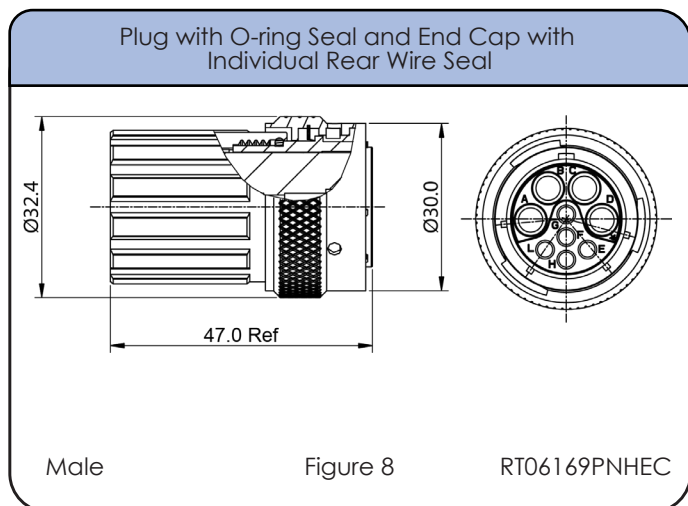
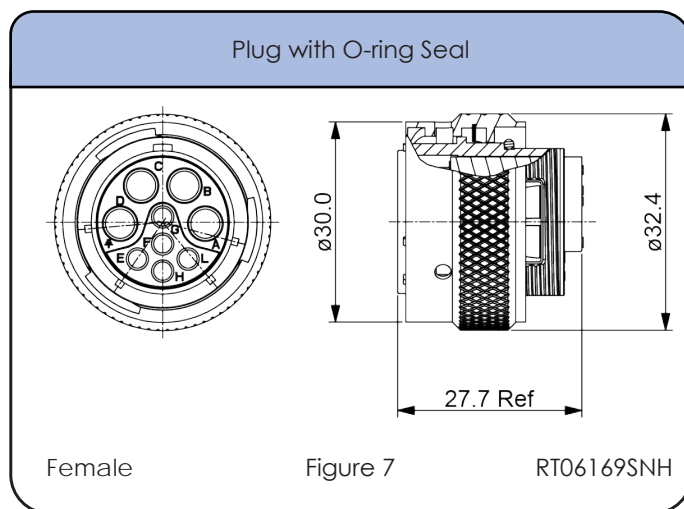
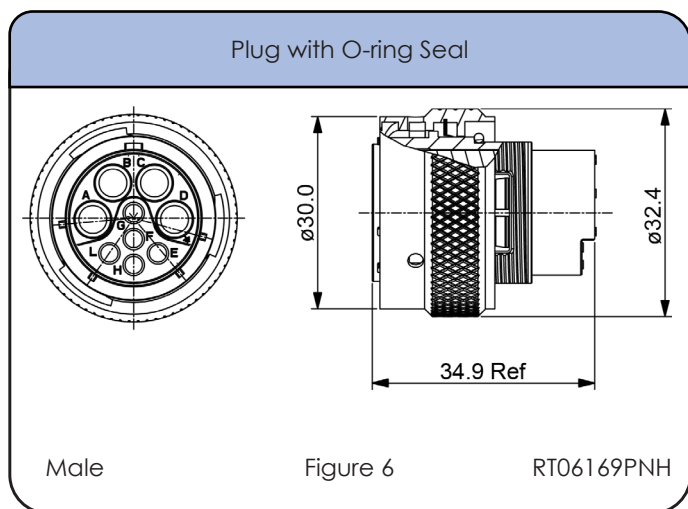


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 2.5mm        | Ø3.3mm - Ø4.3mm                       | 14 - 12 AWG |
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 16    Number of Contacts: 9    Contact Size: Mixed 2.5mm & 16  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

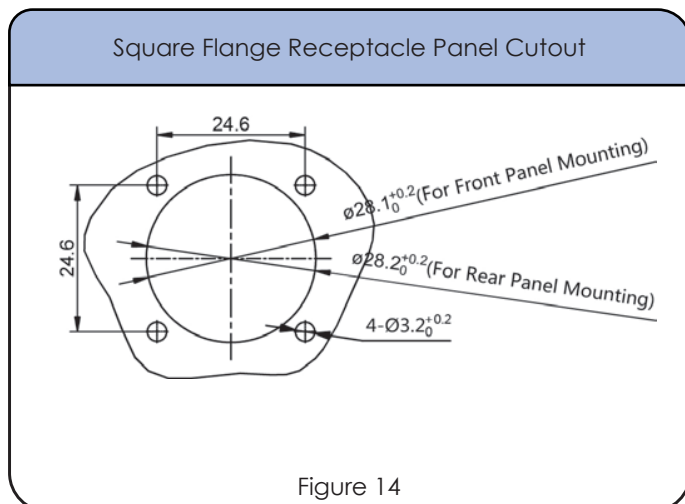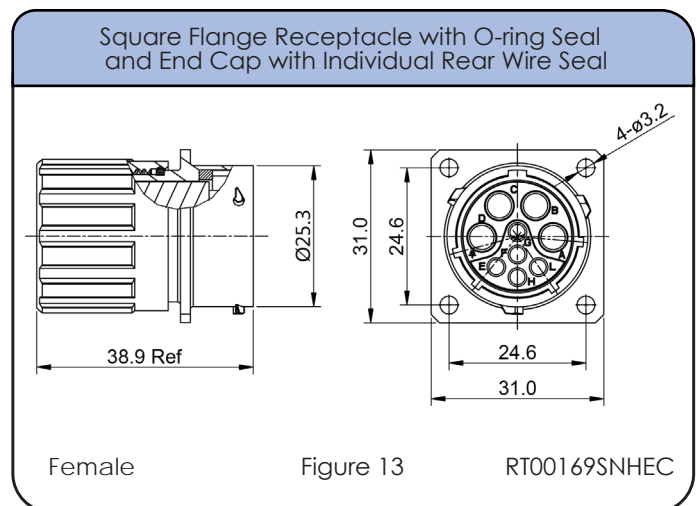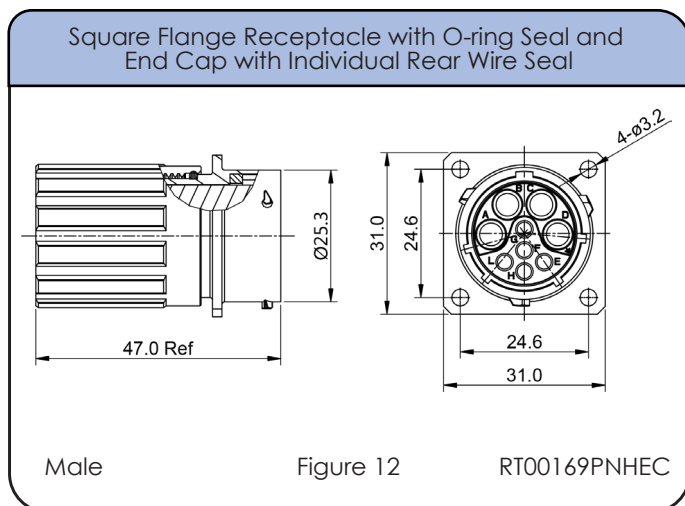
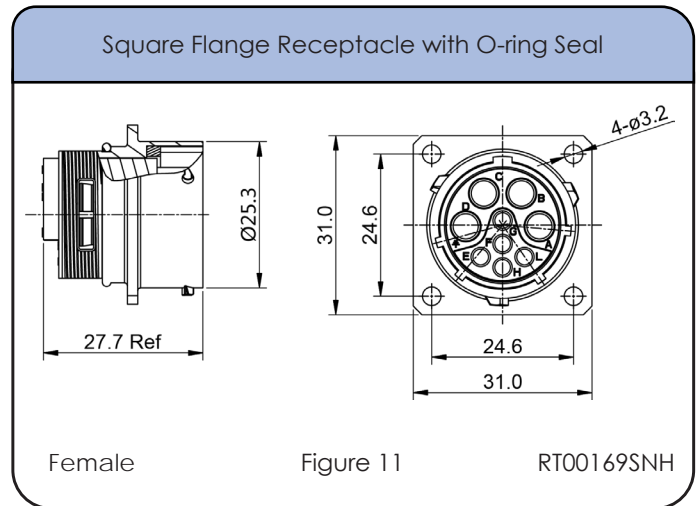
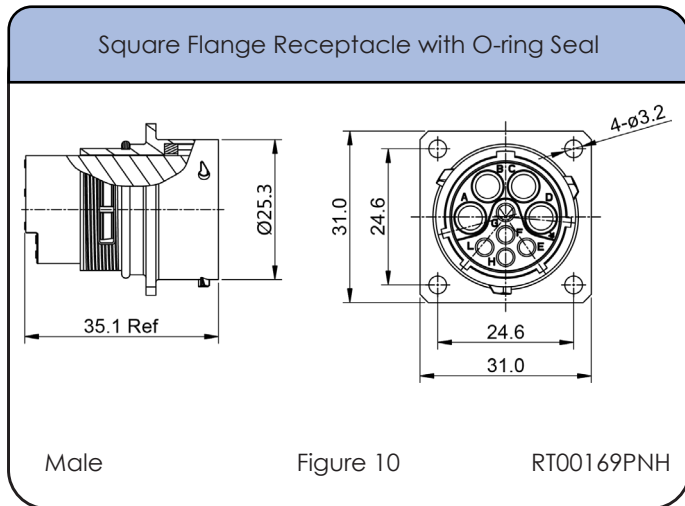


Shell Size: 16  
Sealing: IP67



Number of Contacts: 9  
Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Dimensions Backshell

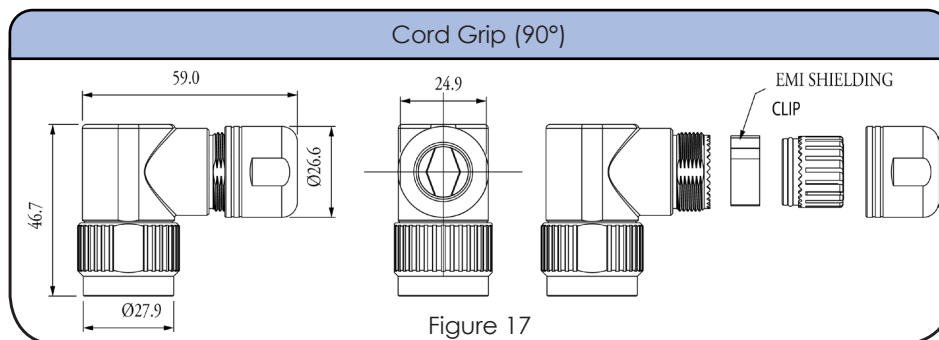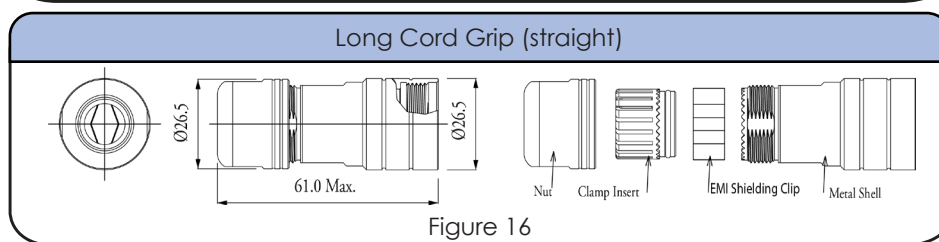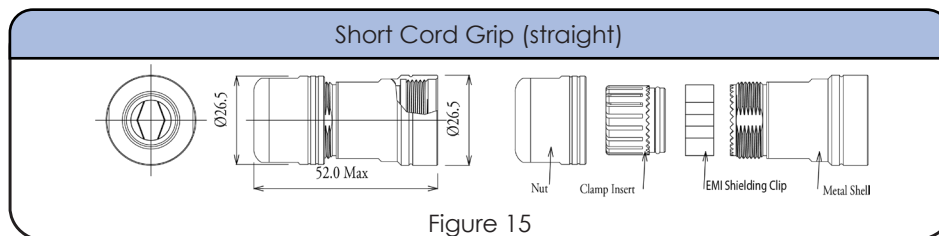

## Accessories



NEW!  
See  
Page  
16

Shell Size: 16  
Sealing: IP67

Number of Contacts: 9  
Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16


## Contacts



## Crimp Contacts, Machined

| Part Number |            | Contact Size | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|--------------|-------|-------------------------------|------------|
| Male        | Female     |              |       |                               |            |
| MP14M23F    | MS14M23F   | 16           | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 16           | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 16           | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 16           | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 16           | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 16           | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 16           | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 16           | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 16           | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 16           | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 16           | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 16           | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 16           | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 16           | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 16           | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 16           | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 16           | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 16           | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 16           | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 16           | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools





Shell Size: 16      Number of Contacts: 9  
Sealing: IP67      Salt Spray: 48h

Contact Size: Mixed 2.5mm & 16

## Contacts (con't)




## Crimp Contacts, Stamped & Formed

| Part Number |           | Contact Size | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|--------------|-------|-------------------------------|------------|
| Male        | Female    |              |       |                               |            |
| SP12A1T     | SS12A1T   | 2.5mm        | 14-12 | 2.0-2.5                       | Tin        |
| SP14M2F     | SS14M2F   | 16           | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 16           | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 16           | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 16           | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 16           | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 16           | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 16           | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 16           | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 16           | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 16           | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 16           | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 16           | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 16           | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 16           | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 16           | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 16           | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 16           | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 16           | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 16           | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 16           | 26-24 | .14-.25                       | Gold 30μ"  |


## Tools

Extraction Tool 2.5mm Contact




QXRT12S

Contact Extraction Tool, #16 (Ø 1.6) Contact




QXRT16

Crimp Die for Stamped & Formed Contact




MFX-3957

Hand Tool, Stamped & Formed Contact, 2.5 mm



MFX-3962

Hand Tool, Stamped & Formed Contact, Size 16, 20-14AWG



MFX-3954

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

**Jam Nut Receptacles**



**OR**  
**Square Flange Receptacles**



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



**Plug**



**Backshell**



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 116

Shell Size: 12    Number of Contacts: 10    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

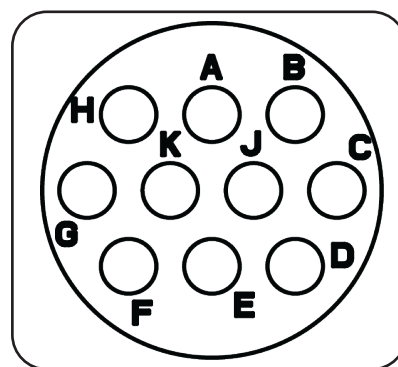

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number    |                | Connector Type   | Figure Drawings |        |
|----------------|----------------|--|-----------------|--------|
| Male           | Female         |  | Male            | Female |
| RT0W71210PNH   | RT0W71210SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT0W71210PNHEC | RT0W71210SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT0W71210PNH-K | RT0W71210SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT0W61210PNH   | RT0W61210SNH   | Plug   | 6               | 7      |
| RT0W61210PNHEC | RT0W61210SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT0W61210PNH-K | RT0W61210SNH-K | Plug Kit   | 6               | 7      |
| RT0W01210PNH   | RT0W01210SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT0W01210PNHEC | RT0W01210SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT0W01210PNH-K | RT0W01210SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 116  
\*\*See page 113 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-12CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RT0S-12CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RT0L-12CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RT0L-12CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RT0B-12CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RT0B-12CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 12      Number of Contacts: 10  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 20





### Dimensions Jam Nut Receptacle

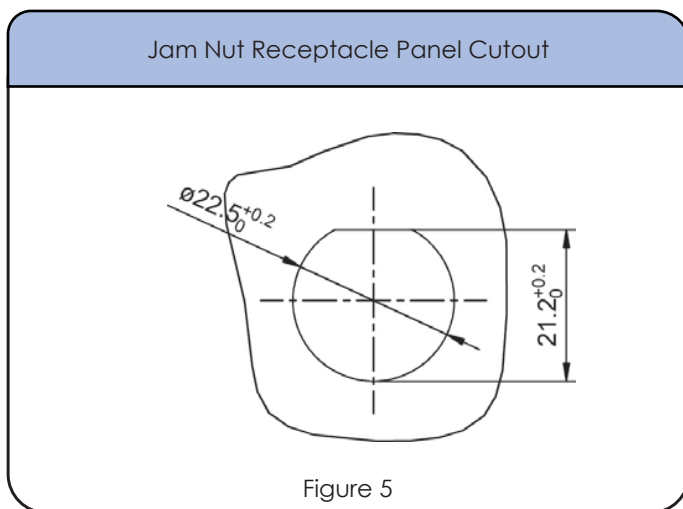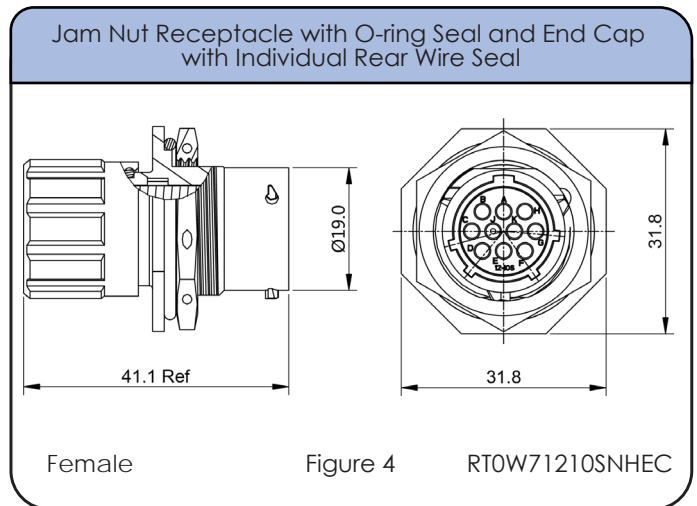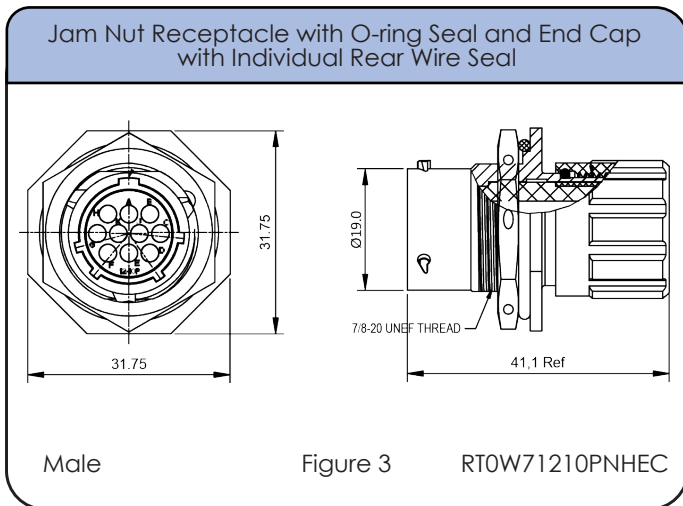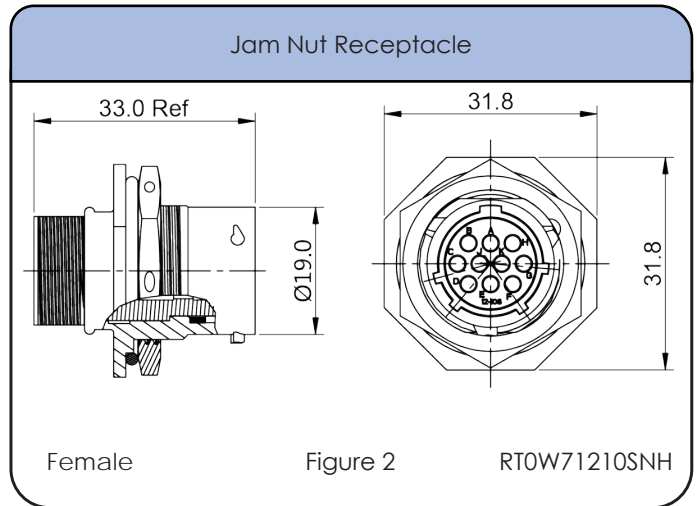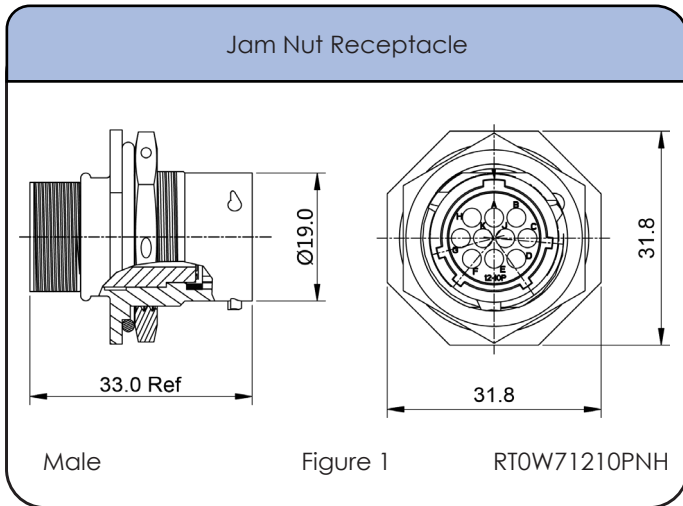

Shell Size: 12      Number of Contacts: 10  
Sealing: IP67      Salt Spray: 48h

Contact Size: 20

### Dimensions Plug


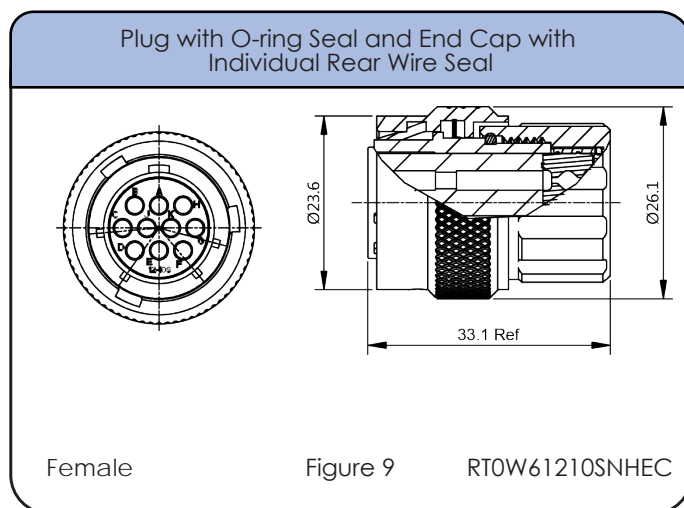
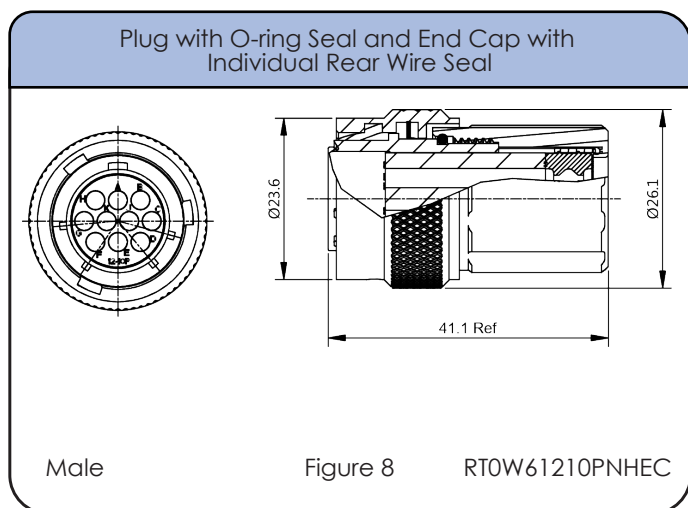
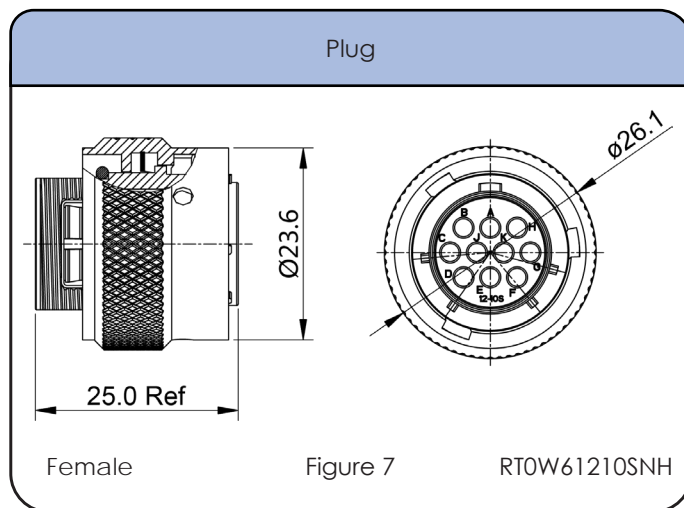
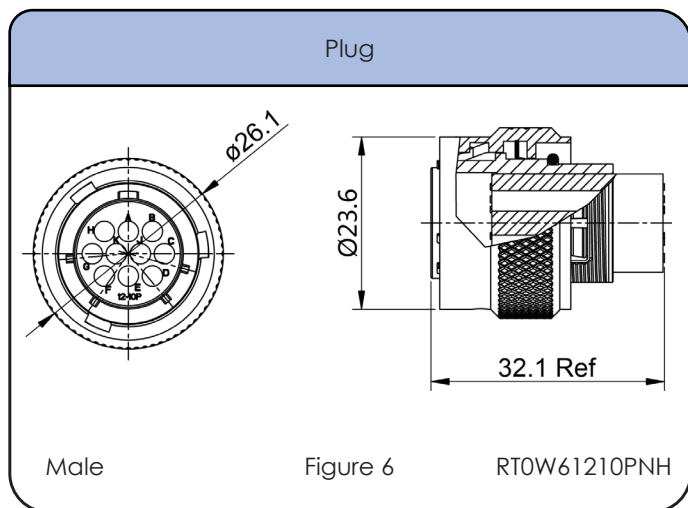


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 20           | Ø1.6mm - Ø2.6mm                       | 20 - 30 AWG |

Shell Size: 12    Number of Contacts: 10    Contact Size: 20  
 Sealing: IP67    Salt Spray: 48h




## Dimensions Square Flange Receptacle

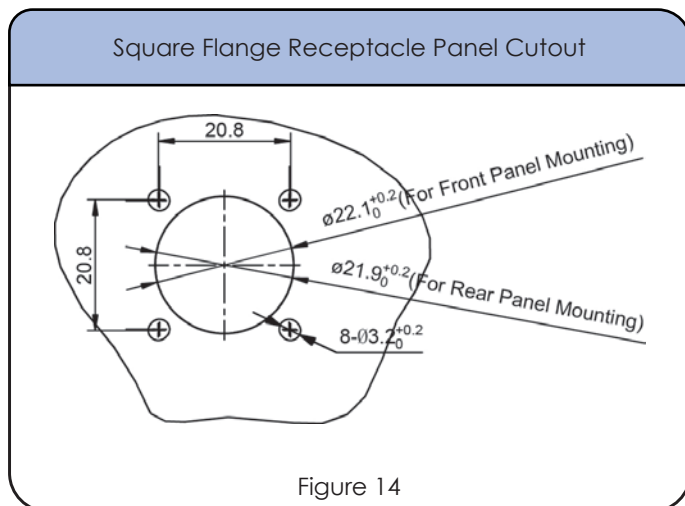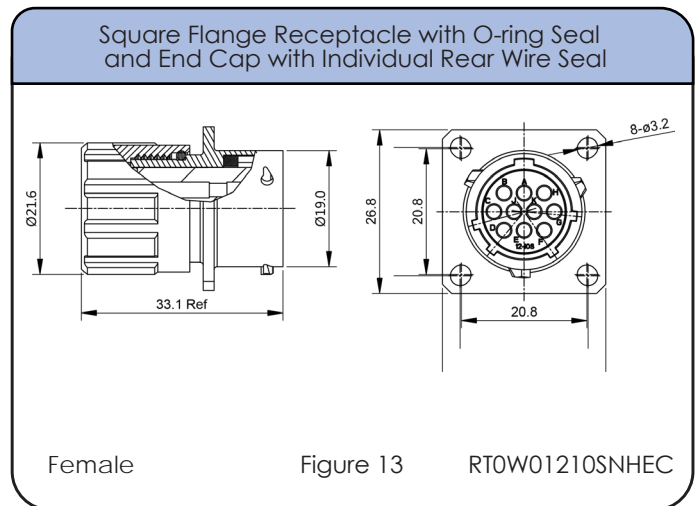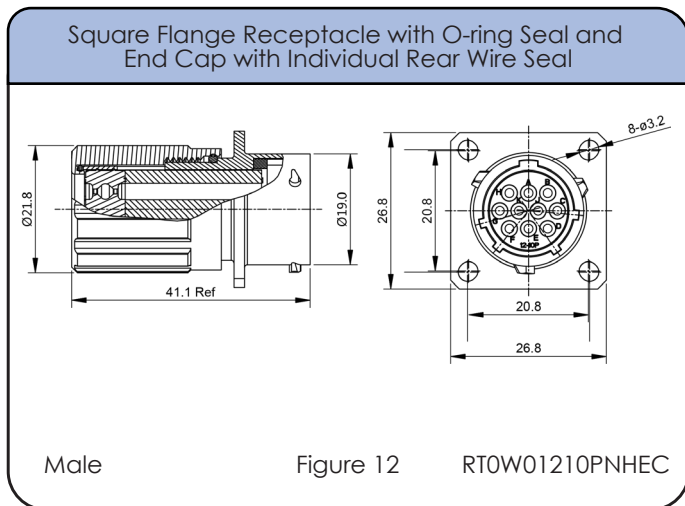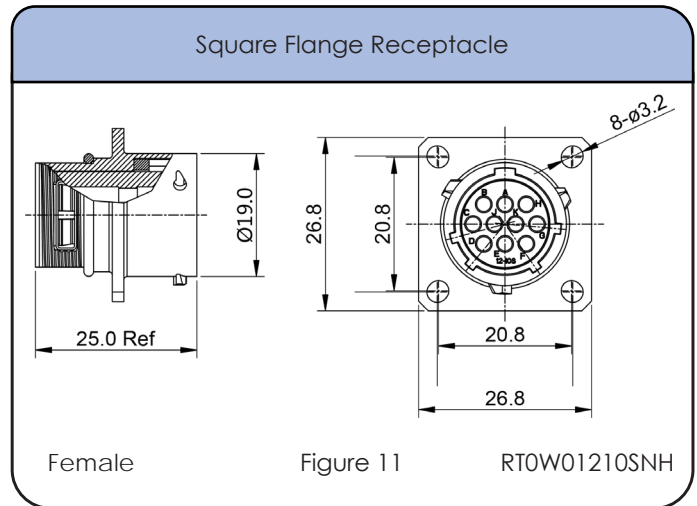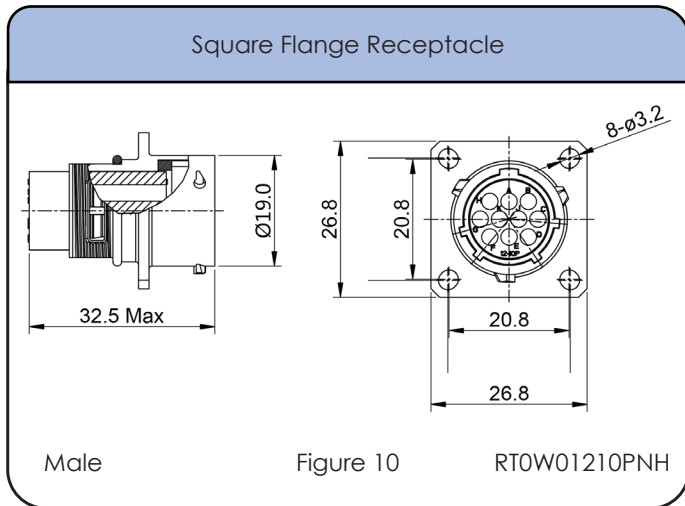







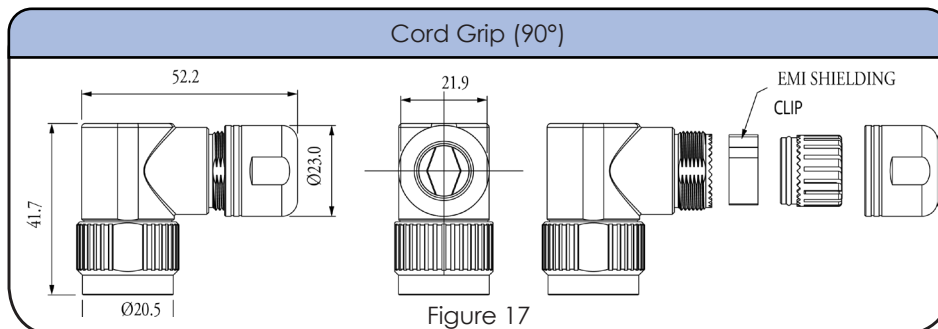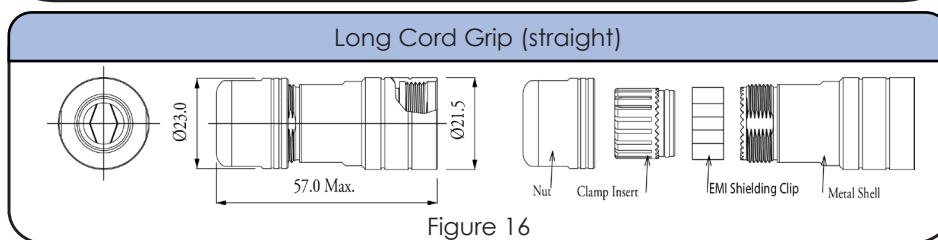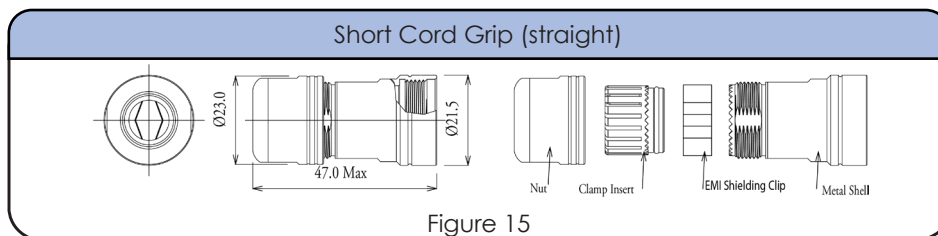




Shell Size: 12      Number of Contacts: 10      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h

## Dimensions Backshell



## Accessories

|  |  |  |  |
|--|--|--|--|
| <p>Locking Clip with Lanyard</p>  <p>NEW!<br/>See Page 16</p> <p>108039112</p>  | <p>Plug Dustcap with Chain</p>  <p>RT612DCG</p>         | <p>Plug Dustcap without Chain</p>  <p>RT612DC</p>                                | <p>Receptacle Dustcap with Chain</p>  <p>RT012DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p>  <p>RT012RL</p>       | <p>Receptacle Dustcap without Chain</p>  <p>RT012DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p>  <p>RB00011912</p> | <p>Sealing Plug</p>  <p>AT13-204-2005</p>             |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p>  <p>RTFD12B</p> |  |  |  |

Shell Size: 12  
Sealing: IP67

Number of Contacts: 10  
Salt Spray: 48h

Contact Size: 20

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range<br>(mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|----------------------------------|------------|
| Male        | Female     |       |                                  |            |
| MP20W23F    | MS20W23F   | 22-20 | .34-.50                          | Gold Flash |
| MP20W23G5   | MS20W23G5  | 22-20 | .34-.50                          | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 22-20 | .34-.50                          | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 22-20 | .34-.50                          | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 22-20 | .34-.50                          | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 26-24 | .13-.25                          | Gold Flash |
| MP24W23G5   | MS24W23G5  | 26-24 | .13-.25                          | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 26-24 | .13-.25                          | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 26-24 | .13-.25                          | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 26-24 | .13-.25                          | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 30-28 | .05-.08                          | Gold Flash |
| MP28W23G5   | MS28W23G5  | 30-28 | .05-.08                          | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 30-28 | .05-.08                          | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 30-28 | .05-.08                          | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 30-28 | .05-.08                          | Gold 30μ"  |

## Tools



Shell Size: 12      Number of Contacts: 10      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h


### Contacts (con't)



### Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP20W2F     | SS20W2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20W2G5    | SS20W2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20W2G10   | SS20W2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24W2F     | SS24W2F   | 26-24 | .14-.25                       | Gold Flash |
| SP24W2G5    | SS24W2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 26-24 | .14-.25                       | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 30-28 | .05-.08                       | Gold Flash |
| SP28W2G5    | SS28W2G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 30-28 | .05-.08                       | Gold 30μ"  |

### Tools

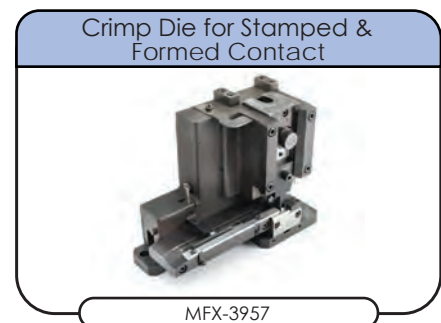

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 124

Shell Size: 14    Number of Contacts: 12    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

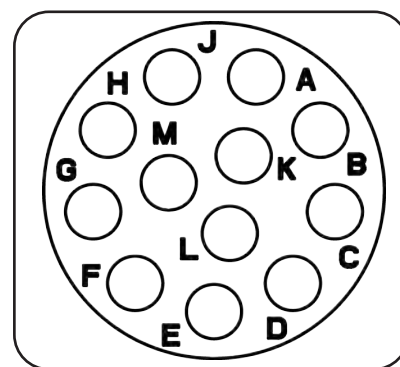

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RT071412PNH   | RT071412SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT071412PNHEC | RT071412SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT071412PNH-K | RT071412SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT061412PNH   | RT061412SNH   | Plug   | 6               | 7      |
| RT061412PNHEC | RT061412SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT061412PNH-K | RT061412SNH-K | Plug Kit   | 6               | 7      |
| RT001412PNH   | RT001412SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT001412PNHEC | RT001412SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT001412PNH-K | RT001412SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 124

\*\*See page 121 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-14CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RTOS-14CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RTOL-14CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RTOL-14CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RTOB-14CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RTOB-14CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 14      Number of Contacts: 12  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 16

## Dimensions Jam Nut Receptacle

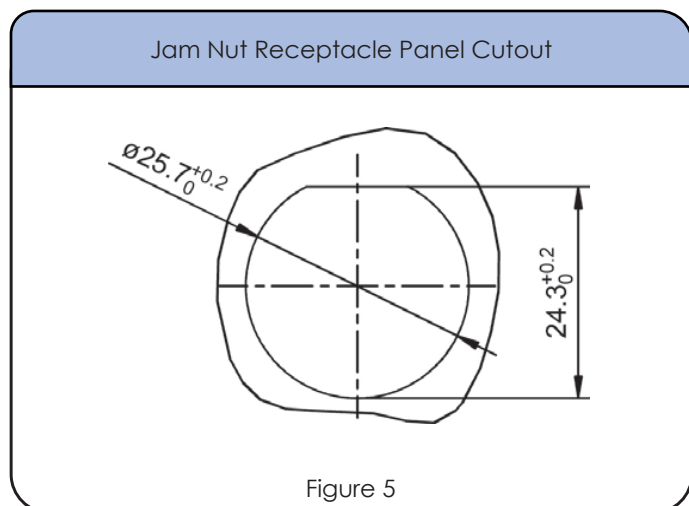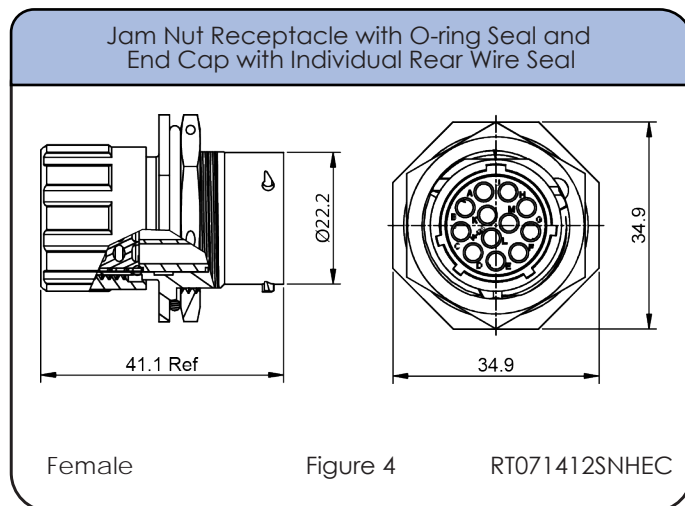
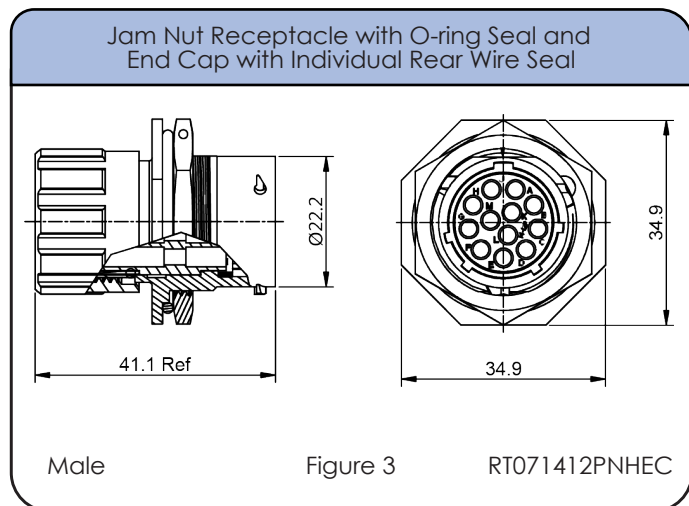
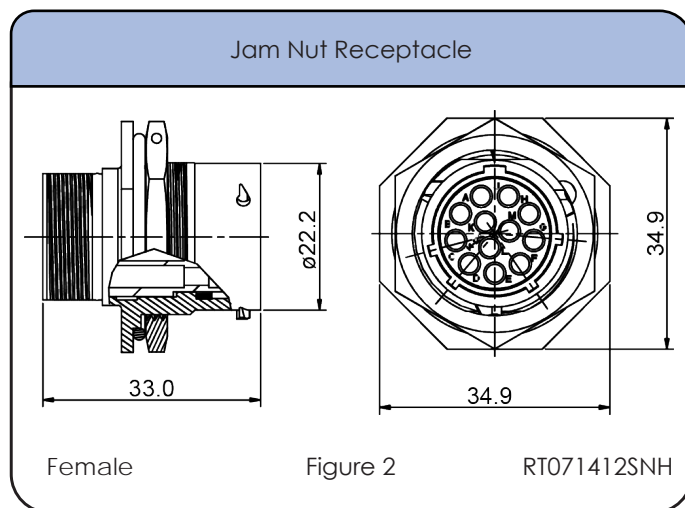
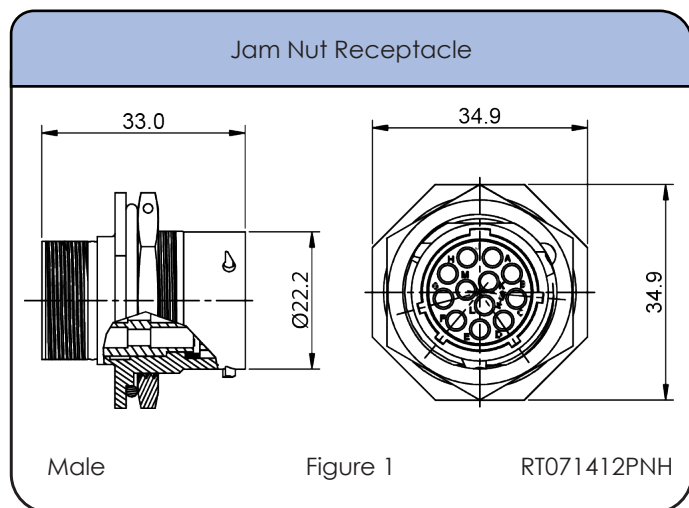




Shell Size: 14      Number of Contacts: 12  
Sealing: IP67      Salt Spray: 48h

Contact Size: 16

### Dimensions Plug


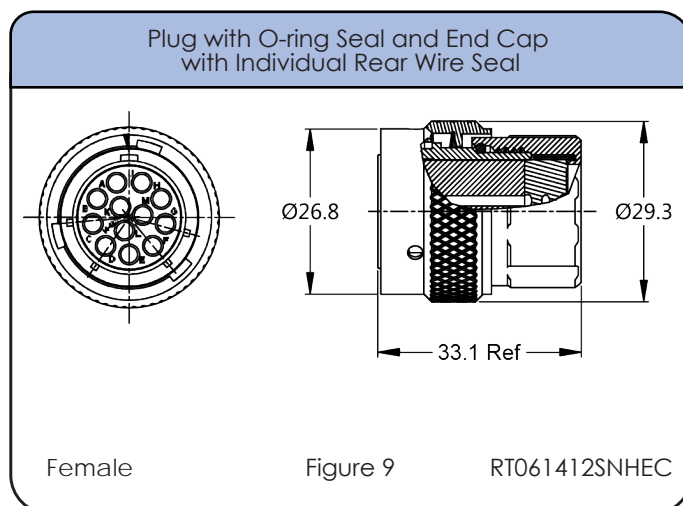
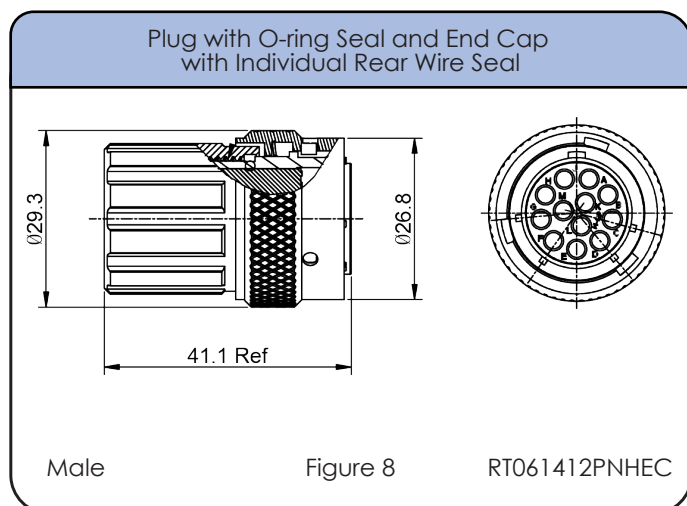
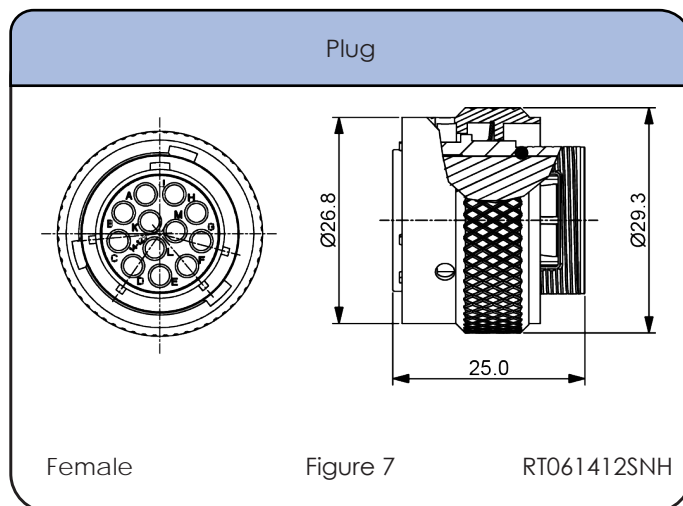
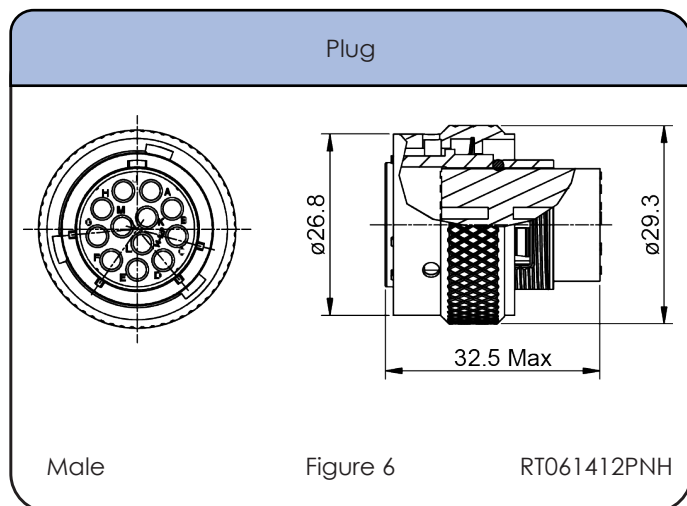


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 14    Number of Contacts: 12    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

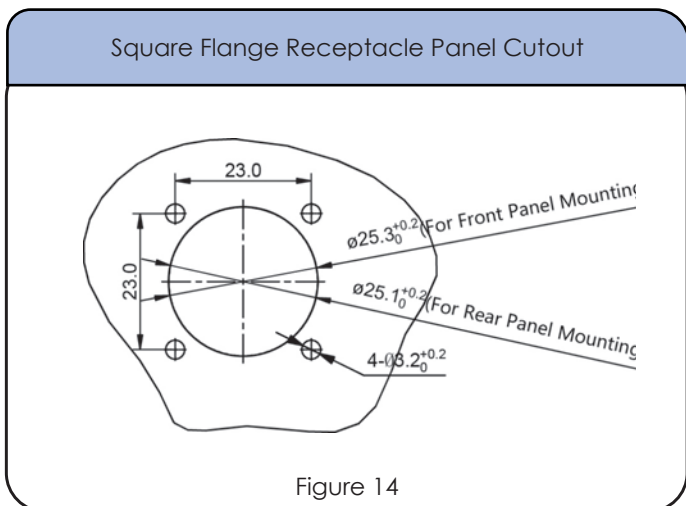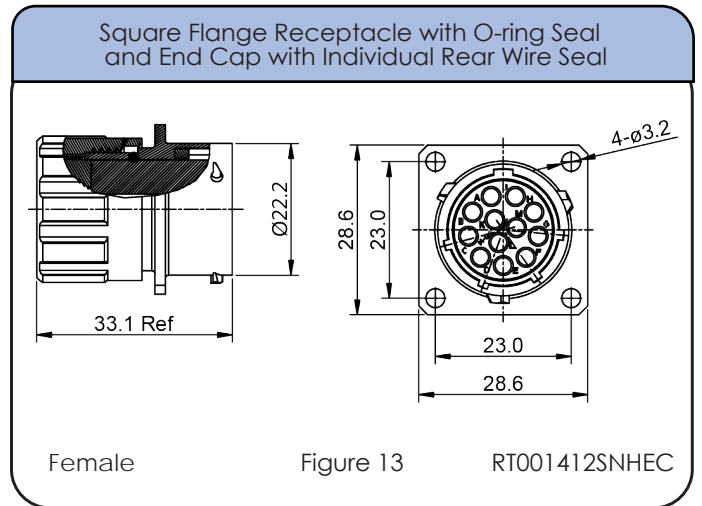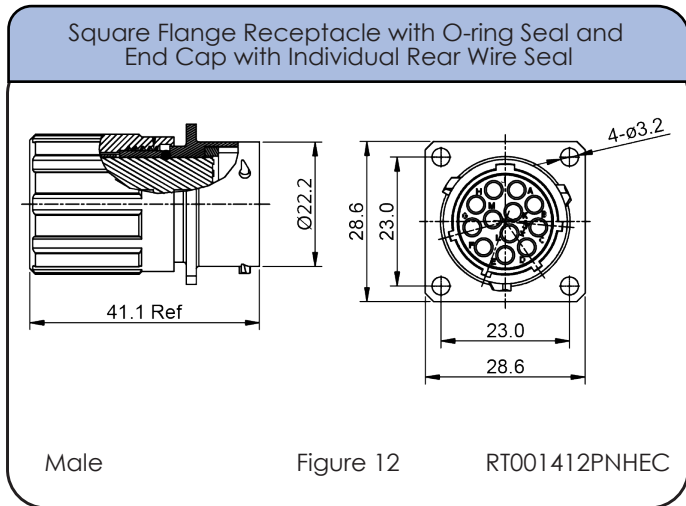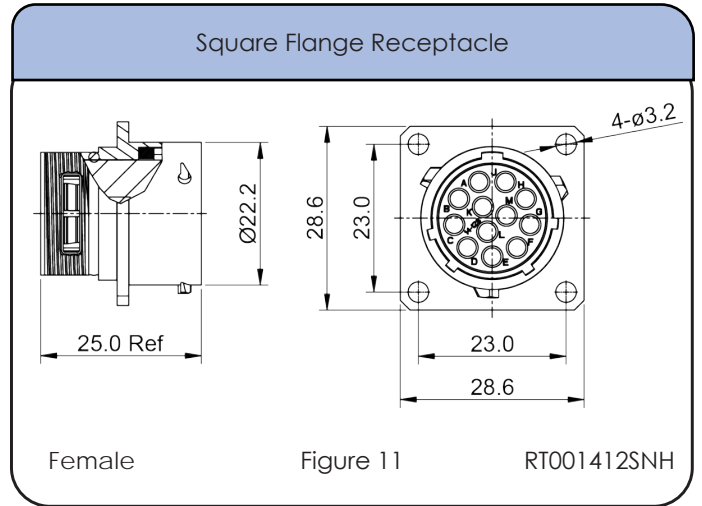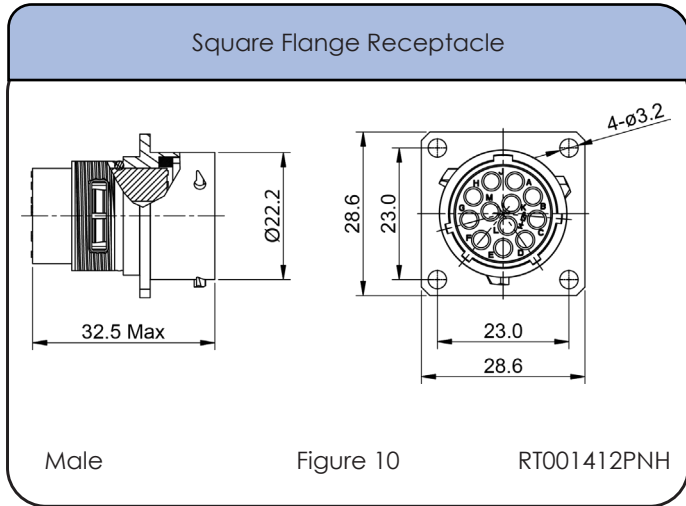

Shell Size: 14      Number of Contacts: 12      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

## Dimensions Backshell

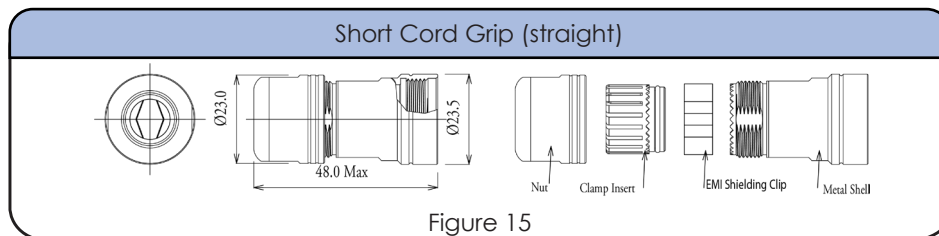


Figure 15

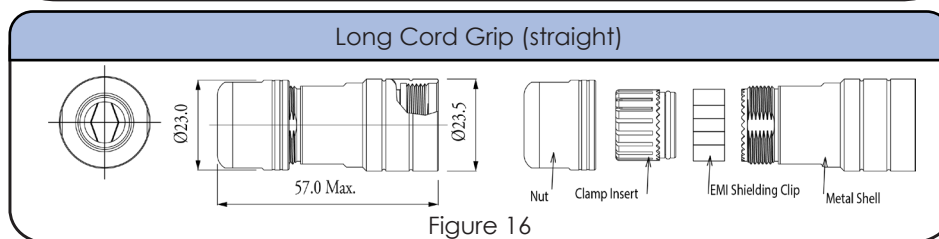


Figure 16

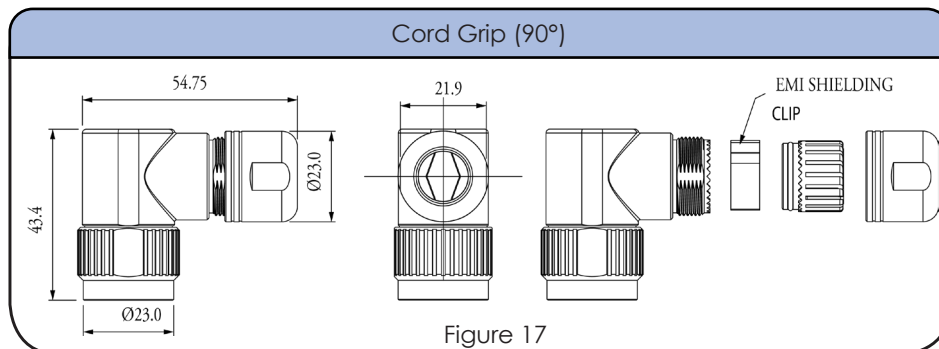


Figure 17

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039114</p>                              | <p>Plug Dustcap with Chain</p> <p>RT614DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT614DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT014DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT014RL</p>       | <p>Receptacle Dustcap without Chain</p> <p>RT014DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011914</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD14B</p> |  |   |  |

**NEW!**  
See  
Page  
16

Shell Size: 14  
Sealing: IP67

Number of Contacts: 12  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Crimp Tool for  
Machined Contacts



MFX-3959

Pneumatic Crimp Tool for  
Machined Contacts



MFX-3960

Shell Size: 14      Number of Contacts: 12      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Contacts (con't)



Stamped & Formed Contacts

### Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

### Tools



Contact Extraction Tool, #16 (Ø 1.6) Contact

QXRT16



Hand Tool, Stamped & Formed Contact, Size 16, 20-14AWG

MFX-3954



Crimp Die for Stamped & Formed Contact

MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 132




Shell Size: 14    Number of Contacts: 19    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

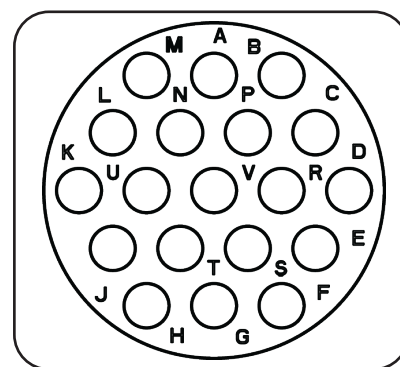

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number    |                | Connector Type   | Figure Drawings |        |
|----------------|----------------|--|-----------------|--------|
| Male           | Female         |  | Male            | Female |
| RTOW71419PNH   | RTOW71419SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RTOW71419PNHEC | RTOW71419SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RTOW71419PNH-K | RTOW71419SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RTOW61419PNH   | RTOW61419SNH   | Plug   | 6               | 7      |
| RTOW61419PNHEC | RTOW61419SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RTOW61419PNH-K | RTOW61419SNH-K | Plug Kit   | 1,5             | 2,5    |
| RTOW01419PNH   | RTOW01419SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RTOW01419PNHEC | RTOW01419SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RTOW01419PNH-K | RTOW01419SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 132

\*\*See page 129 for the real seal wire range

## Backshells






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-14CG-S1 | Short Cord Grip (straight) | 6-10.5           | 15              | ✓         |
| RTOS-14CG-S2 | Short Cord Grip (straight) | 8.5-12.5         | 15              | ✓         |
| RTOL-14CG-S1 | Long Cord Grip (straight)  | 6-10.5           | 16              | ✓         |
| RTOL-14CG-S2 | Long Cord Grip (straight)  | 8.5-12.5         | 16              | ✓         |
| RTOB-14CG-S1 | Cord Grip (90°)            | 6-10.5           | 17              | ✓         |
| RTOB-14CG-S2 | Cord Grip (90°)            | 8.0-12.5         | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 14      Number of Contacts: 19  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 20

### Dimensions Jam Nut Receptacle

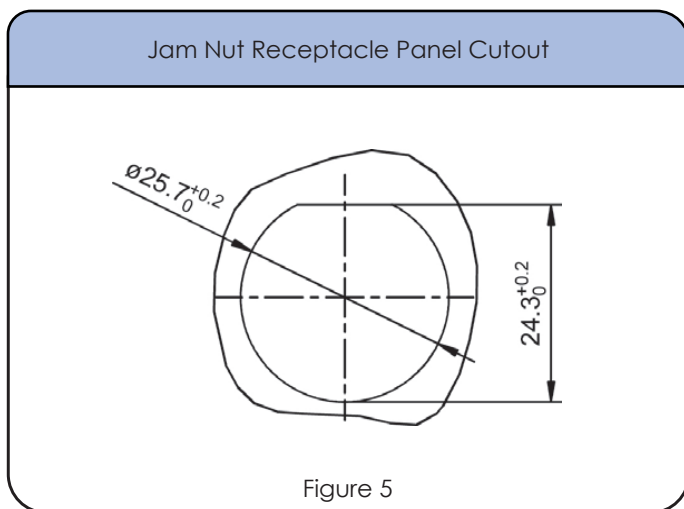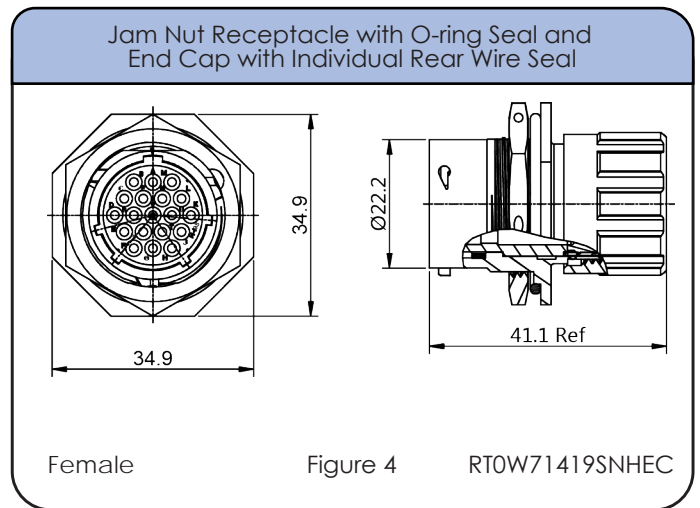
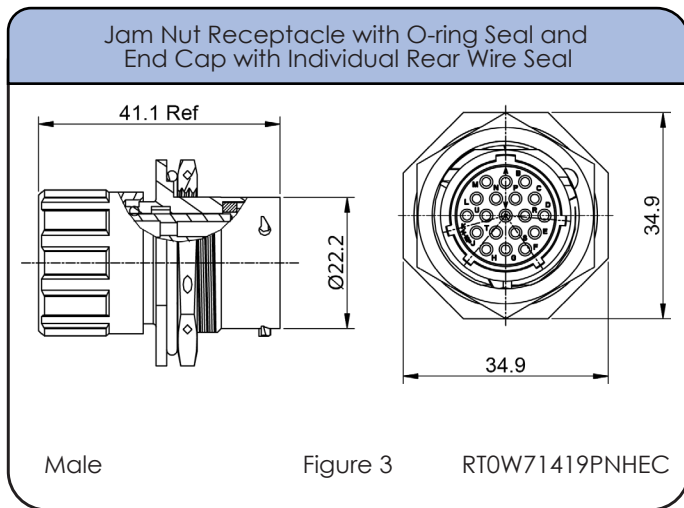
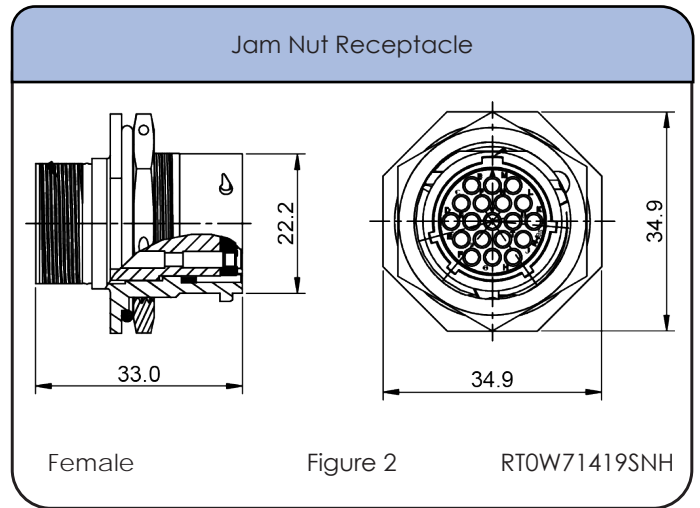
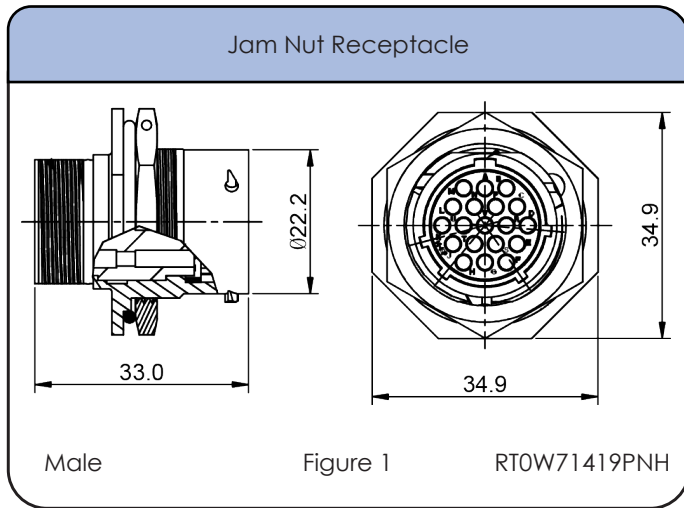


Shell Size: 14  
Sealing: IP67

Number of Contacts: 19  
Salt Spray: 48h

Contact Size: 20

## Dimensions Plug


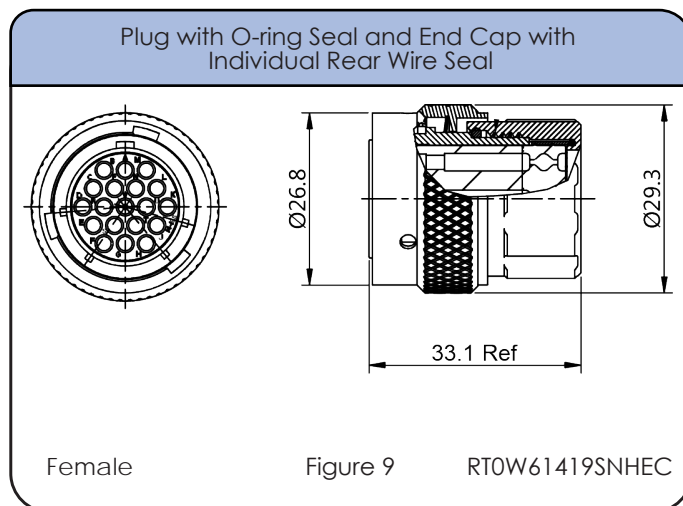
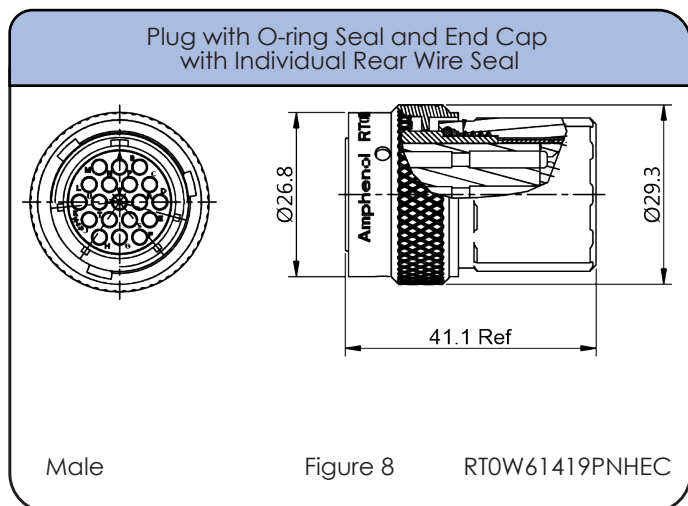
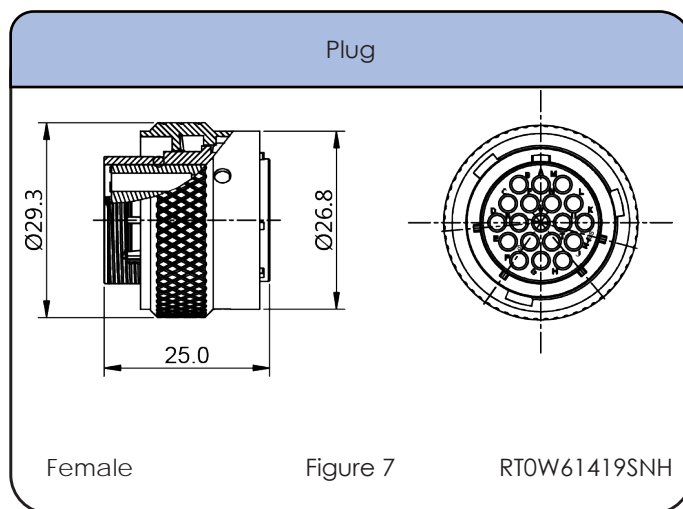
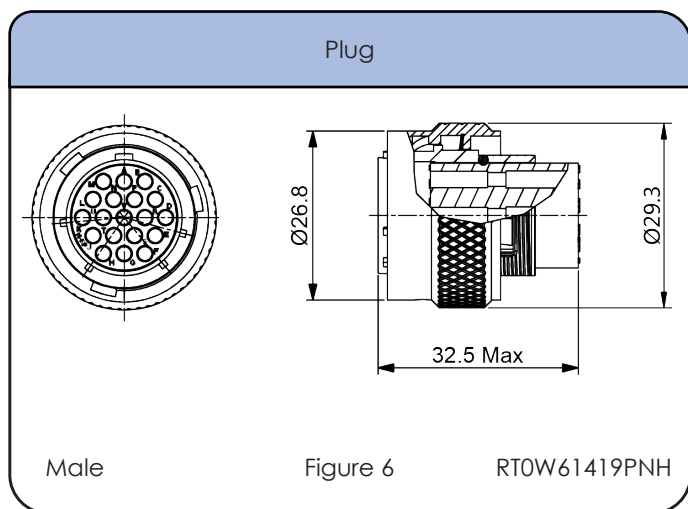


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 20           | Ø1.6mm - Ø2.6mm                       | 20 - 30 AWG |




Shell Size: 14    Number of Contacts: 19    Contact Size: 20  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

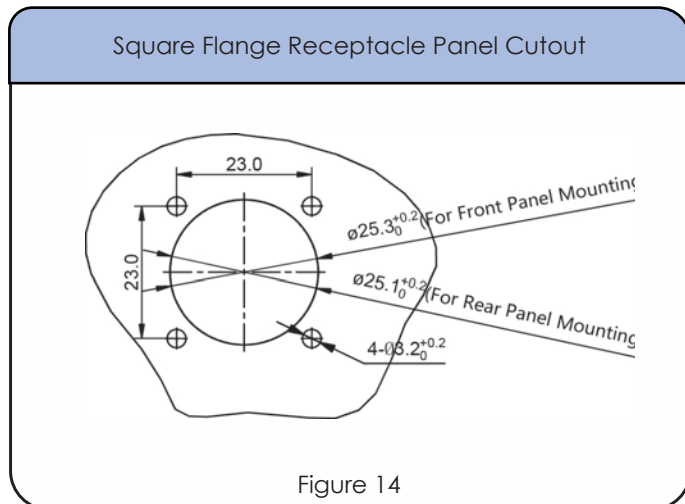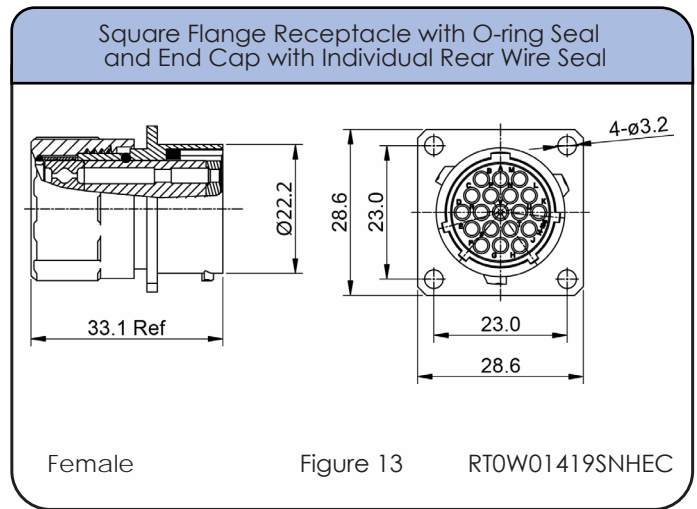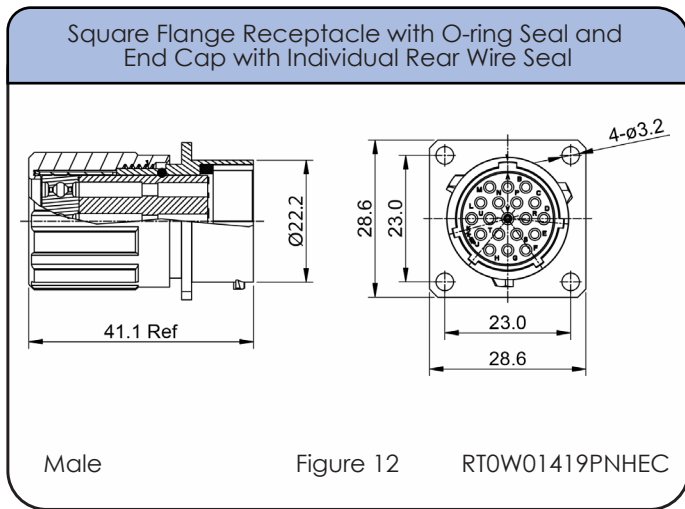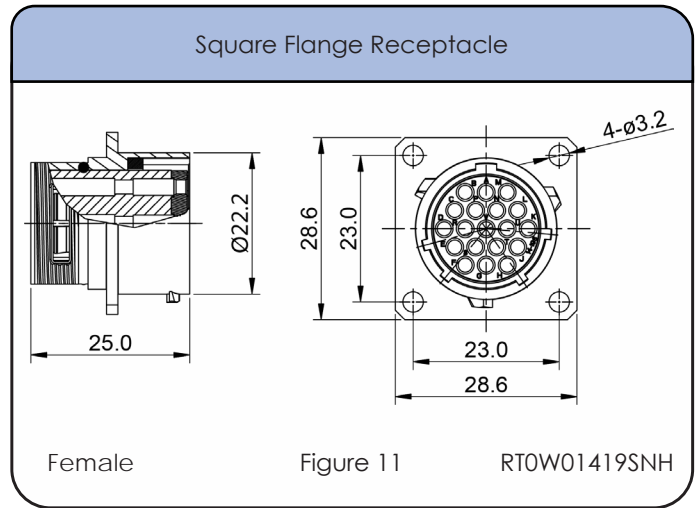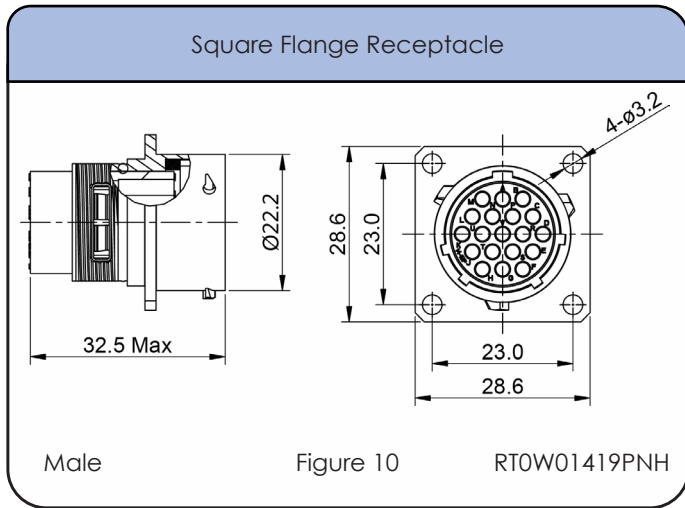

Shell Size: 14    Number of Contacts: 19    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

### Dimensions Backshell

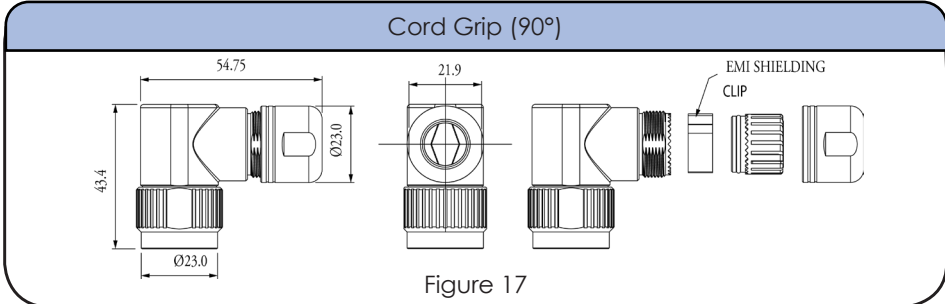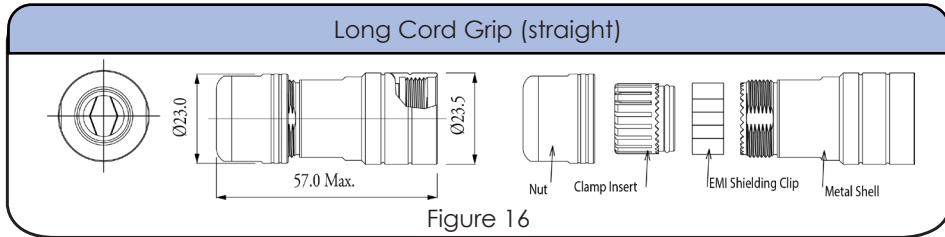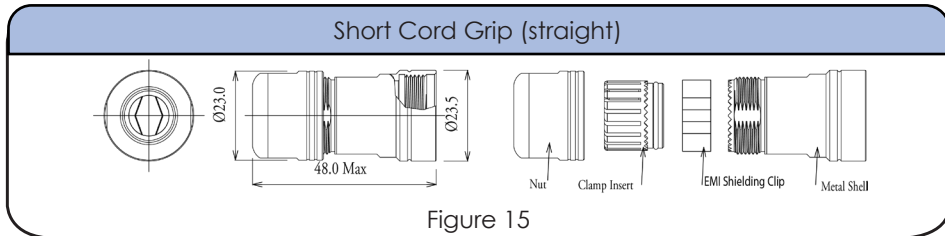

### Accessories

Locking Clip with Lanyard

108039114

**NEW!**  
See  
Page  
16

Plug Dustcap with Chain

RT614DCG

Plug Dustcap without Chain

RT614DC

Receptacle Dustcap with Chain

RT014DCG

Receptacle Dustcap with Nylon Cord, Made of Rubber

RT014RL

Receptacle Dustcap without Chain

RT014DC

Receptacle Dustcap without Nylon Cord, Rubber Material

RB00011914

Sealing Plug

AT13-204-2005

Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)

RTFD14B

Shell Size: 14  
Sealing: IP67

Number of Contacts: 19  
Salt Spray: 48h

Contact Size: 20

## Contacts



## Crimp Contacts, Machined (7.5A Max)

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP20W23F    | MS20W23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20W23G5   | MS20W23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 26-24 | .13-.25                       | Gold Flash |
| MP24W23G5   | MS24W23G5  | 26-24 | .13-.25                       | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 26-24 | .13-.25                       | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 26-24 | .13-.25                       | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 26-24 | .13-.25                       | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 30-28 | .05-.08                       | Gold Flash |
| MP28W23G5   | MS28W23G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools





Shell Size: 14      Number of Contacts: 19      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h

## Contacts (con't)



Stamped & Formed Contacts

## Crimp Contacts, Stamped & Formed (5A Max)

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP20W2F     | SS20W2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20W2G5    | SS20W2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20W2G10   | SS20W2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24W2F     | SS24W2F   | 26-24 | .14-.25                       | Gold Flash |
| SP24W2G5    | SS24W2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 26-24 | .14-.25                       | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 30-28 | .05-.08                       | Gold Flash |
| SP28W2G5    | SS28W2G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools




Contact Extraction Tool,  
#20 (Ø 1.0) Contact

QXRT20



Hand Tool, Stamped &  
Formed Contact, Size 20,  
20-28AWG

MFX-3958

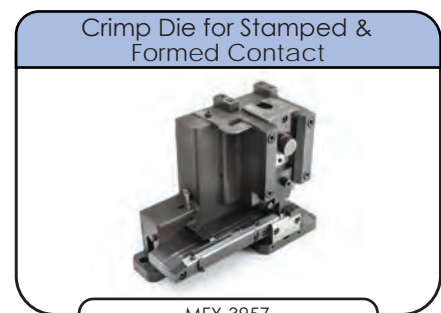

Crimp Die for Stamped &  
Formed Contact

MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 140

Shell Size: 16    Number of Contacts: 19    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

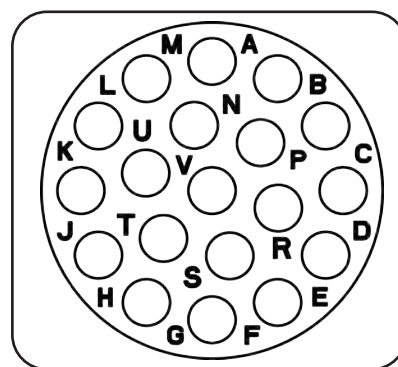

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RT071619PNH   | RT071619SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT071619PNHEC | RT071619SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT071619PNH-K | RT071619SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT061619PNH   | RT061619SNH   | Plug   | 6               | 7      |
| RT061619PNHEC | RT061619SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT061619PNH-K | RT061619SNH-K | Plug Kit   | 6               | 7      |
| RT001619PNH   | RT001619SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT001619PNHEC | RT001619SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT001619PNH-K | RT001619SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 140

\*\*See page 137 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-16CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RTOS-16CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RTOL-16CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RTOL-16CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |
| RTOB-16CG-S1 | Cord Grip (90°)            | 9.5-14.5         | 17              | ✓         |
| RTOB-16CG-S2 | Cord Grip (90°)            | 13.5-17.0        | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 16    Number of Contacts: 19  
 Sealing: IP67    Salt Spray: 48h





Contact Size: 16

### Dimensions Jam Nut Receptacle

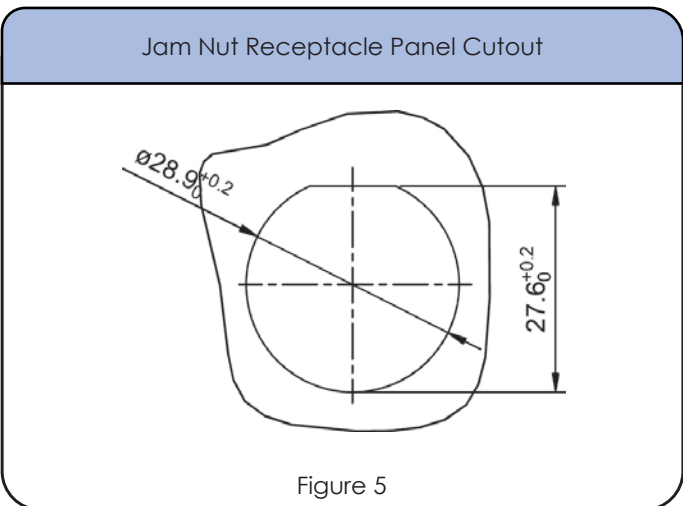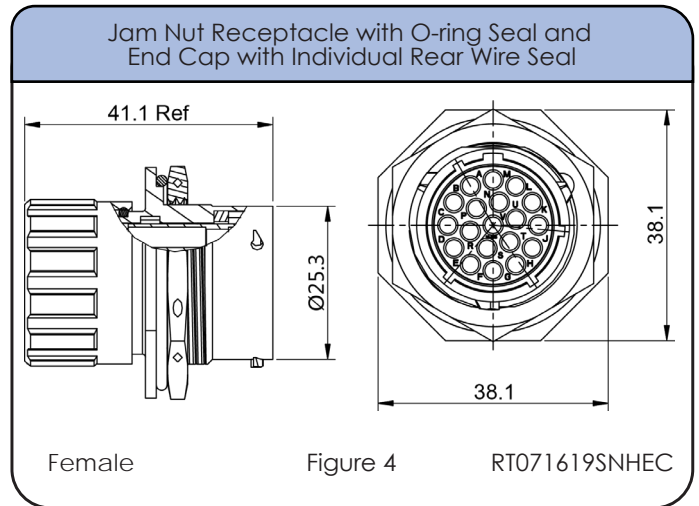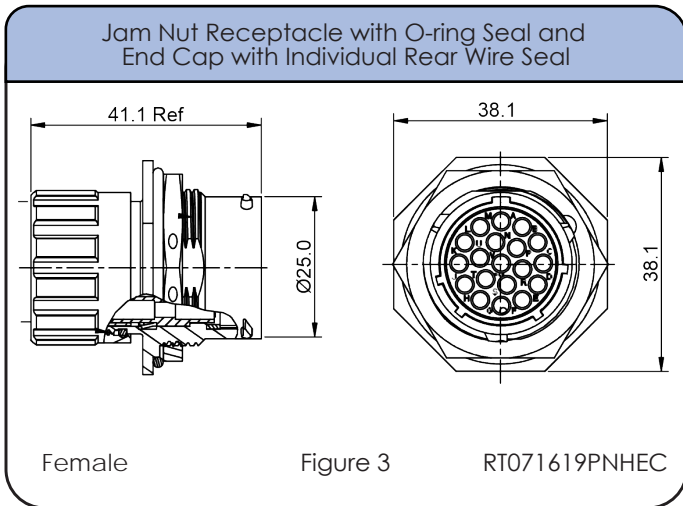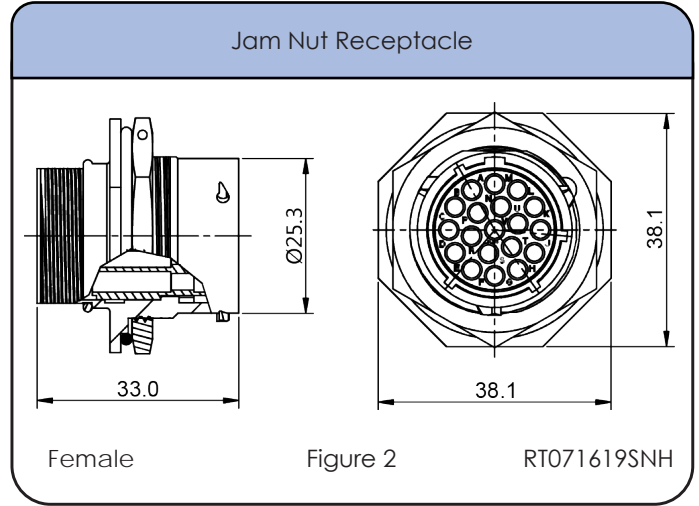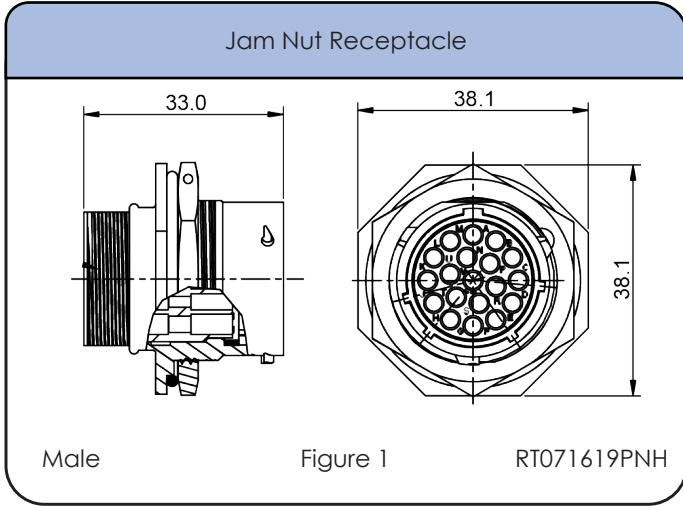

Shell Size: 16      Number of Contacts: 19      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Dimensions Plug


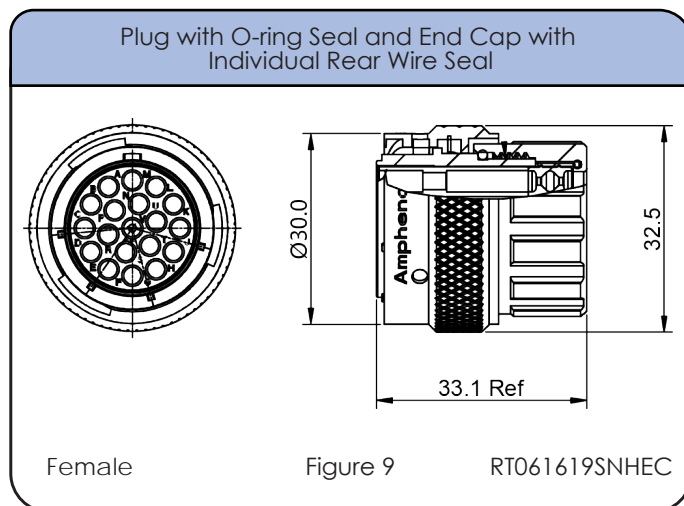
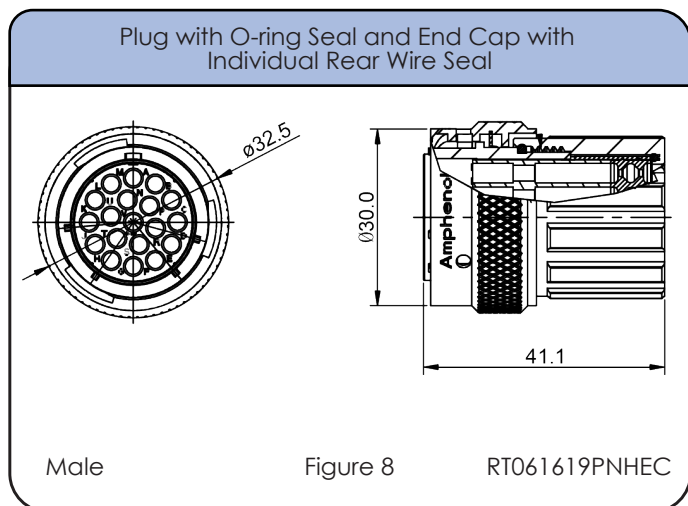
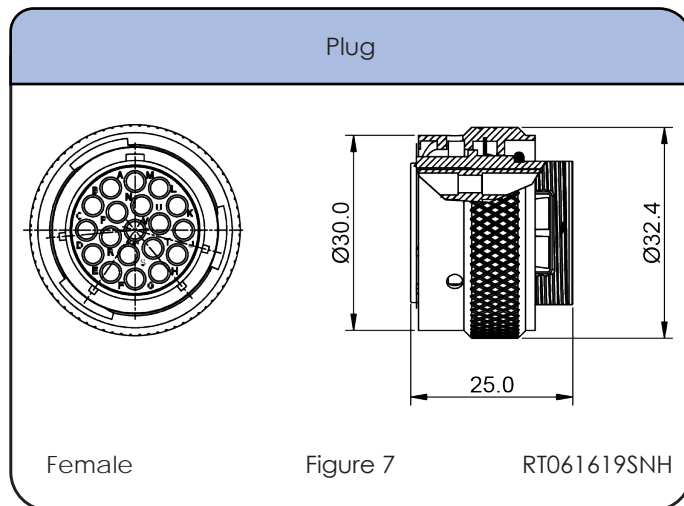
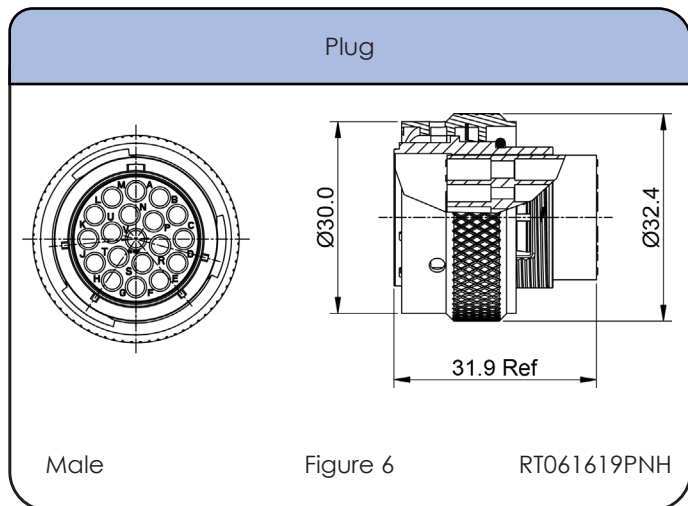


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 16    Number of Contacts: 19    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h




## Dimensions Square Flange Receptacle

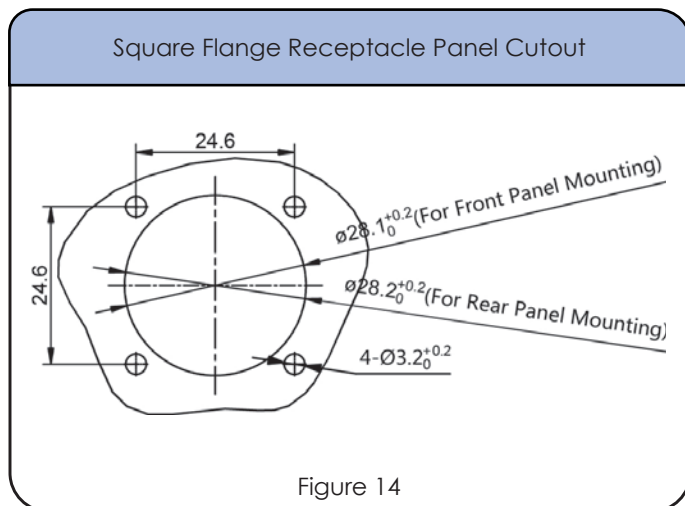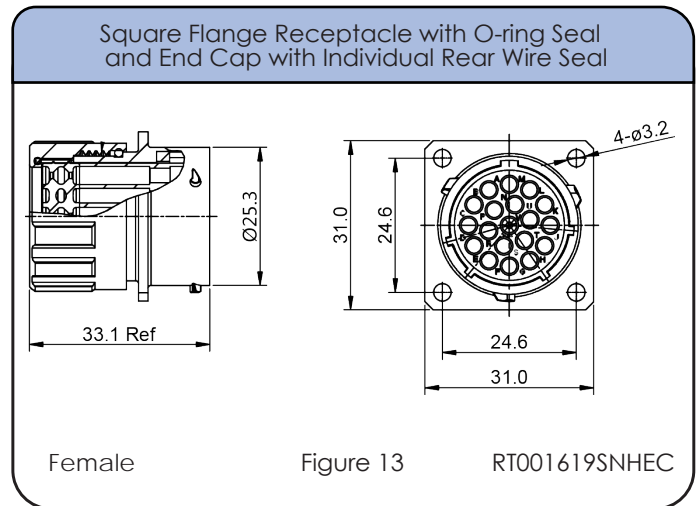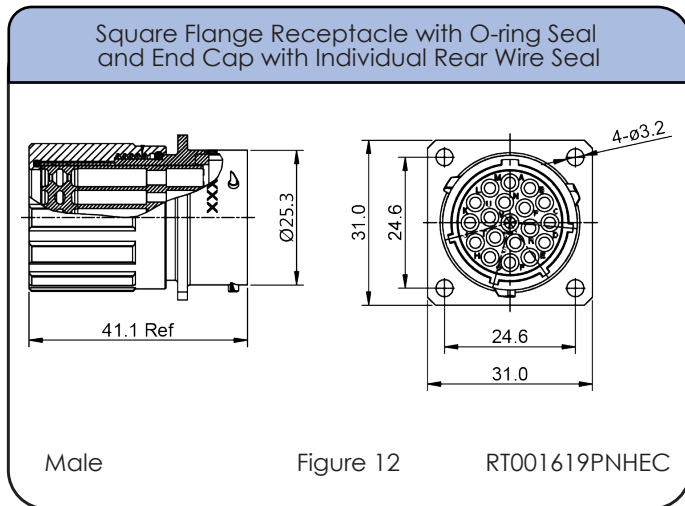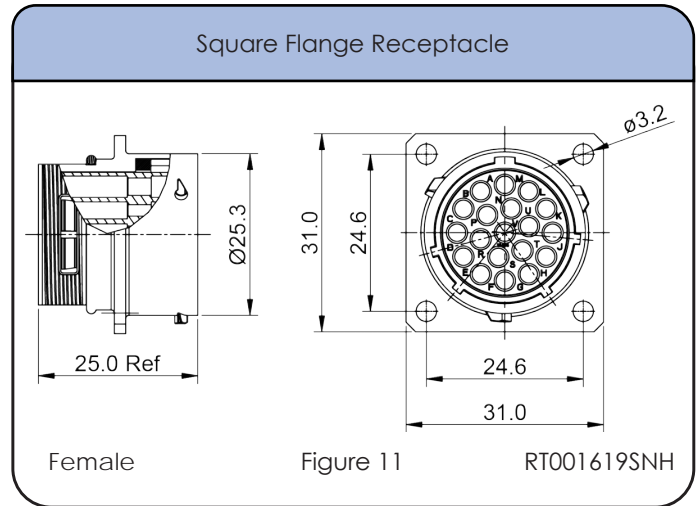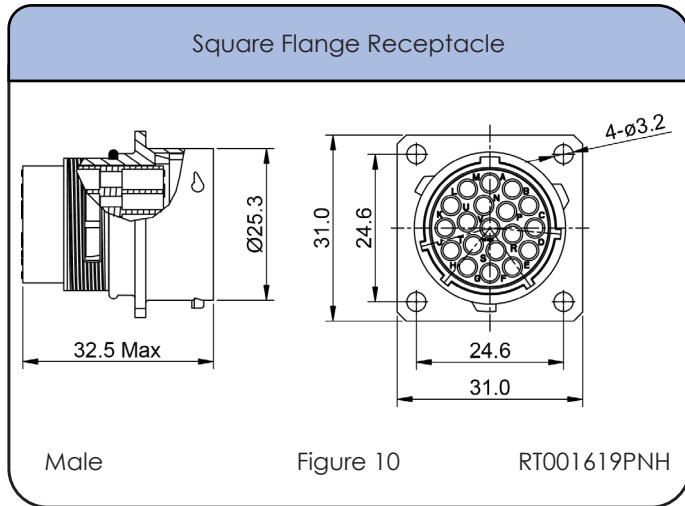



Shell Size: 16      Number of Contacts: 19      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

## Dimensions Backshell

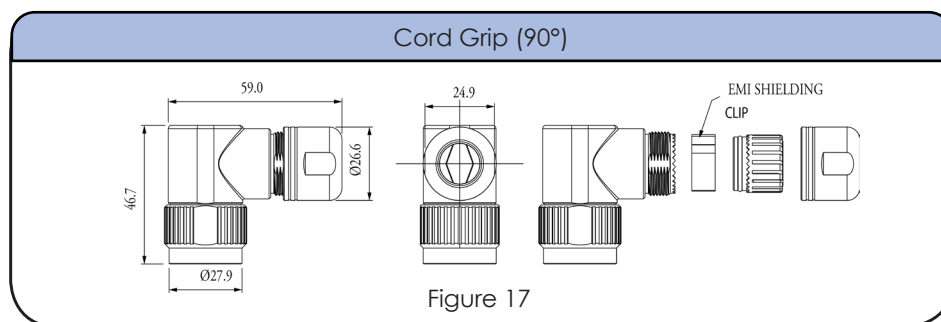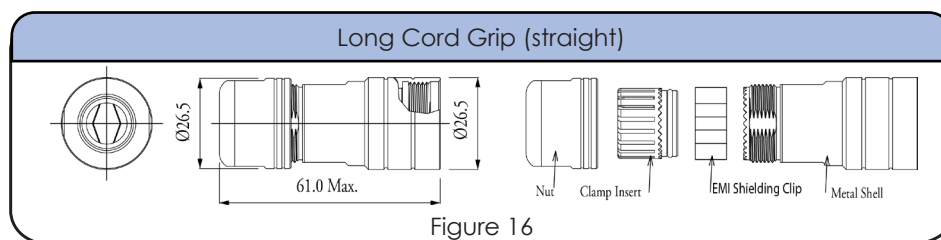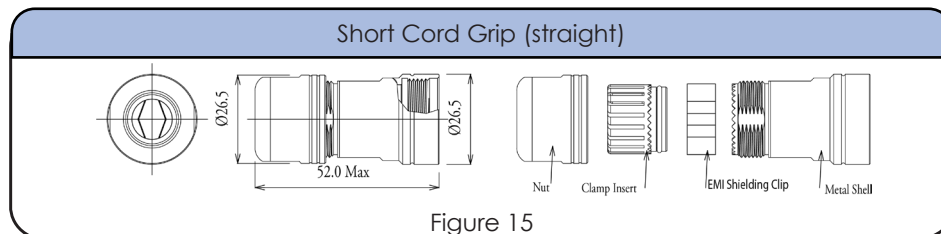

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039116</p>                              | <p>Plug Dustcap with Chain</p> <p>RT616DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT616DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT016DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT016RL</p>       | <p>Receptacle Dustcap without Chain</p> <p>RT016DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011916</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD16B</p> |  |   |  |

Shell Size: 16  
Sealing: IP67

Number of Contacts: 19  
Salt Spray: 48h

Contact Size: 16


## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

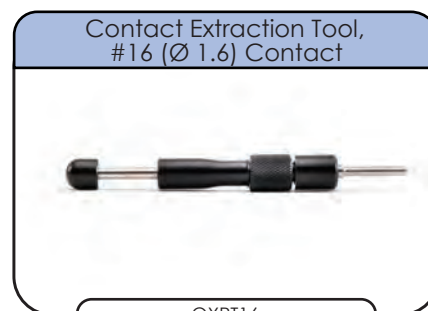

Shell Size: 16      Number of Contacts: 19      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

## Contacts (con't)



Stamped & Formed Contacts

## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Tool, Stamped & Formed  
Contact, Size 16, 20-14AWG



MFX-3954

Crimp Die for Stamped &  
Formed Contact



MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



**OR**  
Square Flange Receptacles



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 148

Shell Size: 18      Number of Contacts: 23      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

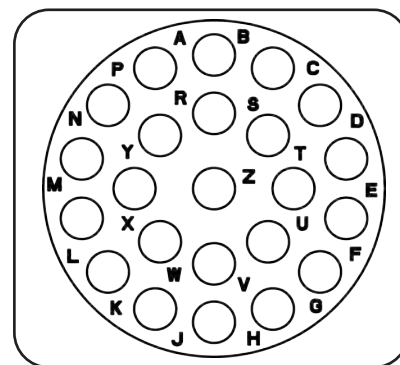

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RT071823PNH   | RT071823SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT071823PNHEC | RT071823SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT071823PNH-K | RT071823SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT061823PNH   | RT061823SNH   | Plug   | 6               | 7      |
| RT061823PNHEC | RT061823SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT061823PNH-K | RT061823SNH-K | Plug Kit   | 1,5             | 2,5    |
| RT001823PNH   | RT001823SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT001823PNHEC | RT001823SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT001823PNH-K | RT001823SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 148

\*\*See page 145 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RT0S-18CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RT0S-18CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RT0L-18CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RT0L-18CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 18      Number of Contacts: 23  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 16

## Dimensions Jam Nut Receptacle

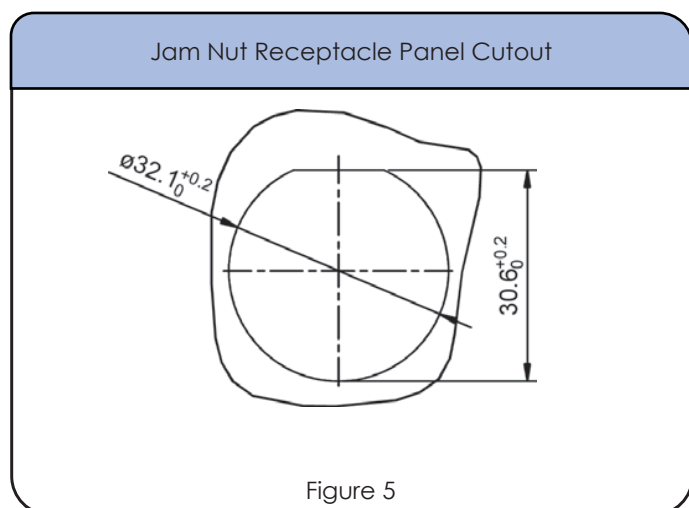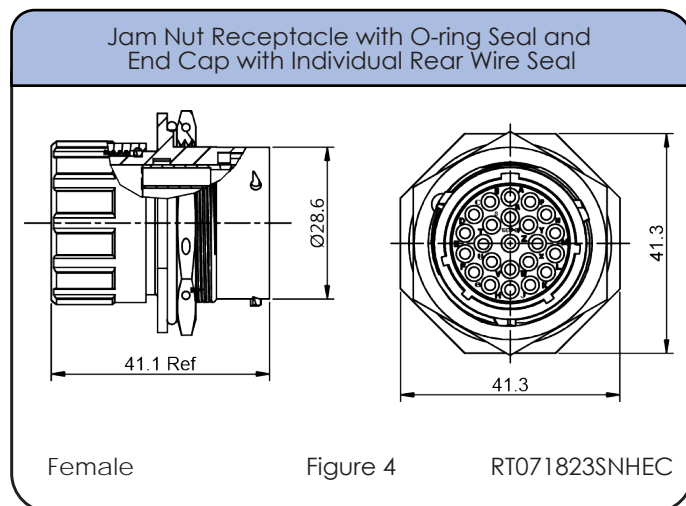
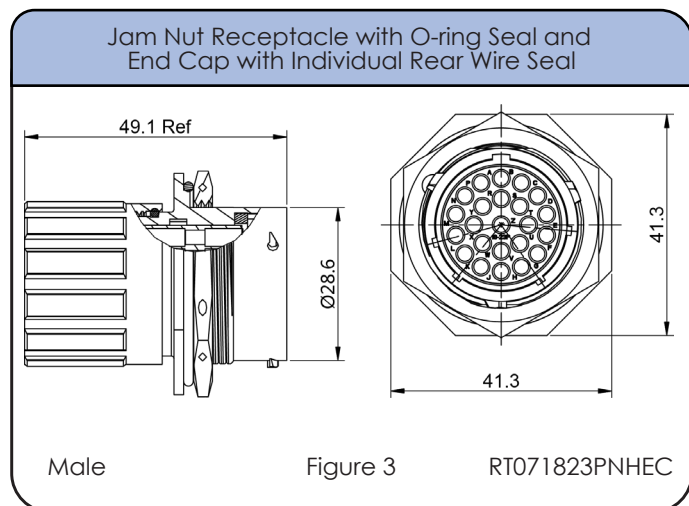
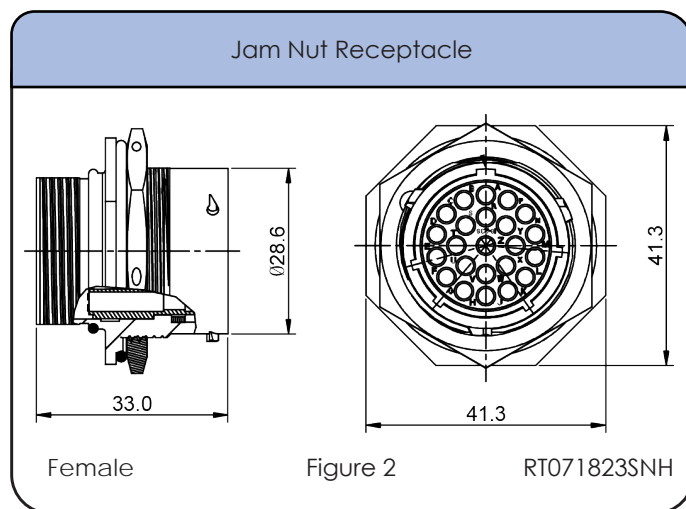
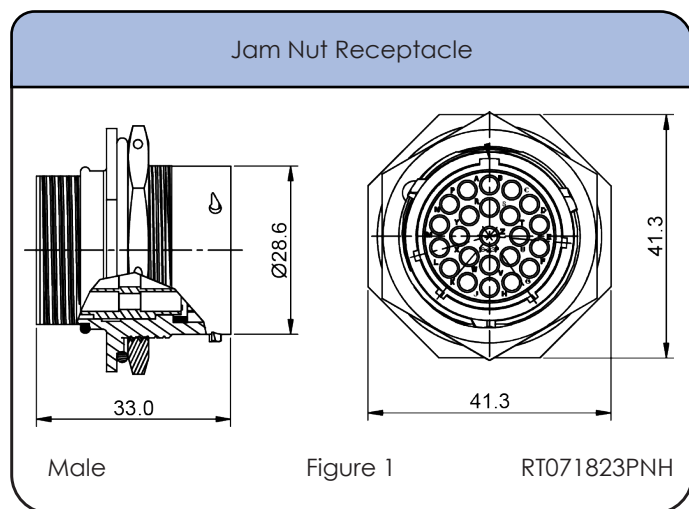




Shell Size: 18      Number of Contacts: 23  
Sealing: IP67      Salt Spray: 48h

Contact Size: 16

### Dimensions Plug


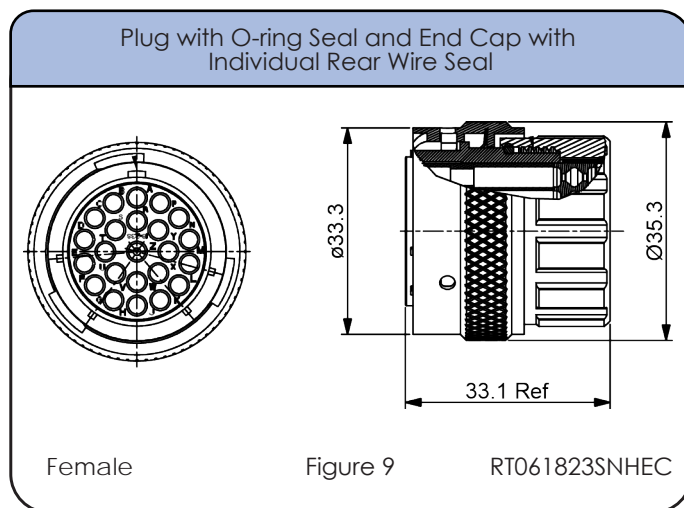
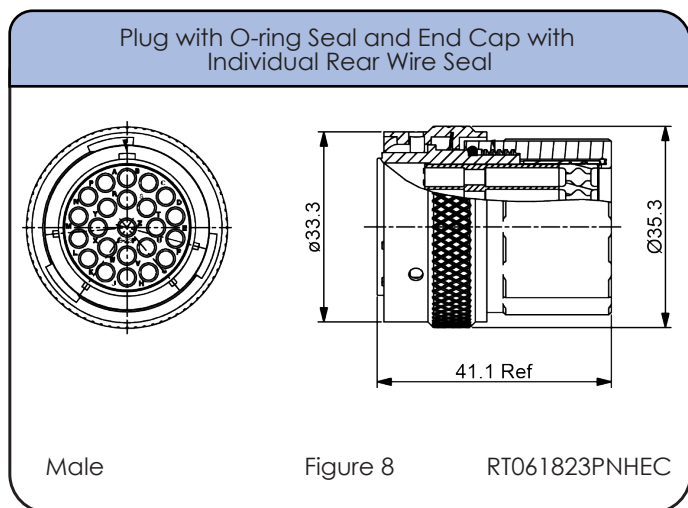
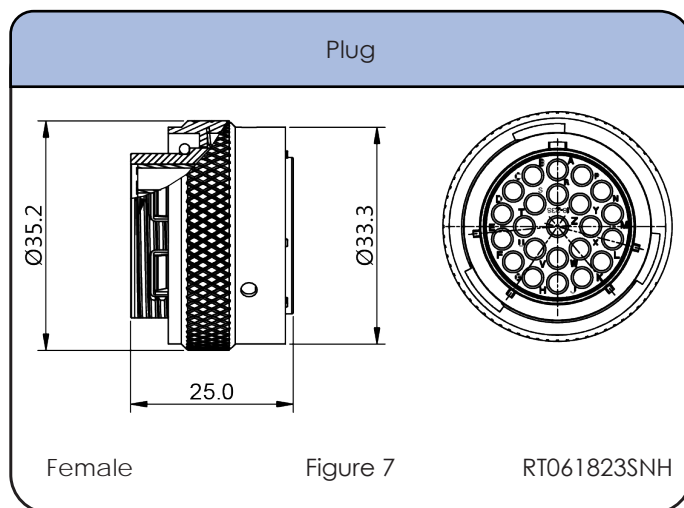
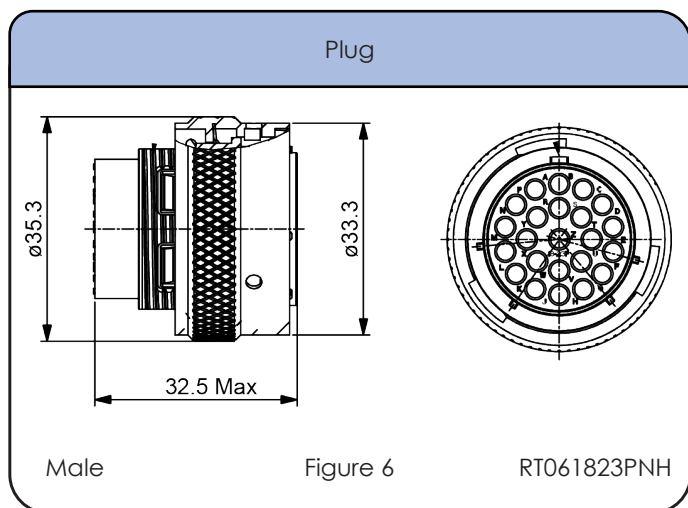


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |



Shell Size: 18    Number of Contacts: 23    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

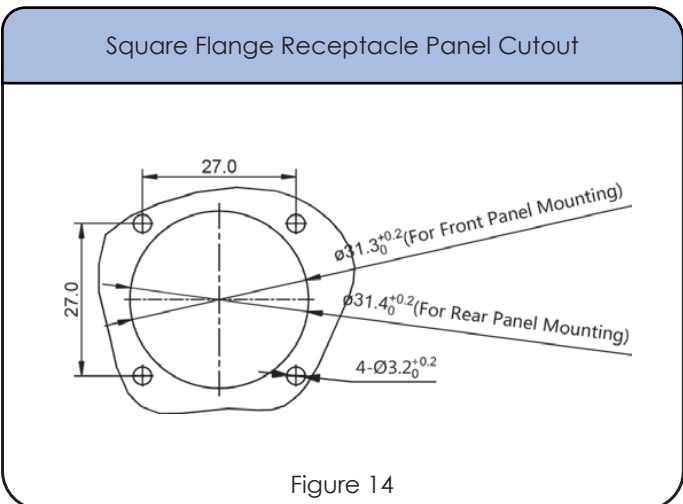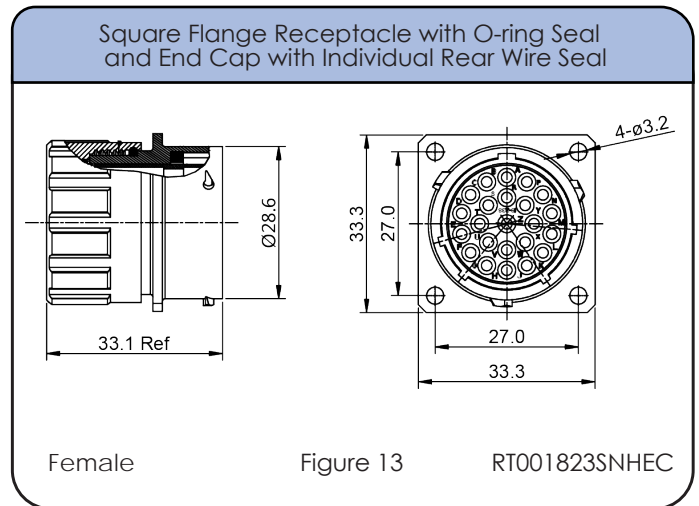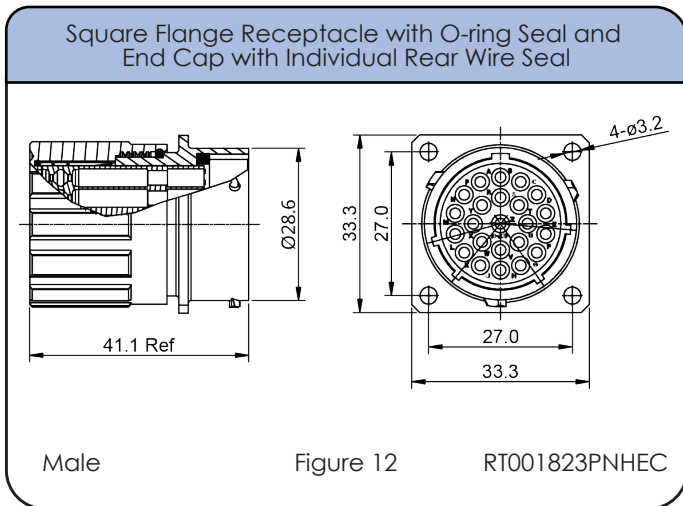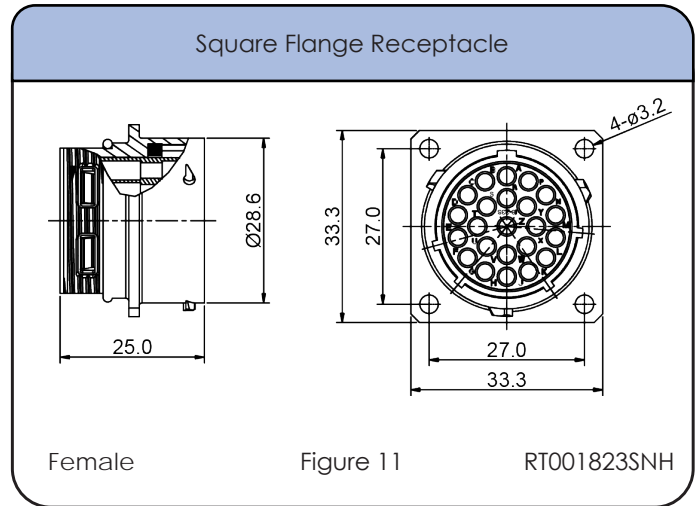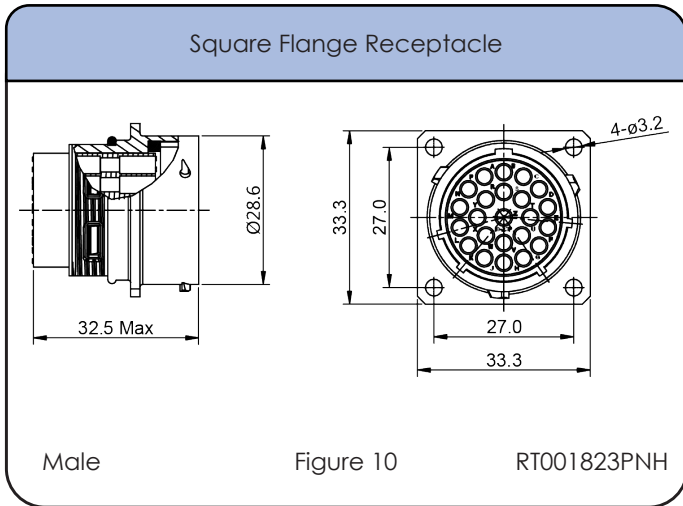

Shell Size: 18    Number of Contacts: 23    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

## Dimensions Backshell

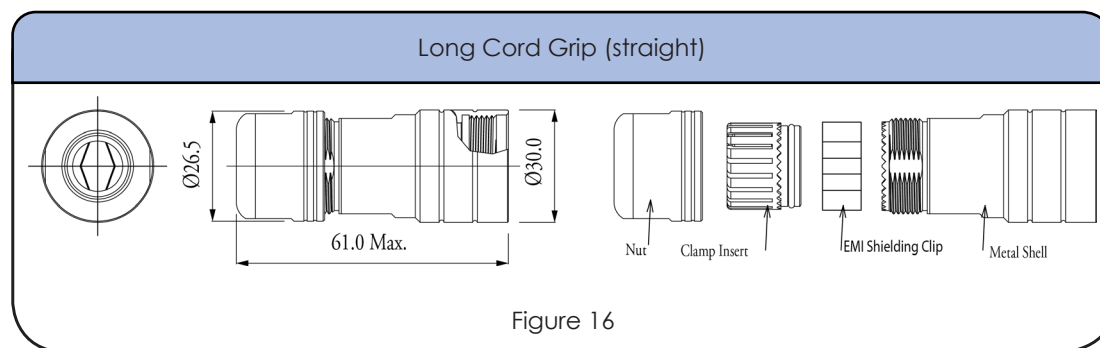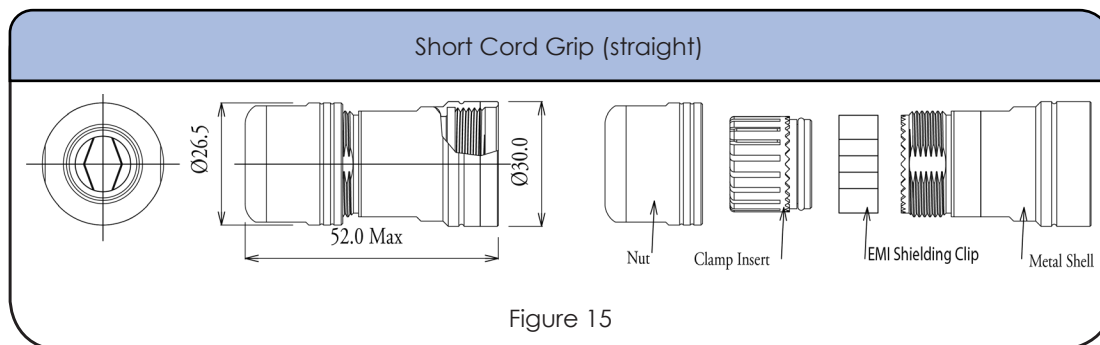

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>NEW!<br/>See Page 16</p> <p>108039118</p>  | <p>Plug Dustcap with Chain</p> <p>RT618DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT618DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT018DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord, Made of Rubber</p> <p>RT018RL</p>       | <p>Receptacle Dustcap without Chain</p> <p>RT018DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011918</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD18B</p> |  |   |  |

Shell Size: 18  
Sealing: IP67

Number of Contacts: 23  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23FG5  | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23FG10 | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23FG15 | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools



Shell Size: 18      Number of Contacts: 23      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h


## Contacts (con't)



## Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

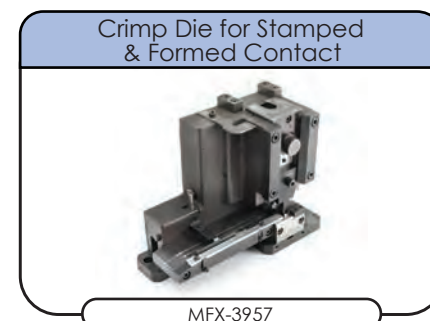

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**  
Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 156




Shell Size: 16    Number of Contacts: 26    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

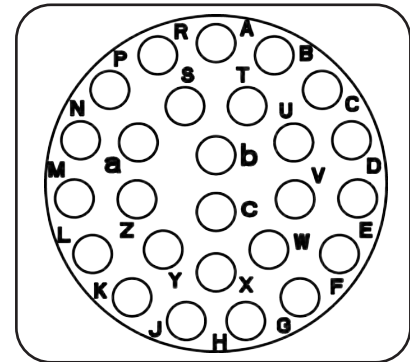

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number    |                | Connector Type  | Figure Drawings |        |
|----------------|----------------|---|-----------------|--------|
| Male           | Female         |   | Male            | Female |
| RTOW71626PNH   | RTOW71626SNH   | Jam Nut Receptacle  | 1,5             | 2,5    |
| RTOW71626PNHEC | RTOW71626SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**                | 3,5             | 4,5    |
| RTOW71626PNH-K | RTOW71626SNH-K | Jam Nut Receptacle Kit  | 1,5             | 2,5    |
| RTOW61626PNH   | RTOW61626SNH   | Plug  | 6               | 7      |
| RTOW61626PNHEC | RTOW61626SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                              | 8               | 9      |
| RTOW61626PNH-K | RTOW61626SNH-K | Plug Kit  | 6               | 7      |
| RTOW01626PNH   | RTOW01626SNH   | Square Flange Receptacle  | 10,14           | 11,14  |
| RTOW01626PNHEC | RTOW01626SNHEC | Square Flange Receptacle with Unshielded Backshell and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RTOW01626PNH-K | RTOW01626SNH-K | Square Flange Receptacle Kit  | 10,14           | 11,14  |

Contacts supplied separately see page 156

\*\*See page 153 for the real seal wire range

**Backshells**






| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-16CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RTOS-16CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RTOL-16CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RTOL-16CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |
| RTOB-16CG-S1 | Cord Grip (90°)            | 9.5-14.5         | 17              | ✓         |
| RTOB-16CG-S2 | Cord Grip (90°)            | 13.5-17.0        | 17              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 16      Number of Contacts: 26  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 20

### Dimensions Jam Nut Receptacle

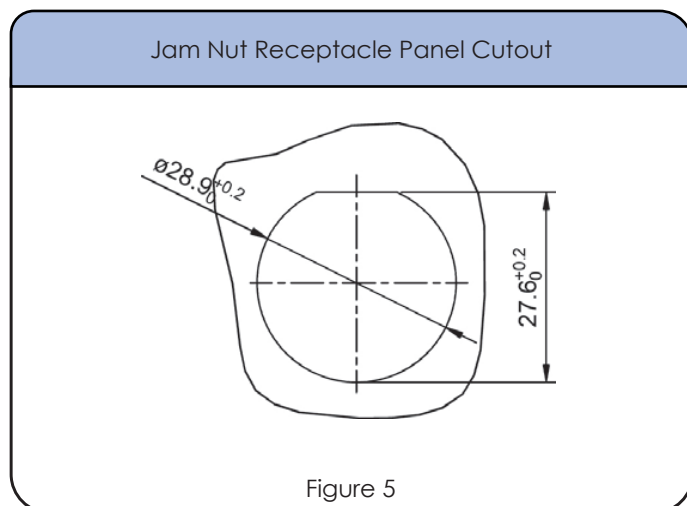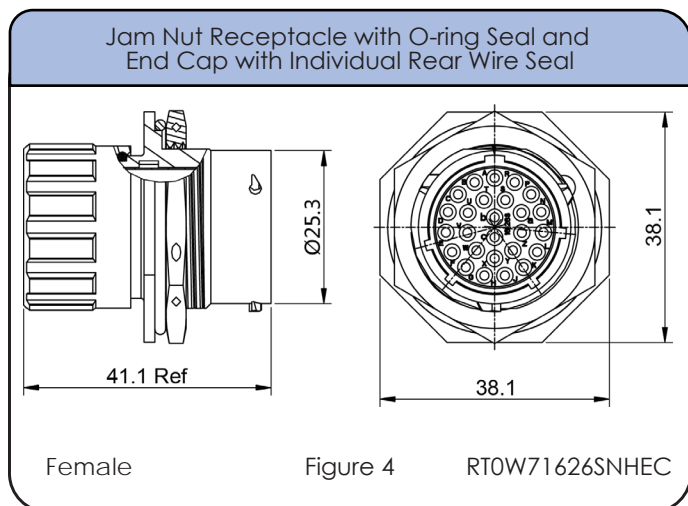
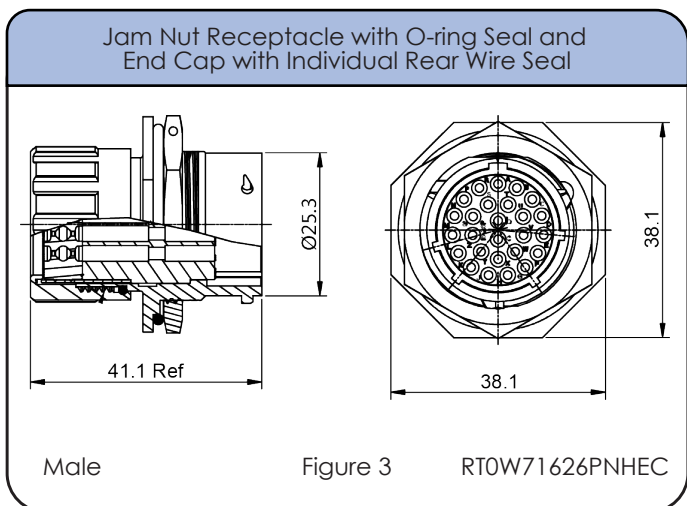
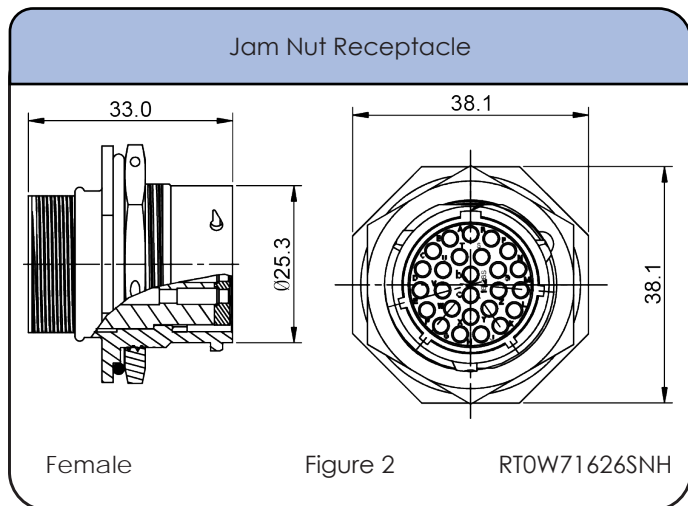
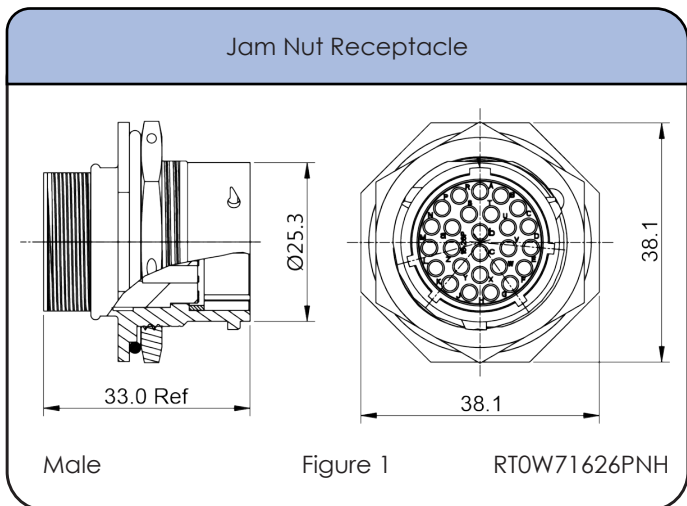


Shell Size: 16  
Sealing: IP67

Number of Contacts: 26  
Salt Spray: 48h

Contact Size: 20

## Dimensions Plug


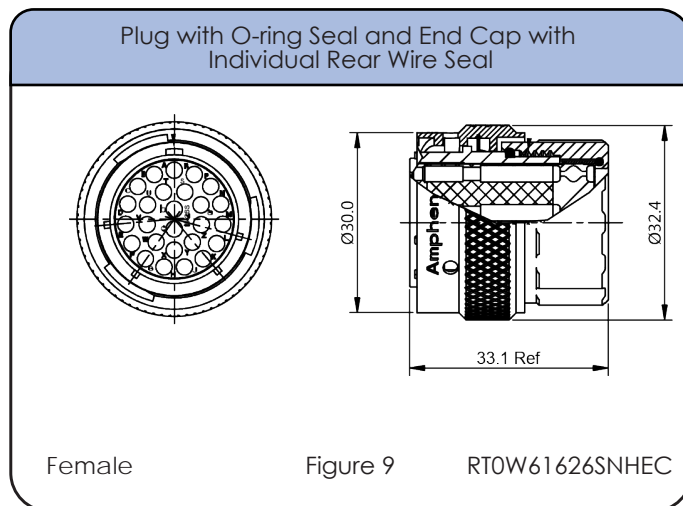
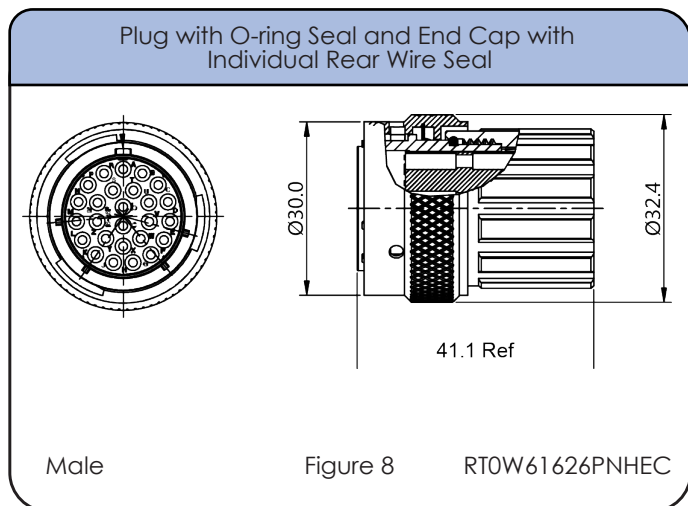
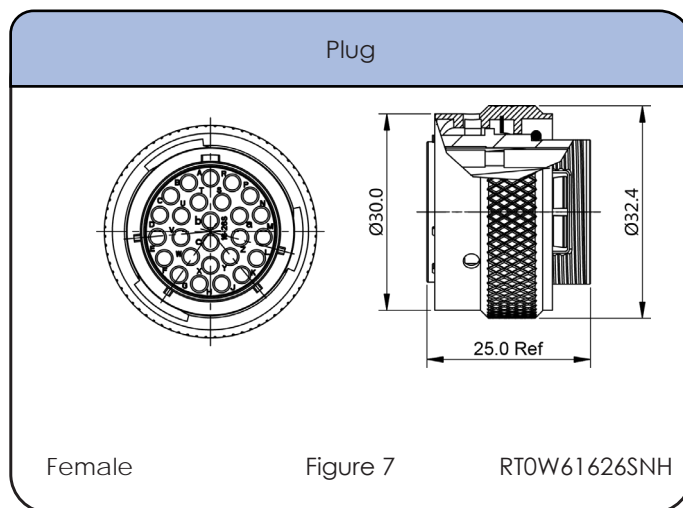
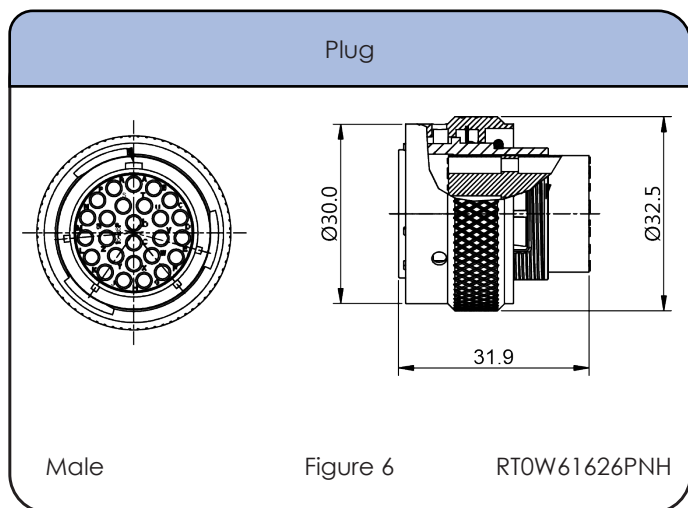


## Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 20           | Ø1.6mm - Ø2.6mm                       | 20 - 30 AWG |




Shell Size: 16      Number of Contacts: 26      Contact Size: 20  
 Sealing: IP67      Salt Spray: 48h

## Dimensions Square Flange Receptacle

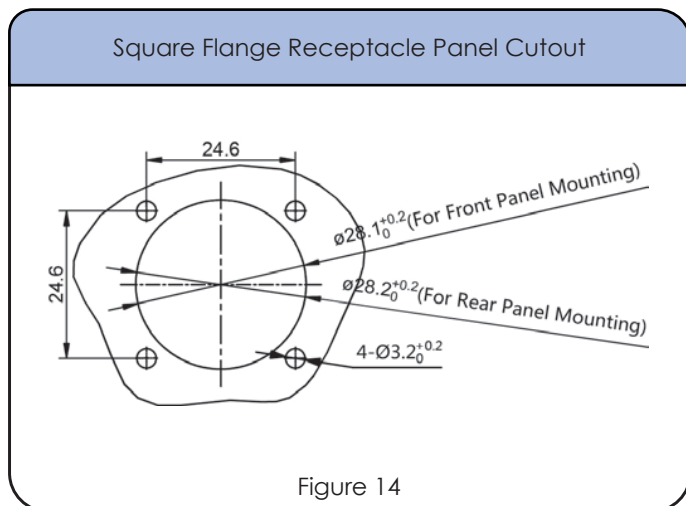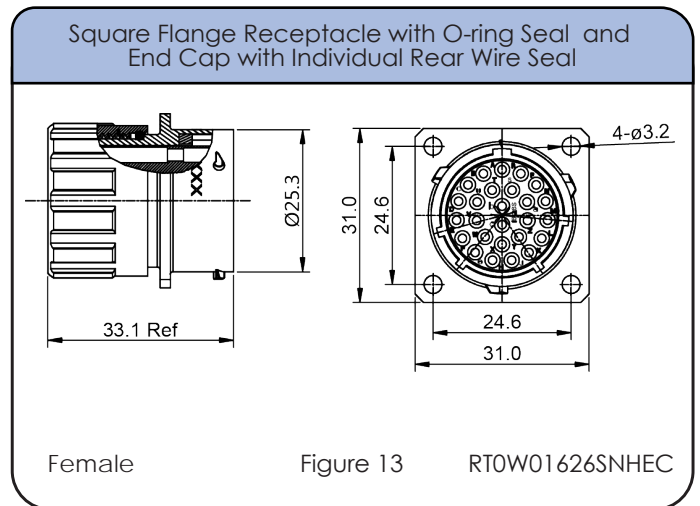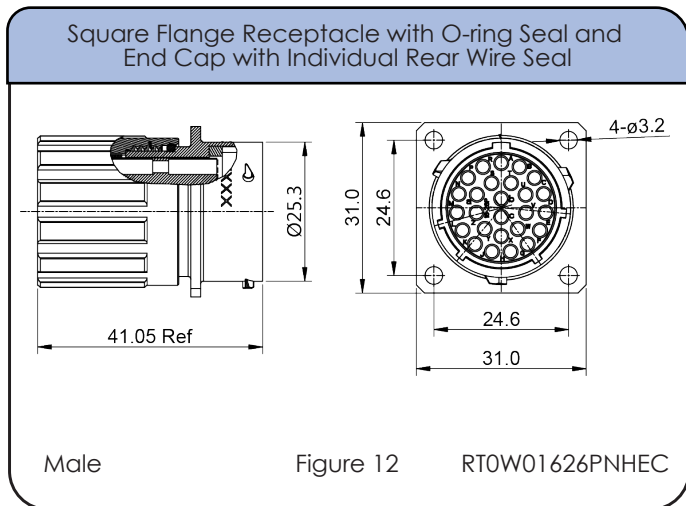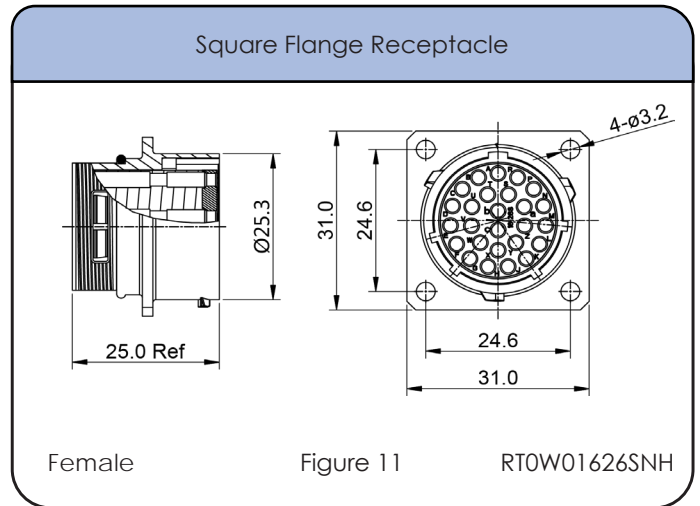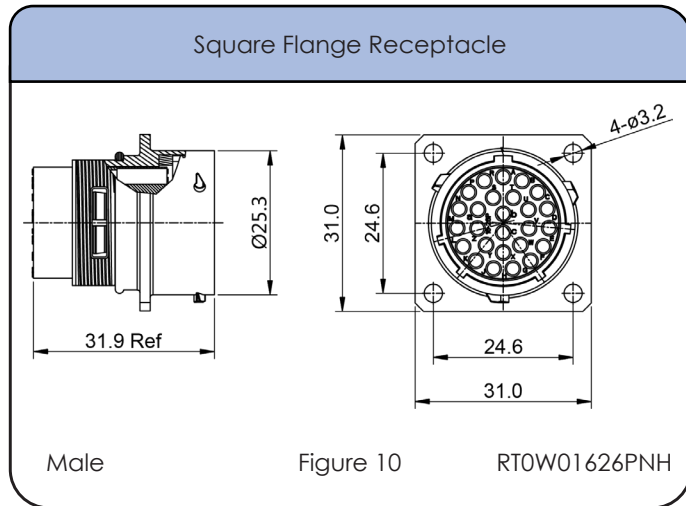

Shell Size: 16      Number of Contacts: 26      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h


## Dimensions Backshell

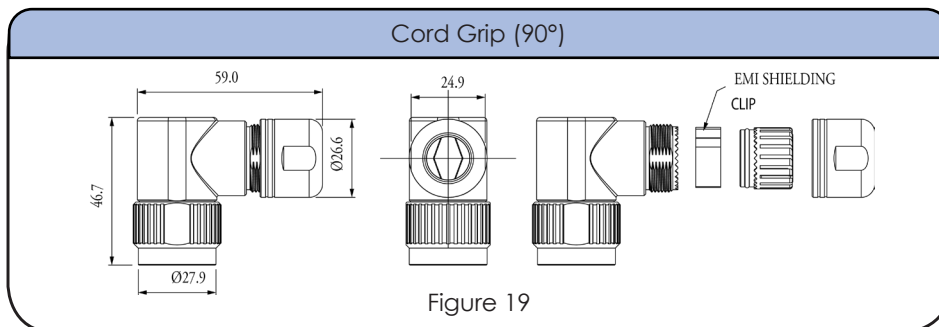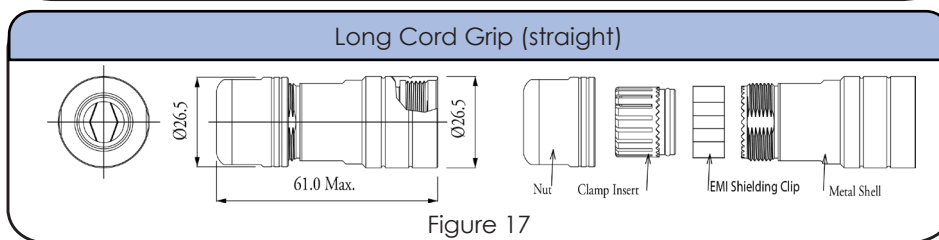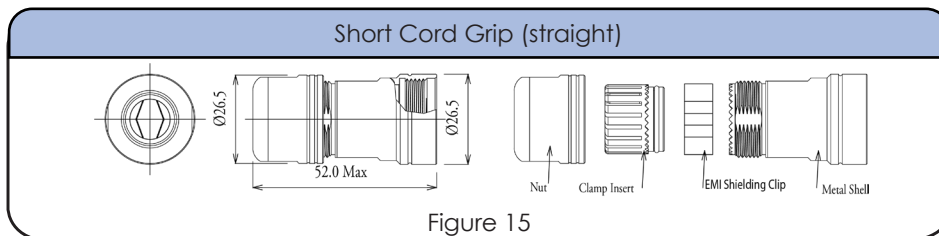

## Accessories



NEW!  
See  
Page  
16



Shell Size: 16  
Sealing: IP67

Number of Contacts: 26  
Salt Spray: 48h

Contact Size: 20

## Contacts



## Crimp Contacts, Machined (7.5A Max)

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP20W23F    | MS20W23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20W23G5   | MS20W23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 26-24 | .13-.25                       | Gold Flash |
| MP24W23G5   | MS24W23G5  | 26-24 | .13-.25                       | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 26-24 | .13-.25                       | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 26-24 | .13-.25                       | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 26-24 | .13-.25                       | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 30-28 | .05-.08                       | Gold Flash |
| MP28W23G5   | MS28W23G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools





Shell Size: 16      Number of Contacts: 26      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h

## Contacts (con't)



Stamped & Formed Contacts

## Crimp Contacts, Stamped & Formed (5A Max)

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP20W2F     | SS20W2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20W2G5    | SS20W2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20W2G10   | SS20W2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24W2F     | SS24W2F   | 26-24 | .14-.25                       | Gold Flash |
| SP24W2G5    | SS24W2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 26-24 | .14-.25                       | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 30-28 | .05-.08                       | Gold Flash |
| SP28W2G5    | SS28W2G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#20 (Ø 1.0) Contact



QXRT20

Hand Tool, Stamped &  
Formed Contact, Size 20,  
20-28AWG



MFX-3958

Crimp Die for Stamped &  
Formed Contact



MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



**OR**  
Square Flange Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**

Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 164

Shell Size: 20    Number of Contacts: 28    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

**eco | mate<sup>®</sup> rm**  
**Standard Products**

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

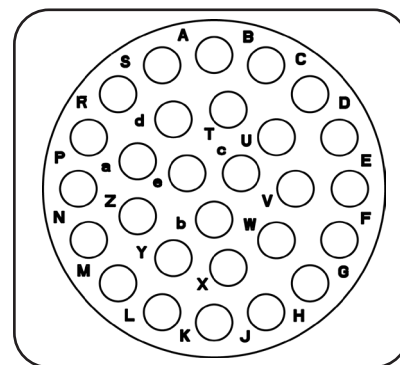

Insert Arrangement  
Pin (Male) Faceview

**Connector Part Numbers**

| Part Number   |               | Connector Type   | Figure Drawings |        |
|---------------|---------------|--|-----------------|--------|
| Male          | Female        |  | Male            | Female |
| RT072028PNH   | RT072028SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RT072028PNHEC | RT072028SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RT072028PNH-K | RT072028SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RT062028PNH   | RT062028SNH   | Plug   | 6               | 7      |
| RT062028PNHEC | RT062028SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RT062028PNH-K | RT062028SNH-K | Plug Kit   | 6               | 7      |
| RT002028PNH   | RT002028SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RT002028PNHEC | RT002028SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RT002028PNH-K | RT002028SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 164

\*\*See page 153 for the real seal wire range

**Backshells**






| Part Number   | Backshell Type            | Cable Range (mm) | Figure Drawings | Shielding |
|---------------|---------------------------|------------------|-----------------|-----------|
| RT0L-20CPG-S5 | Long Cord Grip (straight) | 12.5-13.3        | 15              | ✓         |
| RT0L-20CPG-S6 | Long Cord Grip (straight) | 15.5-19.5        | 15              | ✓         |

\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 20      Number of Contacts: 28  
 Sealing: IP67      Salt Spray: 48h

Contact Size: 16





### Dimensions Jam Nut Receptacle

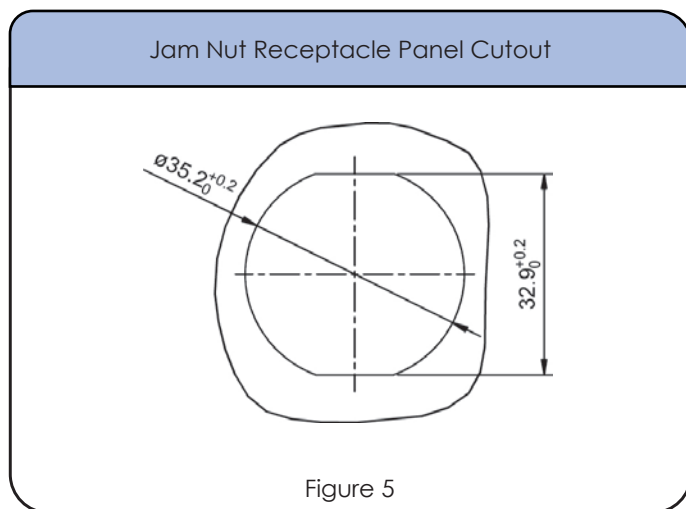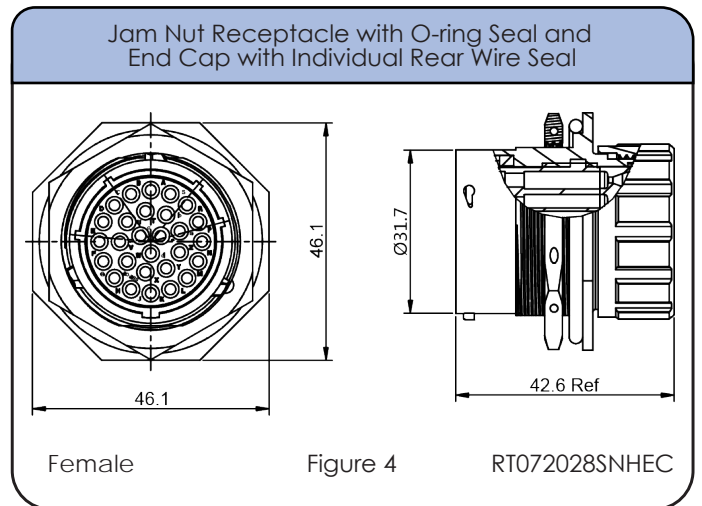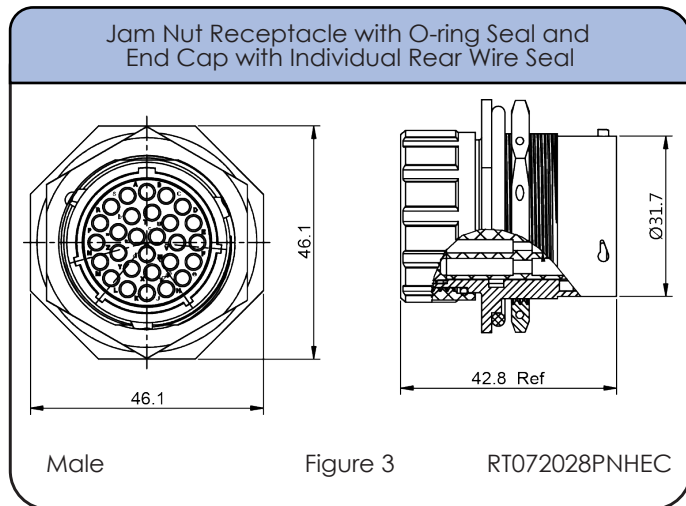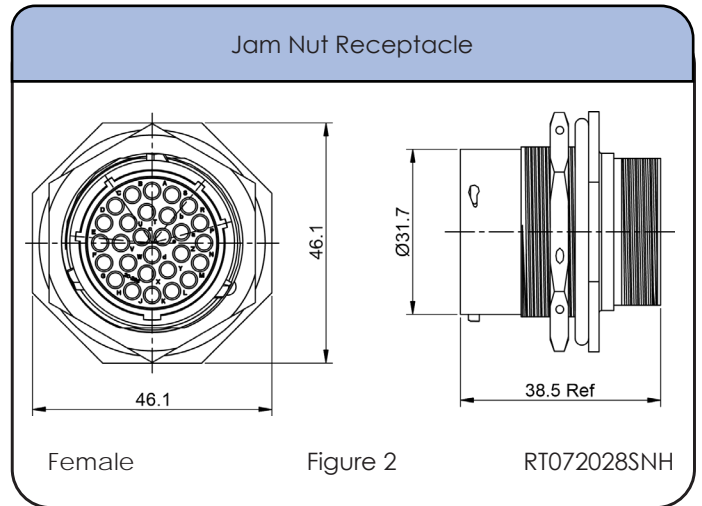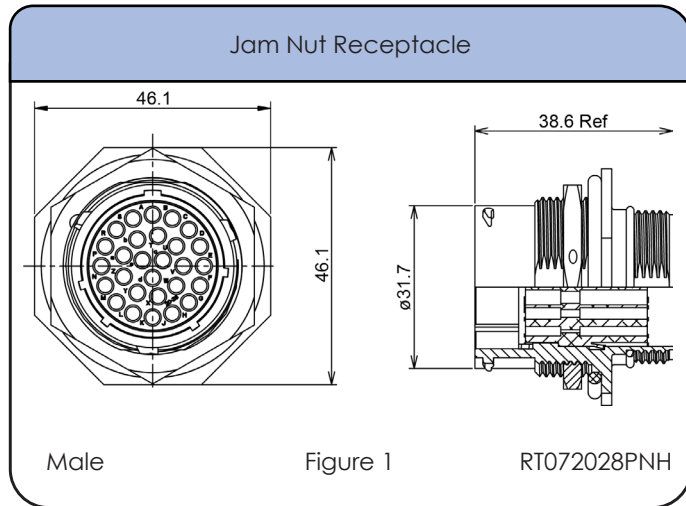

Shell Size: 20      Number of Contacts: 28  
Sealing: IP67      Salt Spray: 48h

Contact Size: 16

### Dimensions Plug


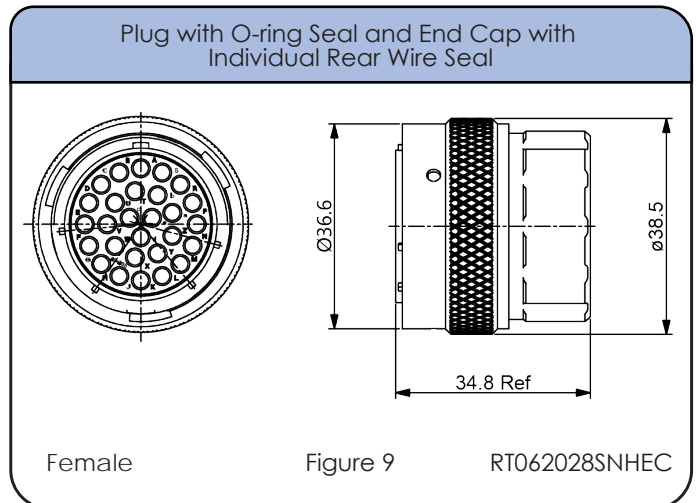
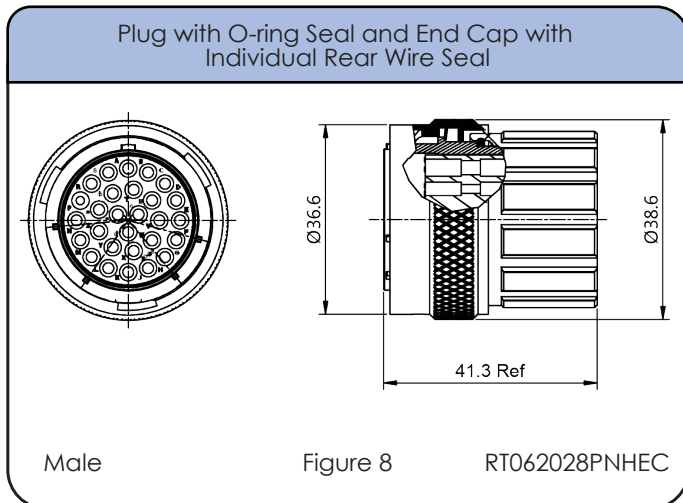
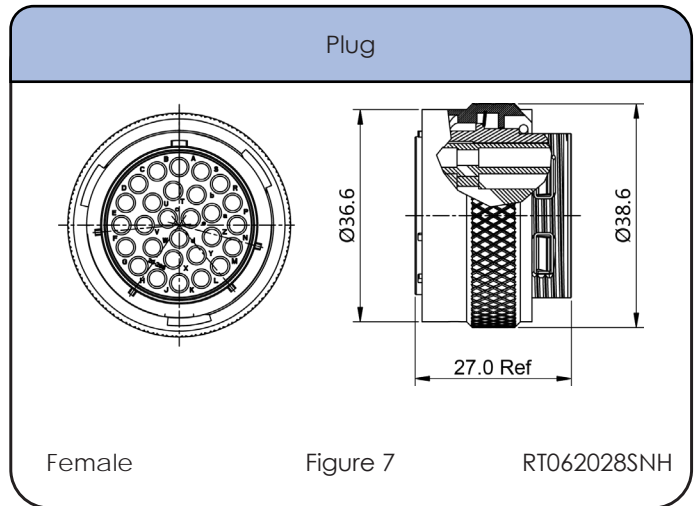
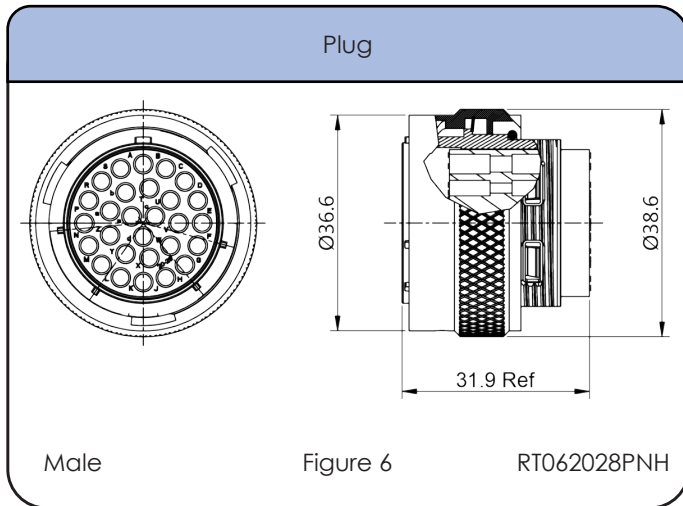


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 16           | Ø2.0mm - Ø3.2mm                       | 14 - 24 AWG |

Shell Size: 20    Number of Contacts: 28    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h


## Dimensions Square Flange Receptacle

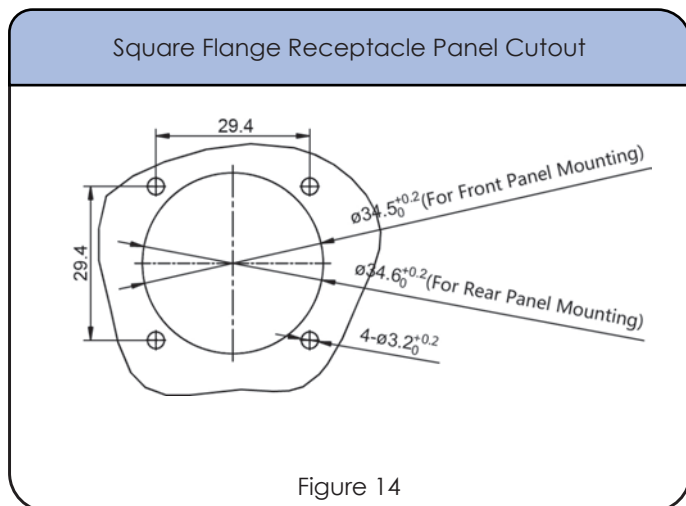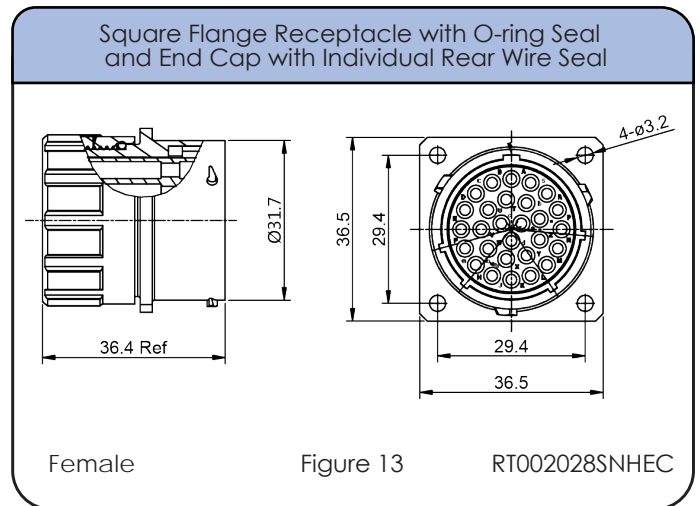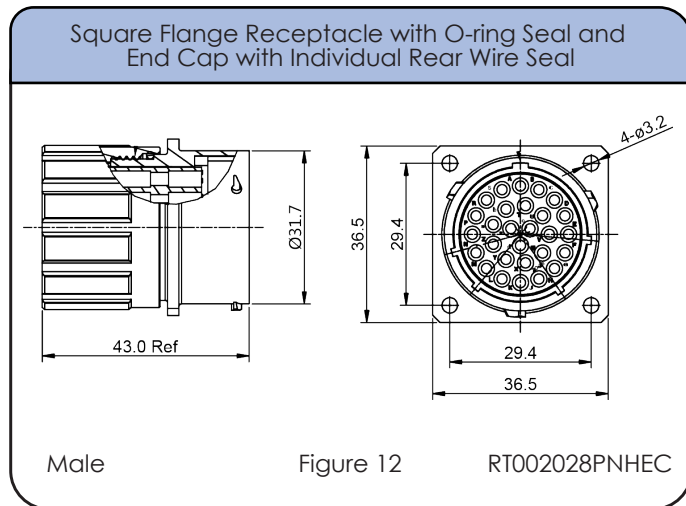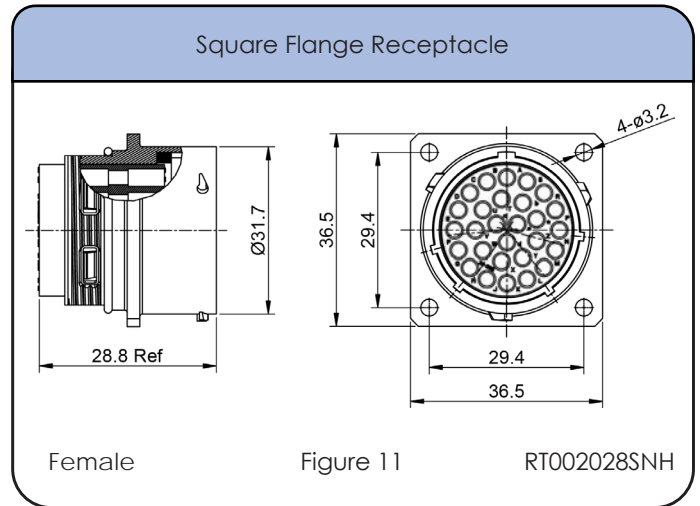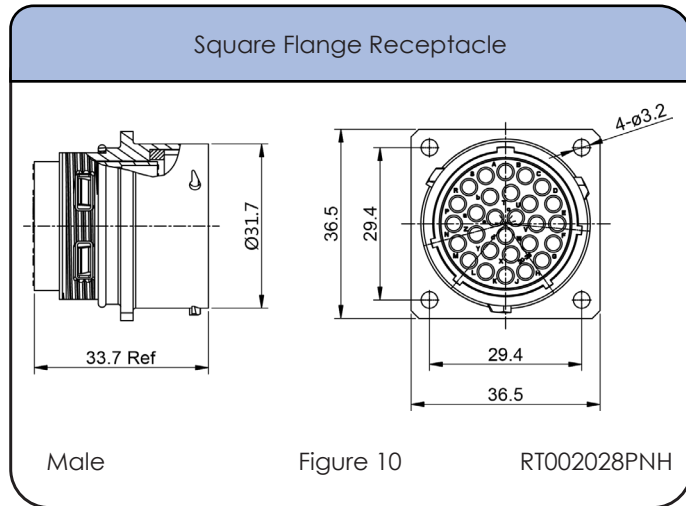



Shell Size: 20    Number of Contacts: 28    Contact Size: 16  
Sealing: IP67    Salt Spray: 48h

## Dimensions Backshell

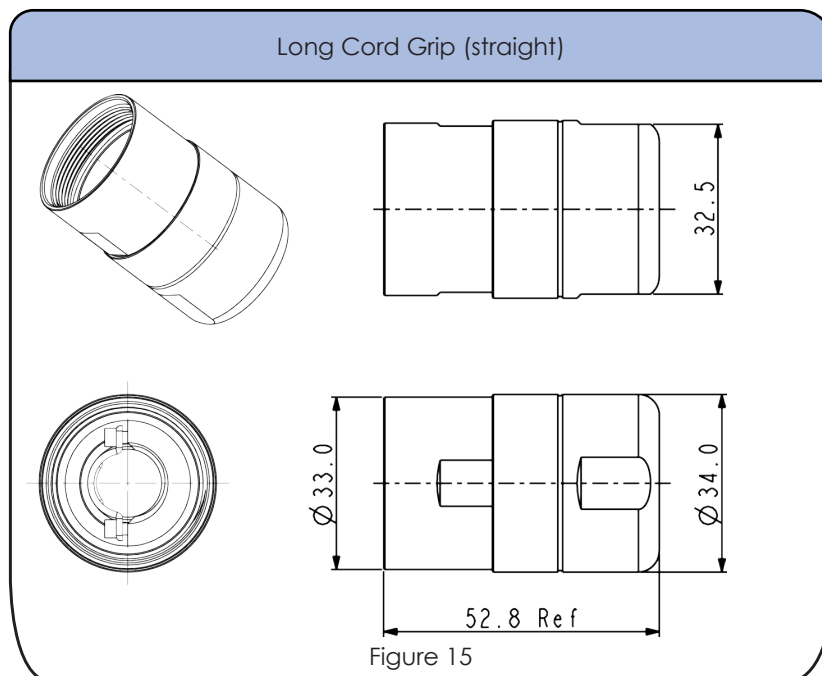

## Accessories

|  |  |   |  |
|--|--|---|--|
| <p>Locking Clip with Lanyard</p> <p>108039120</p>                              | <p>Plug Dustcap with Chain</p> <p>RT620DCG</p>         | <p>Plug Dustcap without Chain</p> <p>RT620DC</p>                                | <p>Receptacle Dustcap with Chain</p> <p>RT020DCG</p> |
| <p>Receptacle Dustcap with Nylon Cord</p> <p>RT020RL</p>                       | <p>Receptacle Dustcap without Chain</p> <p>RT020DC</p> | <p>Receptacle Dustcap without Nylon Cord, Rubber Material</p> <p>RB00011920</p> | <p>Sealing Plug</p> <p>A114017-SR</p>                |
| <p>Square Flange Receptacle Gaskets, Thickness 0.8mm (±0.2)</p> <p>RTFD20B</p> |  |   |  |

NEW!  
See  
Page  
16

Shell Size: 20  
Sealing: IP67

Number of Contacts: 28  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range | Plating    |
|-------------|------------|-------|------------|------------|
| Male        | Female     |       |            |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5    | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5    | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5    | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5    | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5    | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5    | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5    | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5    | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5    | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5    | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50    | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50    | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50    | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50    | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50    | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25    | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25    | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25    | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25    | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25    | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Crimp Tool for  
Machined Contacts



MFX-3959

Pneumatic Crimp Tool for  
Machined Contacts



MFX-3960

Shell Size: 20      Number of Contacts: 28      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Contacts (con't)



Stamped & Formed Contacts

### Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

### Tools



Contact Extraction Tool, #16 (Ø 1.6) Contact

QXRT16



Hand Tool, Stamped & Formed Contact, Size 16, 20-14AWG

MFX-3954



Crimp Die for Stamped & Formed Contact

MFX-3957

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**STEP 2**  
Choose Backshell Style

Jam Nut Receptacles



Jam Nut Receptacle Kit Including Receptacle & Contacts



**OR**  
Square Flange Receptacles



Square Flange Receptacle Kit Including Receptacle, Gasket & Contacts



Plug



Backshell



**OR**

Plug Kit Including Connector, Backshell & Contacts



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS SOLD SEPARATELY SEE PAGE 172

Shell Size: 18    Number of Contacts: 32    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

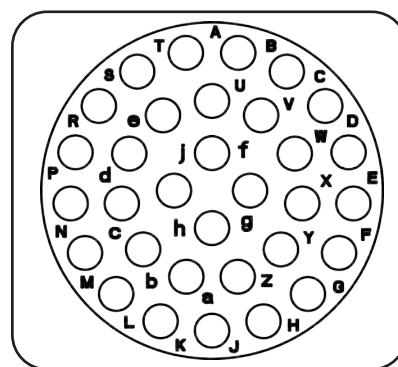

Insert Arrangement  
Pin (Male) Faceview

## Connector Part Numbers

| Part Number    |                | Connector Type   | Figure Drawings |        |
|----------------|----------------|--|-----------------|--------|
| Male           | Female         |  | Male            | Female |
| RTOW71832PNH   | RTOW71832SNH   | Jam Nut Receptacle   | 1,5             | 2,5    |
| RTOW71832PNHEC | RTOW71832SNHEC | Jam Nut Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal**       | 3,5             | 4,5    |
| RTOW71832PNH-K | RTOW71832SNH-K | Jam Nut Receptacle Kit   | 1,5             | 2,5    |
| RTOW61832PNH   | RTOW61832SNH   | Plug   | 6               | 7      |
| RTOW61832PNHEC | RTOW61832SNHEC | Plug with O-ring Seal and End Cap with Individual Rear Wire Seal**                     | 8               | 9      |
| RTOW61832PNH-K | RTOW61832SNH-K | Plug Kit   | 6               | 7      |
| RTOW01832PNH   | RTOW01832SNH   | Square Flange Receptacle   | 10,14           | 11,14  |
| RTOW01832PNHEC | RTOW01832SNHEC | Square Flange Receptacle with O-ring Seal and End Cap with Individual Rear Wire Seal** | 12,14           | 13,14  |
| RTOW01832PNH-K | RTOW01832SNH-K | Square Flange Receptacle Kit   | 10,14           | 11,14  |

Contacts supplied separately see page 172

\*\*See page 169 for the real seal wire range

## Backshells

| Part Number  | Backshell Type             | Cable Range (mm) | Figure Drawings | Shielding |
|--------------|----------------------------|------------------|-----------------|-----------|
| RTOS-18CG-S1 | Short Cord Grip (straight) | 9.0-14.5         | 15              | ✓         |
| RTOS-18CG-S2 | Short Cord Grip (straight) | 13.5-17          | 15              | ✓         |
| RTOL-18CG-S1 | Long Cord Grip (straight)  | 9.0-14.5         | 16              | ✓         |
| RTOL-18CG-S2 | Long Cord Grip (straight)  | 13.5-17          | 16              | ✓         |






\*Connector parts with part numbers ending in EC (with an end cap) were not available for submittal at the time of UL certification.

Shell Size: 18  
Sealing: IP67

Number of Contacts: 32  
Salt Spray: 48h

Contact Size: 20





## Dimensions Jam Nut Receptacle

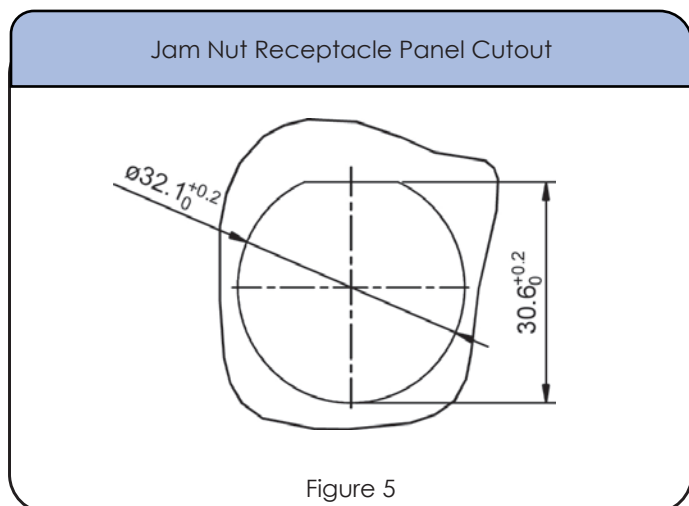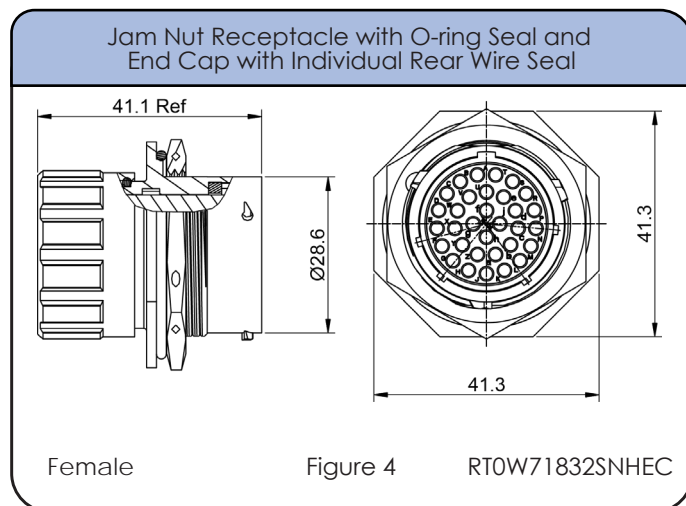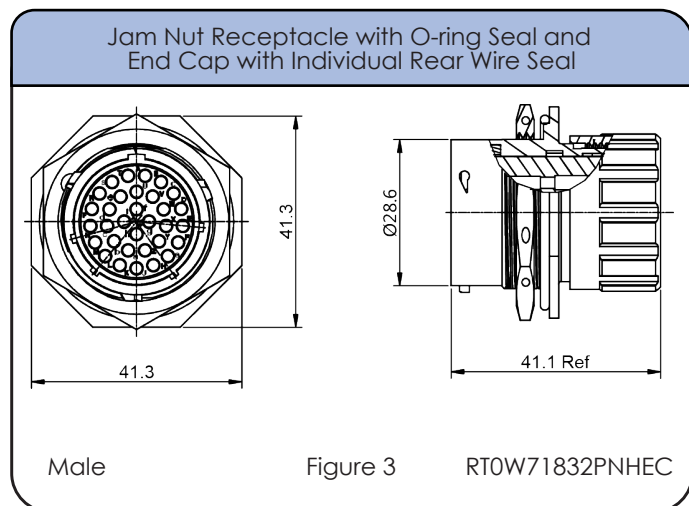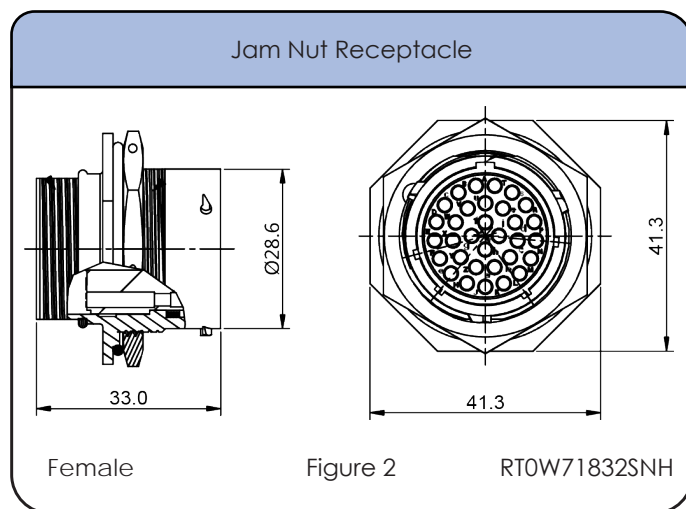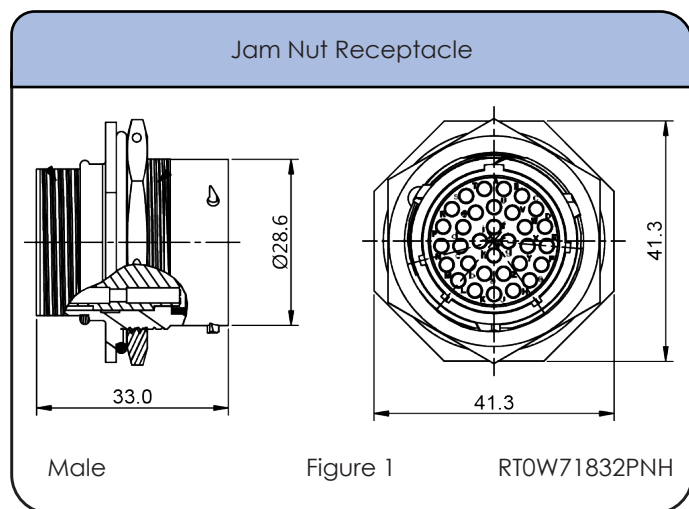



Shell Size: 18      Number of Contacts: 32      Contact Size: 20  
Sealing: IP67      Salt Spray: 48h

### Dimensions Plug


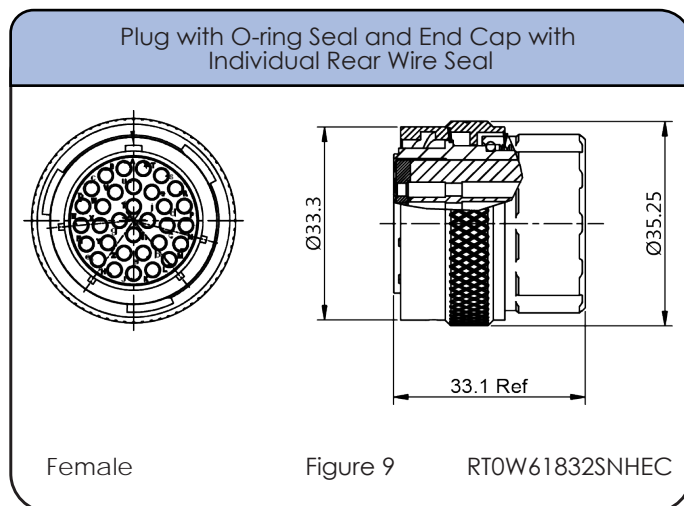
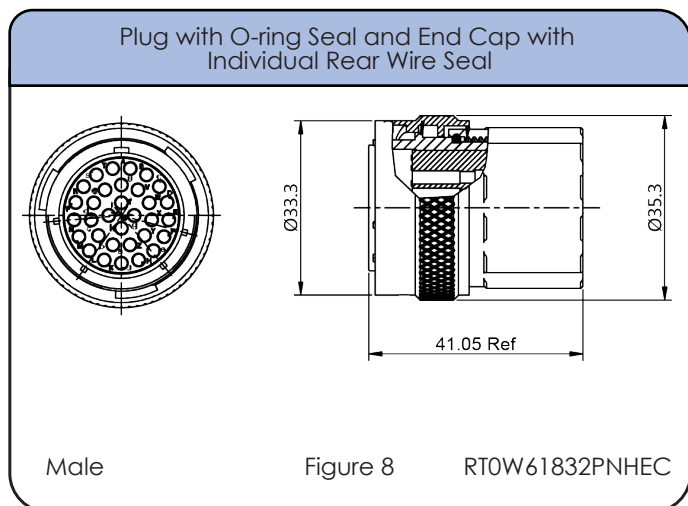
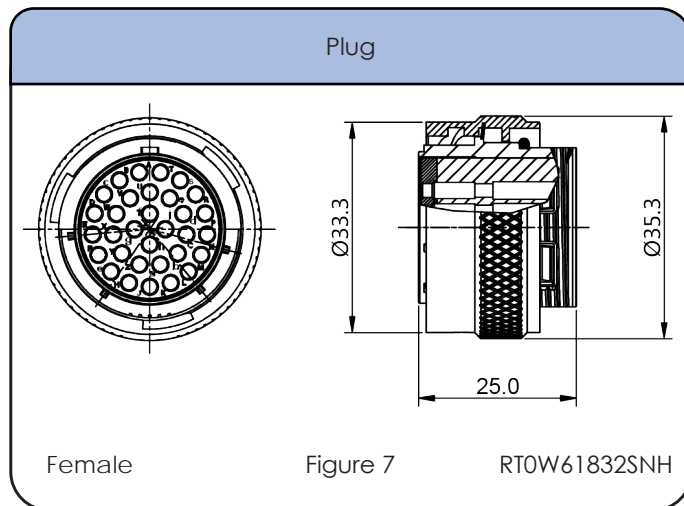
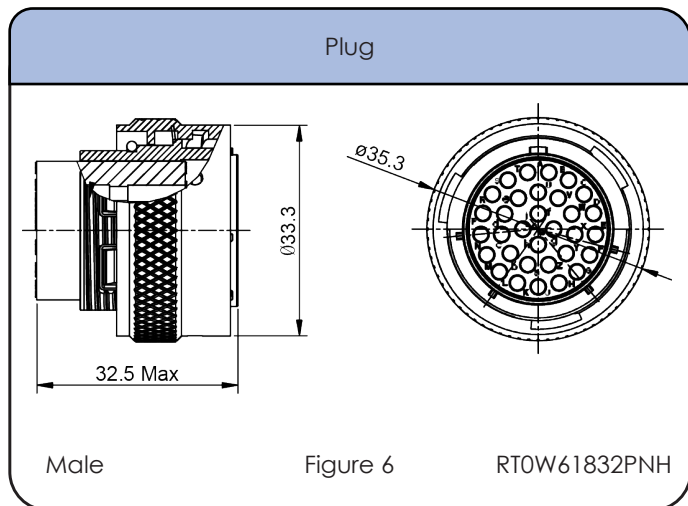


### Individual Sealing Wire Range

| Contact Size | Insulation Overall Diameter (min-max) | Wire Range  |
|--------------|---------------------------------------|-------------|
| 20           | Ø1.6mm - Ø2.6mm                       | 20 - 30 AWG |



Shell Size: 18      Number of Contacts: 32      Contact Size: 20  
 Sealing: IP67      Salt Spray: 48h

### Dimensions Square Flange Receptacle

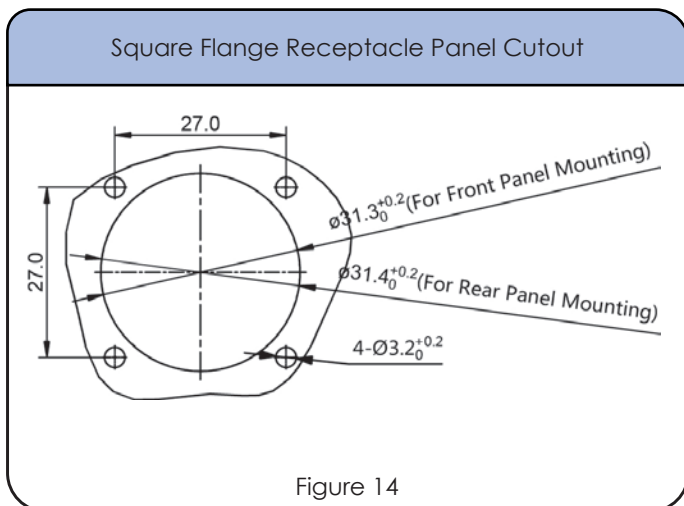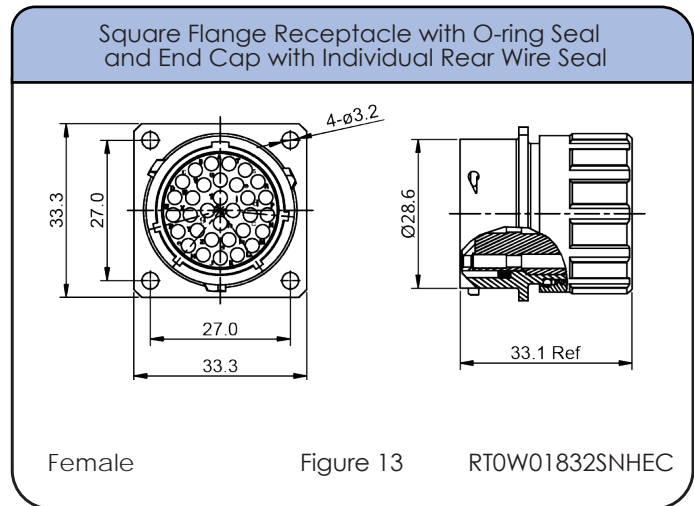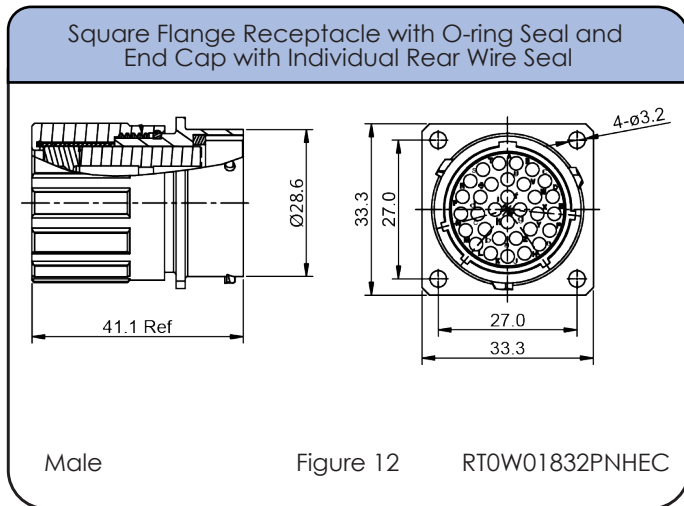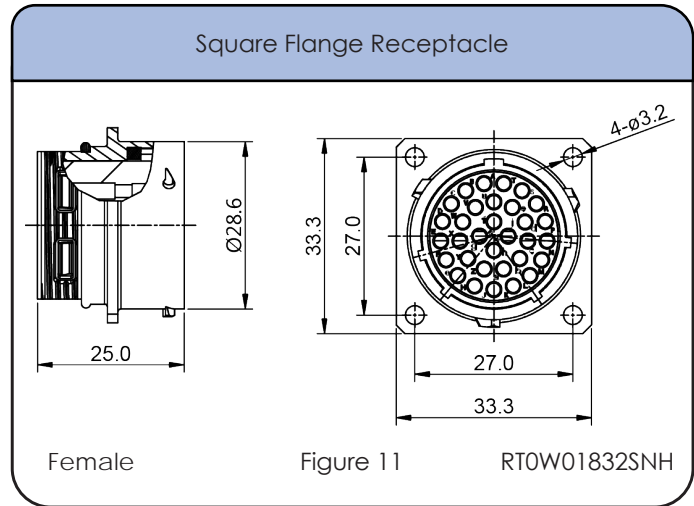
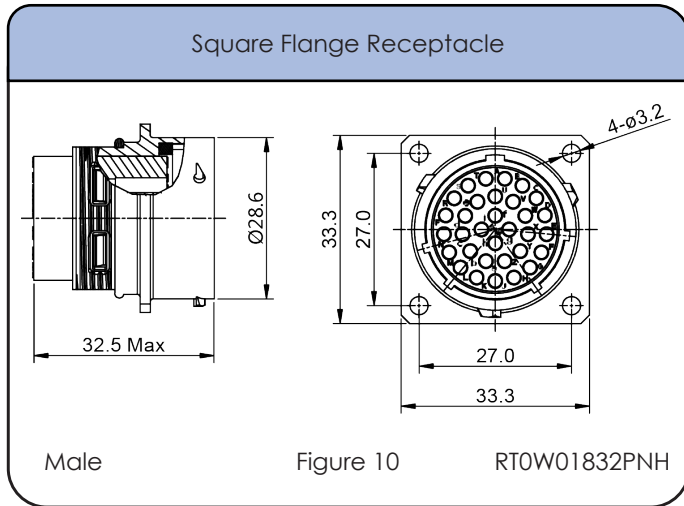


Shell Size: 18    Number of Contacts: 32    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

## Dimensions Backshell

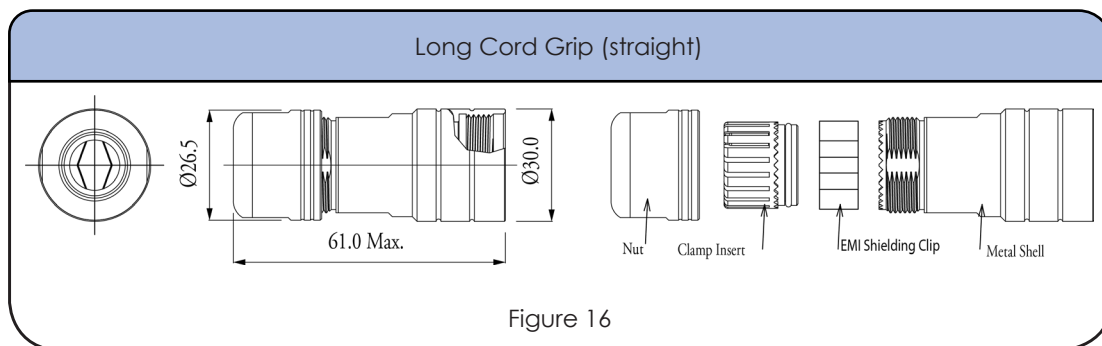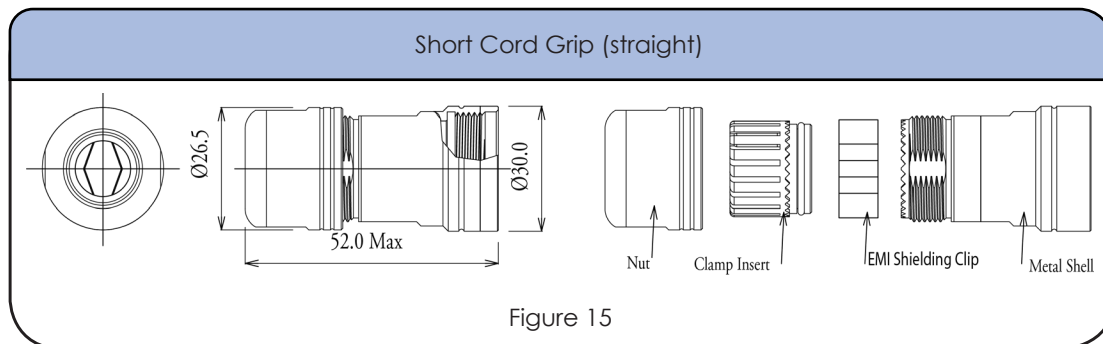

## Accessories



NEW!  
See  
Page  
16

Shell Size: 18  
Sealing: IP67

Number of Contacts: 32  
Salt Spray: 48h

Contact Size: 20

## Contacts



## Crimp Contacts, Machined (7.5A Max)

| PART NUMBER |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| MALE        | FEMALE     |       |                               |            |
| MP20W23F    | MS20W23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20W23G5   | MS20W23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20W23G10  | MS20W23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20W23G15  | MS20W23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20W23G30  | MS20W23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24W23F    | MS24W23F   | 26-24 | .13-.25                       | Gold Flash |
| MP24W23G5   | MS24W23G5  | 26-24 | .13-.25                       | Gold 5μ"   |
| MP24W23G10  | MS24W23G10 | 26-24 | .13-.25                       | Gold 10μ"  |
| MP24W23G15  | MS24W23G15 | 26-24 | .13-.25                       | Gold 15μ"  |
| MP24W23G30  | MS24W23G30 | 26-24 | .13-.25                       | Gold 30μ"  |
| MP28W23F    | MS28W23F   | 30-28 | .05-.08                       | Gold Flash |
| MP28W23G5   | MS28W23G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| MP28W23G10  | MS28W23G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| MP28W23G15  | MS28W23G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| MP28W23G30  | MS28W23G30 | 30-28 | .05-.08                       | Gold 30μ"  |

## Tools



Shell Size: 18    Number of Contacts: 32    Contact Size: 20  
Sealing: IP67    Salt Spray: 48h

## Contacts (con't)



Stamped & Formed Contacts

## Crimp Contacts, Stamped & Formed (5A Max)

| PART NUMBER |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| MALE        | FEMALE    |       |                               |            |
| SP20W2F     | SS20W2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20W2G5    | SS20W2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20W2G10   | SS20W2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20W2G15   | SS20W2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20W2G30   | SS20W2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24W2F     | SS24W2F   | 26-24 | .14-.25                       | Gold Flash |
| SP24W2G5    | SS24W2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24W2G10   | SS24W2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24W2G15   | SS24W2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24W2G30   | SS24W2G30 | 26-24 | .14-.25                       | Gold 30μ"  |
| SP28W2F     | SS28W2F   | 30-28 | .05-.08                       | Gold Flash |
| SP28W2G5    | SS28W2G5  | 30-28 | .05-.08                       | Gold 5μ"   |
| SP28W2G10   | SS28W2G10 | 30-28 | .05-.08                       | Gold 10μ"  |
| SP28W2G15   | SS28W2G15 | 30-28 | .05-.08                       | Gold 15μ"  |
| SP28W2G30   | SS28W2G30 | 30-28 | .05-.08                       | Gold 30μ"  |


## Tools



Shell Size: 24    Number of Contacts: 48    Contact Size: 16  
 Sealing: IP67    Salt Spray: 48h

### eco | mate<sup>®</sup> rm Standard Products

- Suitable For Indoor and Outdoor Applications
- EMI/RMI Shielding Capability with Appropriate Backshell
- Operating Temperature: -40°C to +105°C
- 500 Mating Cycles
- Contacts and Cord Grips Ordered Separately
- UL ECBT2 Certified\*

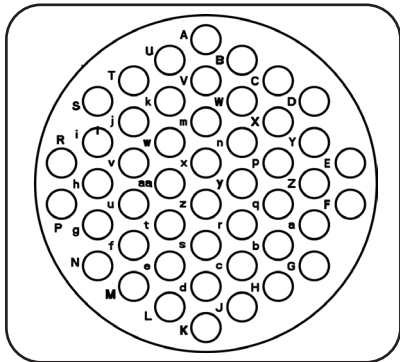

Insert Arrangement  
 Pin (Male) Faceview

An upgraded silicone seal is available for all connector parts. Please add "03" to the end of the part number when ordering. Operating Temperature: -40°C to +125°C. Not available in kits.

**STEP 1**  
Choose Receptacle Style

**STEP 2**  
Choose Plug Style

**Square Flange Receptacles**

RT002448PNH  
RT002448SNH

**Plug**

RT062448PNH  
RT062448SNH

**Accessories**

Sealing Plug

A114017-SR

Square Flange Receptacle Gaskets, Thickness 1.0mm (±0.2)

RTFD24B

Locking Clip with Lanyard

108039122

NEW!  
 See  
 Page  
 16

### Connector Part Numbers

| Part Number |             | Connector Type           | Figure Drawings |        |
|-------------|-------------|--------------------------|-----------------|--------|
| Male        | Female      |                          | Male            | Female |
| RT062448PNH | RT062448SNH | Plug                     | 1               | 2      |
| RT002448PNH | RT002448SNH | Square Flange Receptacle | 3,5             | 4,5    |

Contacts supplied separately see page 176



CONTACTS SOLD SEPARATELY SEE PAGE 176






Shell Size: 24    Number of Contacts: 48  
Sealing: IP67    Salt Spray: 48h

Contact Size: 16

### Dimensions Plug

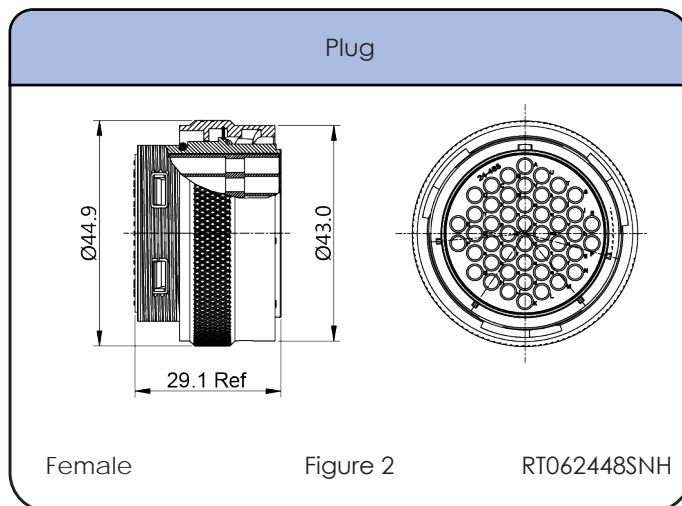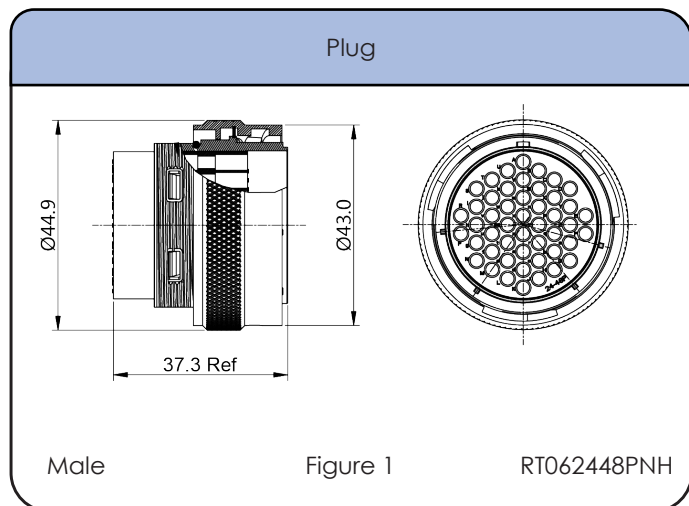

### Dimensions Square Flange Receptacle

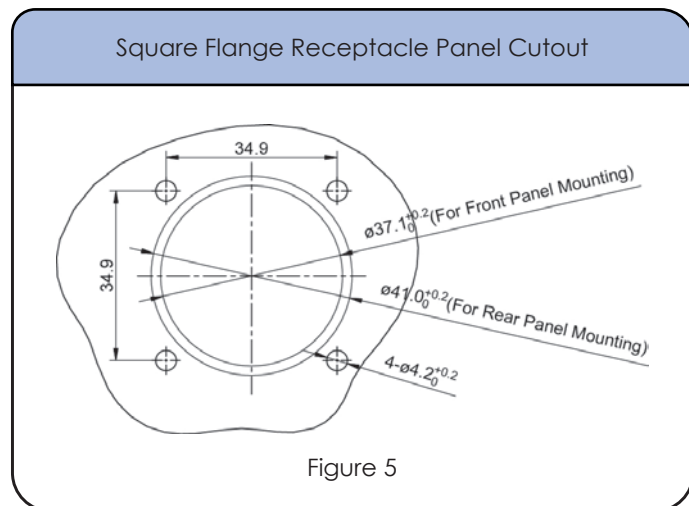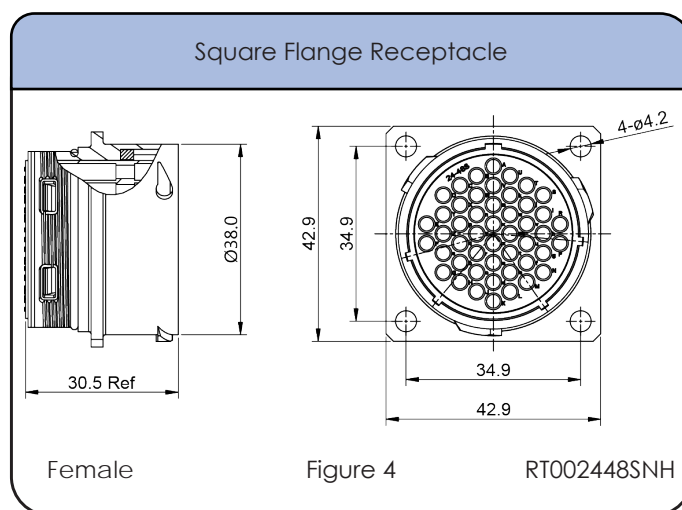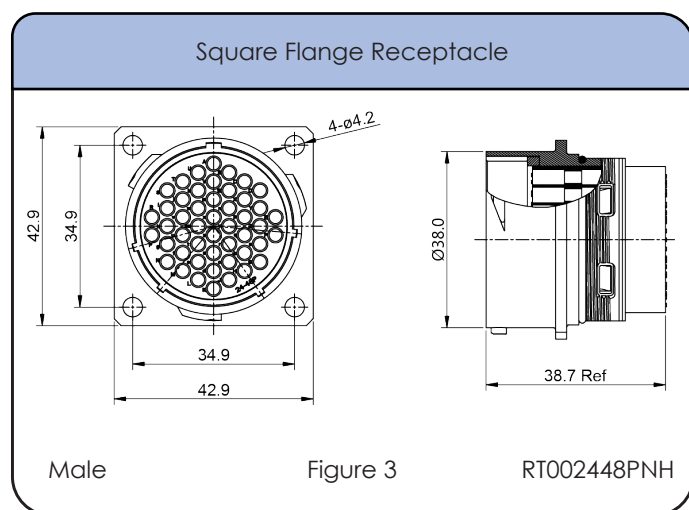

Shell Size: 24  
Sealing: IP67

Number of Contacts: 48  
Salt Spray: 48h

Contact Size: 16

## Contacts



## Crimp Contacts, Machined

| Part Number |            | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|------------|-------|-------------------------------|------------|
| Male        | Female     |       |                               |            |
| MP14M23F    | MS14M23F   | 14    | 2.0-2.5                       | Gold Flash |
| MP14M23G5   | MS14M23G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| MP14M23G10  | MS14M23G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| MP14M23G15  | MS14M23G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| MP14M23G30  | MS14M23G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| MP16M23F    | MS16M23F   | 18-16 | .75-1.5                       | Gold Flash |
| MP16M23G5   | MS16M23G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| MP16M23G10  | MS16M23G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| MP16M23G15  | MS16M23G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| MP16M23G30  | MS16M23G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| MP20M23F    | MS20M23F   | 22-20 | .34-.50                       | Gold Flash |
| MP20M23G5   | MS20M23G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| MP20M23G10  | MS20M23G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| MP20M23G15  | MS20M23G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| MP20M23G30  | MS20M23G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| MP24M23F    | MS24M23F   | 26-24 | .14-.25                       | Gold Flash |
| MP24M23G5   | MS24M23G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| MP24M23G10  | MS24M23G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| MP24M23G15  | MS24M23G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| MP24M23G30  | MS24M23G30 | 26-24 | .14-.25                       | Gold 30μ"  |

## Tools

Contact Extraction Tool,  
#16 (Ø 1.6) Contact



QXRT16

Hand Crimp Tool  
for Machined Contacts



MFX-3959

Pneumatic Crimp Tool for  
Machined Contacts



MFX-3960

Shell Size: 24      Number of Contacts: 48      Contact Size: 16  
Sealing: IP67      Salt Spray: 48h

### Contacts (con't)



Stamped & Formed Contacts

### Crimp Contacts, Stamped & Formed

| Part Number |           | AWG   | Wire Range (mm <sup>2</sup> ) | Plating    |
|-------------|-----------|-------|-------------------------------|------------|
| Male        | Female    |       |                               |            |
| SP14M2F     | SS14M2F   | 14    | 2.0-2.5                       | Gold Flash |
| SP14M2G5    | SS14M2G5  | 14    | 2.0-2.5                       | Gold 5μ"   |
| SP14M2G10   | SS14M2G10 | 14    | 2.0-2.5                       | Gold 10μ"  |
| SP14M2G15   | SS14M2G15 | 14    | 2.0-2.5                       | Gold 15μ"  |
| SP14M2G30   | SS14M2G30 | 14    | 2.0-2.5                       | Gold 30μ"  |
| SP16M2F     | SS16M2F   | 18-16 | .75-1.5                       | Gold Flash |
| SP16M2G5    | SS16M2G5  | 18-16 | .75-1.5                       | Gold 5μ"   |
| SP16M2G10   | SS16M2G10 | 18-16 | .75-1.5                       | Gold 10μ"  |
| SP16M2G10   | SS16M2G15 | 18-16 | .75-1.5                       | Gold 15μ"  |
| SP16M2G30   | SS16M2G30 | 18-16 | .75-1.5                       | Gold 30μ"  |
| SP20M2F     | SS20M2F   | 22-20 | .34-.50                       | Gold Flash |
| SP20M2G5    | SS20M2G5  | 22-20 | .34-.50                       | Gold 5μ"   |
| SP20M2G10   | SS20M2G10 | 22-20 | .34-.50                       | Gold 10μ"  |
| SP20M2G15   | SS20M2G15 | 22-20 | .34-.50                       | Gold 15μ"  |
| SP20M2G30   | SS20M2G30 | 22-20 | .34-.50                       | Gold 30μ"  |
| SP24M2F     | SS24M2F   | 22-20 | .14-.25                       | Gold Flash |
| SP24M2G5    | SS24M2G5  | 26-24 | .14-.25                       | Gold 5μ"   |
| SP24M2G10   | SS24M2G10 | 26-24 | .14-.25                       | Gold 10μ"  |
| SP24M2G15   | SS24M2G15 | 26-24 | .14-.25                       | Gold 15μ"  |
| SP24M2G30   | SS24M2G30 | 26-24 | .14-.25                       | Gold 30μ"  |

### Tools



Contact Extraction Tool,  
#16 (Ø 1.6) Contact

QXRT16



Hand Tool, Stamped & Formed  
Contact, Size 16, 20-14AWG

MFX-3954



Crimp Die for Stamped  
& Formed Contact

MFX-3957

STEP 1  
Choose Receptacle Style

STEP 2  
Choose Plug Style

Square Flange  
Receptacles



RTHP0121PN-16C



RTHP0121PN-H1

Plug



RTHP6121SNH-16S2



RTHP6121SNH16-BS2



Crimp Barrel Contact



Flat Hole Tail Contact  
(receptacle only)



Screw Tail Contact  
(receptacle only)




SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS INCLUDED SEE PAGE 179

Shell Size: 12    Number of Contacts: 1    Contact Size: 3.6mm  
Sealing: IP67    Salt Spray: 48h

### High Amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> Technology

- Single Pole High Power Arrangements
- 3.6mm Contact Size
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- Operating Voltage: 630V
- Current Rating at 25°C: 86A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

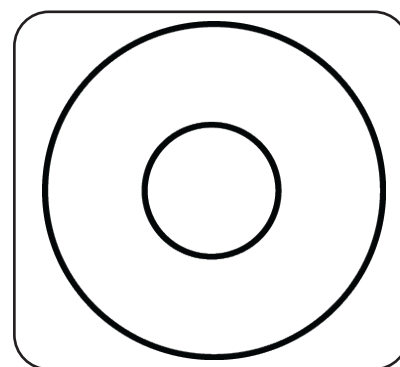

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers

| Connector Part Number | Connector Type  | Wire Range (mm <sup>2</sup> ) | Amps | Contact     |                      |     |         | Figure Drawings |
|-----------------------|---|-------------------------------|------|-------------|----------------------|-----|---------|-----------------|
|                       |   |                               |      | Part Number | Type                 | AWG | Plating |                 |
| RTHP6121SNH-16S2      | Female Plug Straight, Crimp, with Long Shielded Backshell | 10-16                         | 86   | MS6ARS8S    | Crimp Barrel, Female | 8   | Silver  | 1               |
| RTHP6121SNH16-BS2     | Female Plug with 90° Shielded Backshell                   | 10-16                         | 86   | MS6ARS8S    | Crimp Barrel, Female | 8   | Silver  | 2               |
| RTHP0121PN-16C        | Male Square Flange Receptacle Crimp                       | 10-16                         | 86   | MP6ARS8S    | Crimp Barrel, Male   | 8   | Silver  | 3,5             |
| RTHP0121PN-H1         | Male Square Flange Receptacle Flat Tail                   | N/A                           | 86   | HPAHS       | Flathole Tail, Male  | 8   | Silver  | 3,5             |



Contacts included. See chart for specific requirements

Shell Size: 12  
Sealing: IP67

Number of Contacts: 1  
Salt Spray: 48h

Contact Size: 3.6mm

## Dimensions Plug

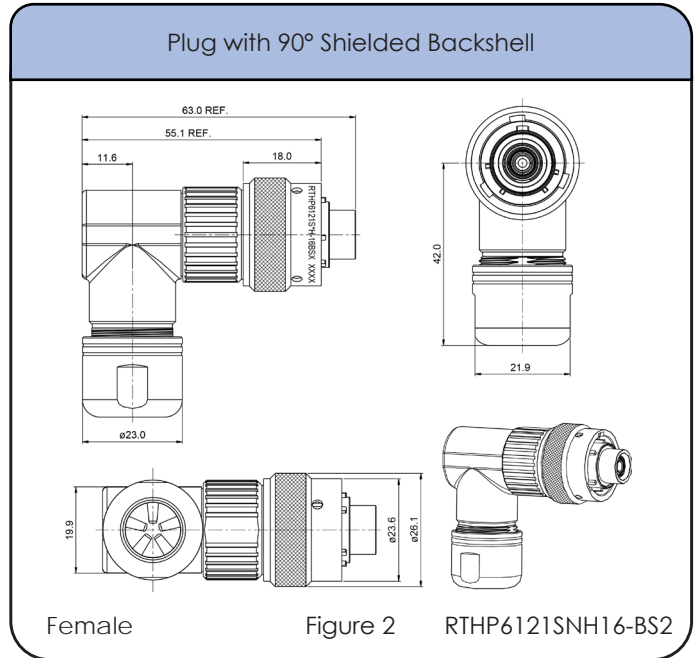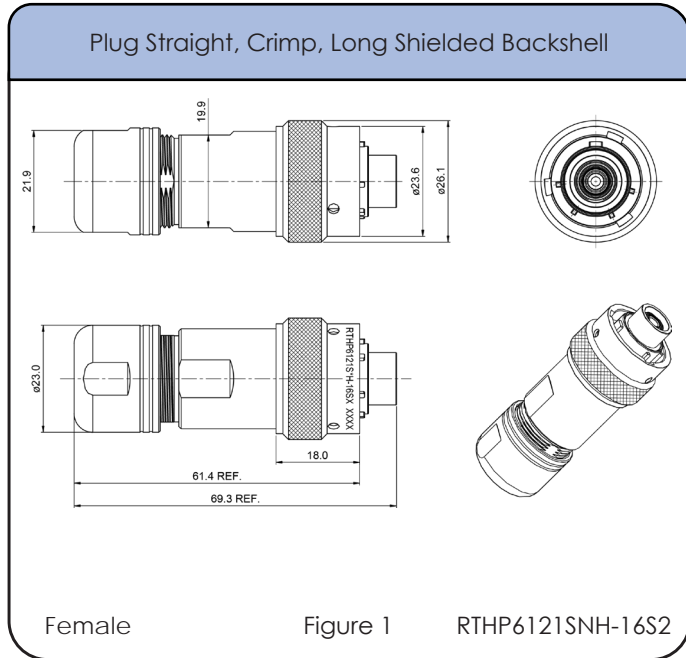




## Tools





Shell Size: 12    Number of Contacts: 1    Contact Size: 3.6mm  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

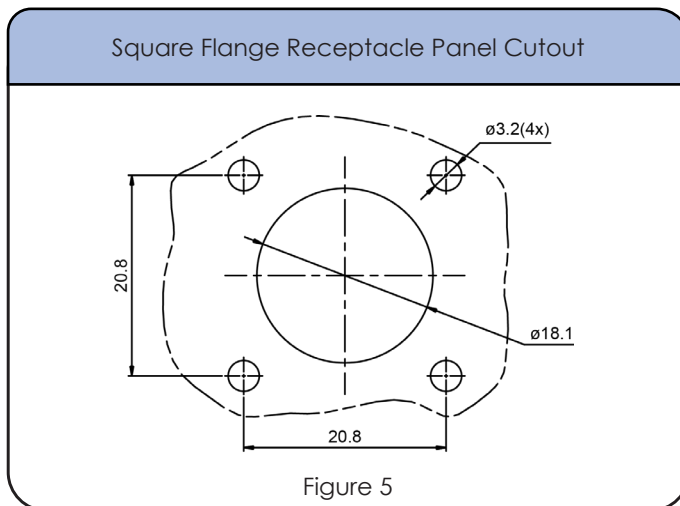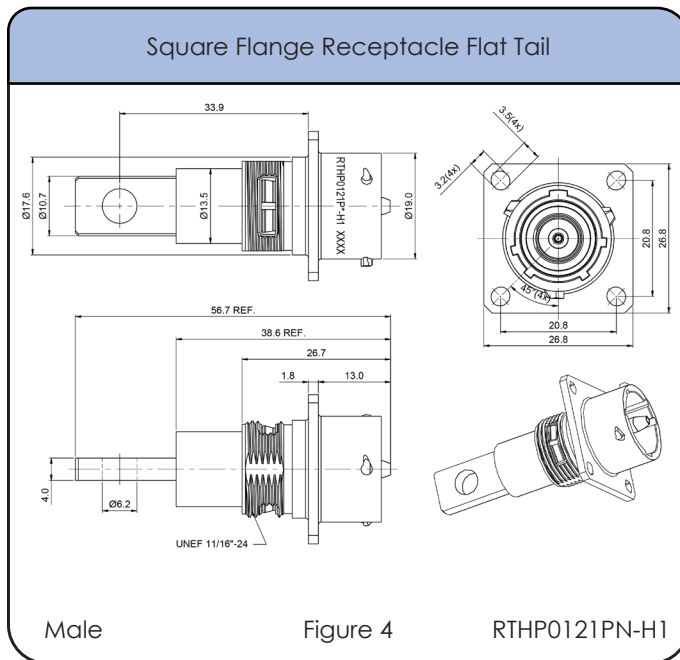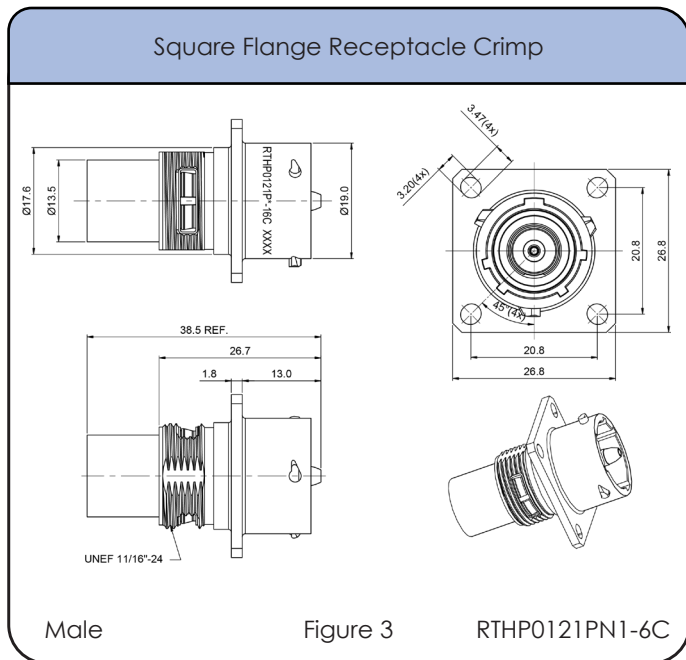

STEP 1  
Choose Receptacle Style

STEP 2  
Choose Plug Style

Square Flange Receptacles



Plug



Crimp Barrel Contact



Flat Hole Tail Contact  
(receptacle only)



Screw Tail Contact  
(receptacle only)




SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS INCLUDED SEE PAGE 183

Shell Size: 14    Number of Contacts: 1    Contact Size: 6mm  
Sealing: IP67    Salt Spray: 48h

### High Amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> Technology

- Single Pole High Power Arrangements
- 6mm Contact Size
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- Operating Voltage: 630V
- Current Rating at 25°C: 120A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

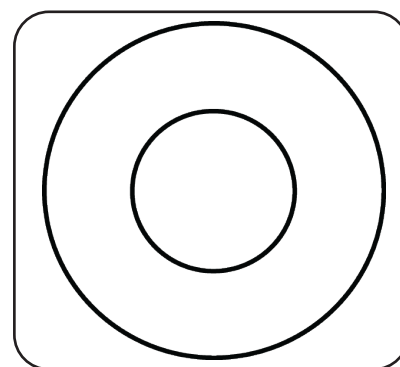

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers





| Connector Part Number | Connector Type   | Wire Range (mm <sup>2</sup> ) | Amps | Contact     |                      |     |         | Figure Drawings |
|-----------------------|--|-------------------------------|------|-------------|----------------------|-----|---------|-----------------|
|                       |  |                               |      | Part Number | Type                 | AWG | Plating |                 |
| RTHP6141SNH25-EC      | Female Plug with Unshielded Short Backshell and End Cap with Individual Rear Wire Seal | 20-25                         | 120  | HS25BCS     | Crimp Barrel, Female | 4   | Silver  | 1               |
| RTHP6141SNH25-PS2     | Female Plug with Short Shielded Backshell  | 20-25                         | 120  | HS25BCS     | Crimp Barrel, Female | 4   | Silver  | 2               |
| RTHP6141SNH-25S2      | Female Plug Straight, Crimp, Long Shielded Backshell                                   | 20-25                         | 120  | HS25BCS     | Crimp Barrel, Female | 4   | Silver  | 3               |
| RTHP6141SNH25-BS2     | Female Plug with 90° Shielded Backshell  | 20-25                         | 120  | HS25BCS     | Crimp Barrel, Female | 4   | Silver  | 4               |
| RTHP0141PN-25C        | Male Square Flange Receptacle Crimp  | 20-25                         | 120  | HP25BCS     | Crimp Barrel, Male   | 4   | Silver  | 5,8             |
| RTHP0141PN-H1         | Male Square Flange Receptacle Flat Tail  | N/A                           | 120  | HPBHS       | Flathole Tail, Male  | 4   | Silver  | 6,8             |
| RTHP0141PN-M1         | Male Square Flange Receptacle with Screw Tail  | N/A                           | 120  | HPBSS       | Screw Tail, Male     | 4   | Silver  | 7,8             |

Contacts included. See chart for specific requirements

Shell Size: 14      Number of Contacts: 1  
 Sealing: IP67      Salt Spray: 48h





Contact Size: 6mm

## Dimensions Plug

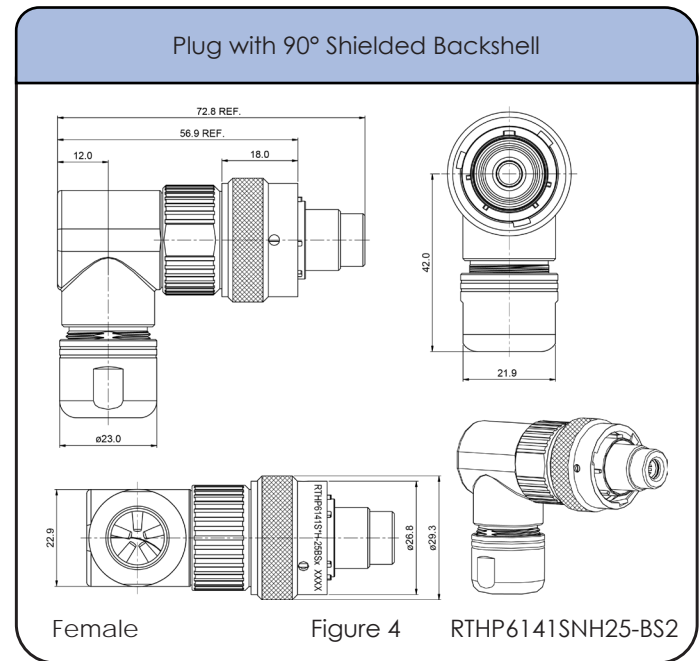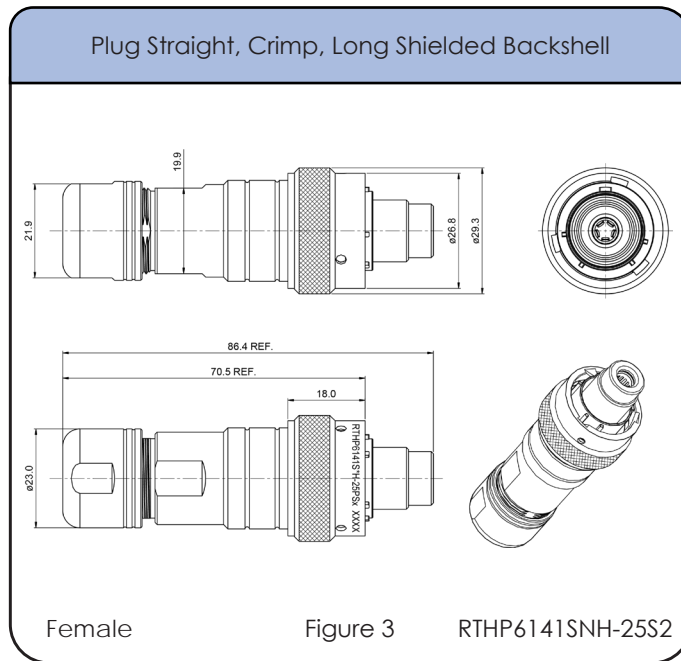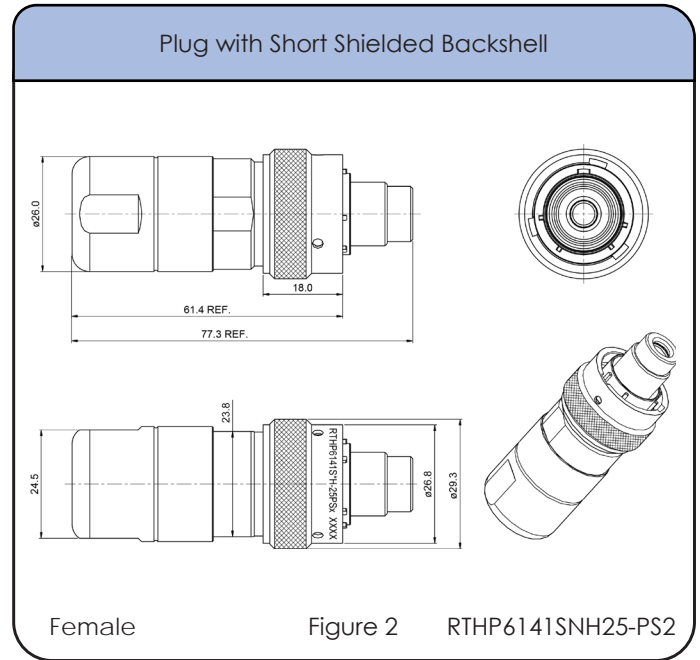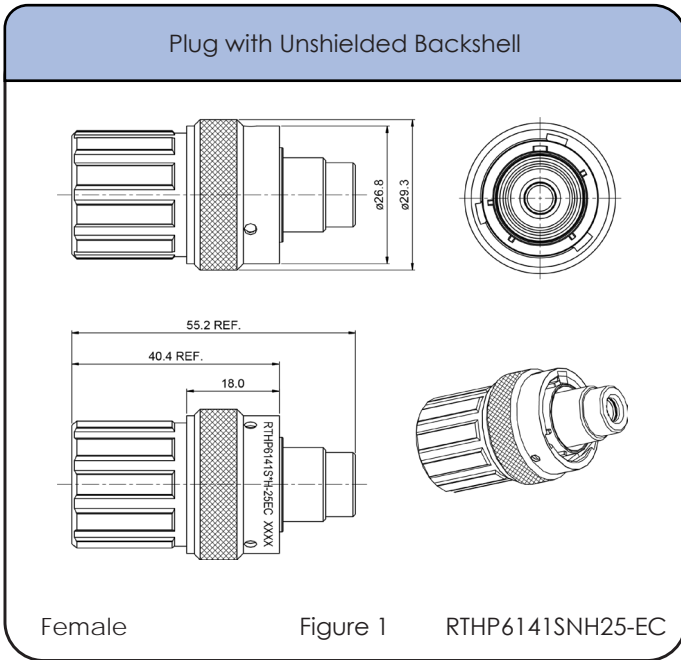

Shell Size: 14    Number of Contacts: 1    Contact Size: 6mm  
Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle

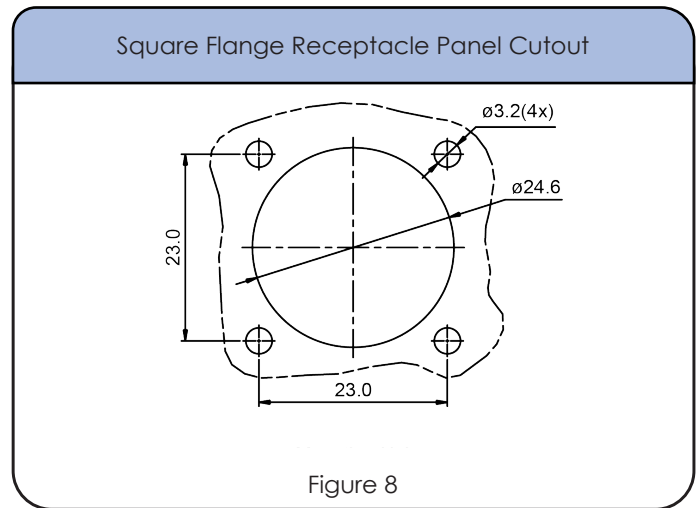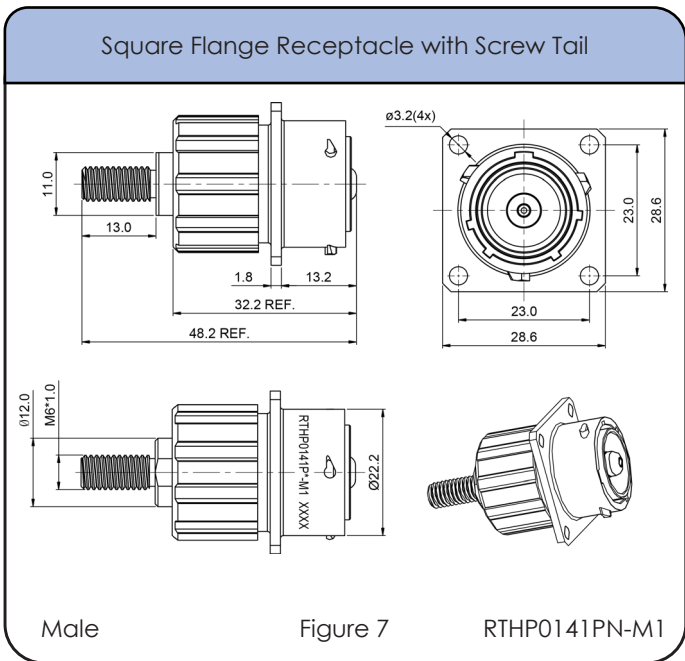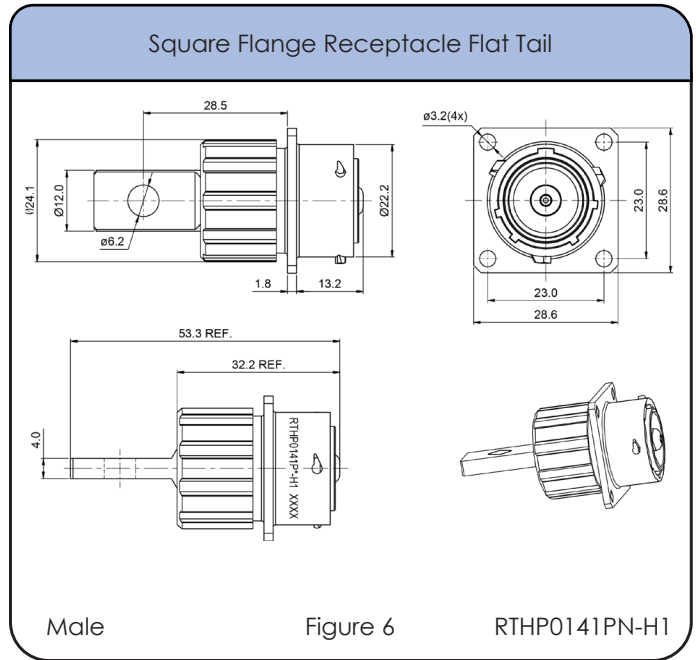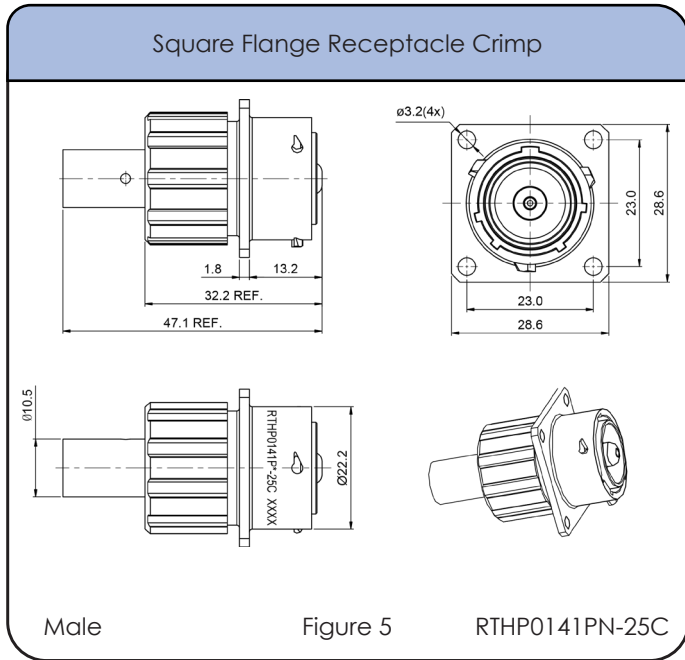

STEP 1  
Choose Receptacle Style

STEP 2  
Choose Plug Style

Square Flange Receptacles

Plug



RTHP0161PN-35C



RTHP0161PN-50C



RTHP0161PN-H1



RTHP0161PN-M1



RTHP6161SNH25-PS3



RTHP6161SNH35-PS2



RTHP6161SNH50-PS2



RTHP6161SNH-35S2



Crimp Barrel Contact



Flat Hole Tail Contact  
(receptacle only)



Screw Tail Contact  
(receptacle only)



SEE TABLE ON NEXT PAGE FOR PART DETAILS


CONTACTS INCLUDED SEE PAGE 187



Shell Size: 16    Number of Contacts: 1    Contact Size: 8mm  
Sealing: IP67    Salt Spray: 48h

### High Amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> Technology

- Single Pole High Power Arrangements
- 8mm Contact Size
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- Operating Voltage: 630V
- Current Rating at 25°C: 180A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

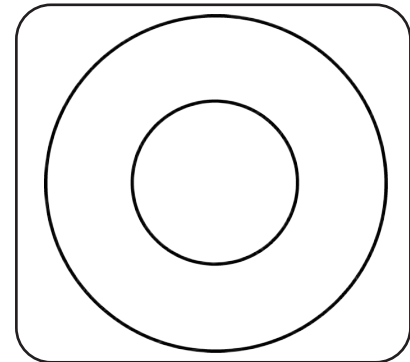

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers

| Connector Part Number | Connector Type                                       | Wire Range (mm <sup>2</sup> ) | Amps | Contact     |                      |     |         | Figure Drawings |
|-----------------------|--|-------------------------------|------|-------------|----------------------|-----|---------|-----------------|
|                       |  |                               |      | Part Number | Type                 | AWG | Plating |                 |
| RTHP6161SNH25-PS3     | Female Plug with Short Shielded Backshell            | 20-25                         | 120  | HS25CCS     | Crimp Barrel, Female | 4   | Silver  | 1               |
| RTHP6161SNH35-PS2     | Female Plug with Short Shielded Backshell            | 30-35                         | 130  | HS35CCS     | Crimp Barrel, Female | 2   | Silver  | 2               |
| RTHP6161SNH50-PS2     | Female Plug with Short Shielded Backshell            | 45-50                         | 180  | HS50CCS     | Crimp Barrel, Female | 2   | Silver  | 3               |
| RTHP6161SNH-35S2      | Female Plug Straight, Crimp, Long Shielded Backshell | 30-35                         | 130  | HS35CCS     | Crimp Barrel, Female | 2   | Silver  | 4               |
| RTHP0161PN-35C        | Male Square Flange Receptacle Crimp                  | 30-35                         | 130  | HP35CCS     | Crimp Barrel, Male   | 2   | Silver  | 5,9             |
| RTHP0161PN-50C        | Male Square Flange Receptacle with Crimp             | 40-50                         | 130  | HP50CCS     | Crimp Barrel, Male   | 2   | Silver  | 6,9             |
| RTHP0161PN-H1         | Male Square Flange Receptacle Flat Tail              | N/A                           | 180  | HPCHS       | Flathole Tail, Male  | N/A | Silver  | 7,9             |
| RTHP0161PN-M1         | Male Square Flange Receptacle with Screw Tail        | N/A                           | 180  | HPCSS       | Screw Tail, Male     | N/A | Silver  | 8,9             |





Contacts included. See chart for specific requirements

Shell Size: 16  
Sealing: IP67

Number of Contacts: 1  
Salt Spray: 48h






Contact Size: 8mm

## Dimensions Plug

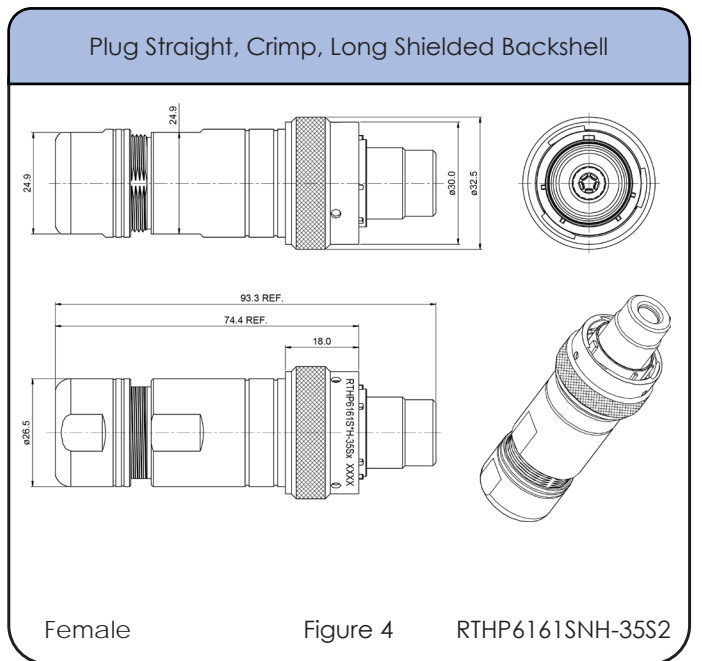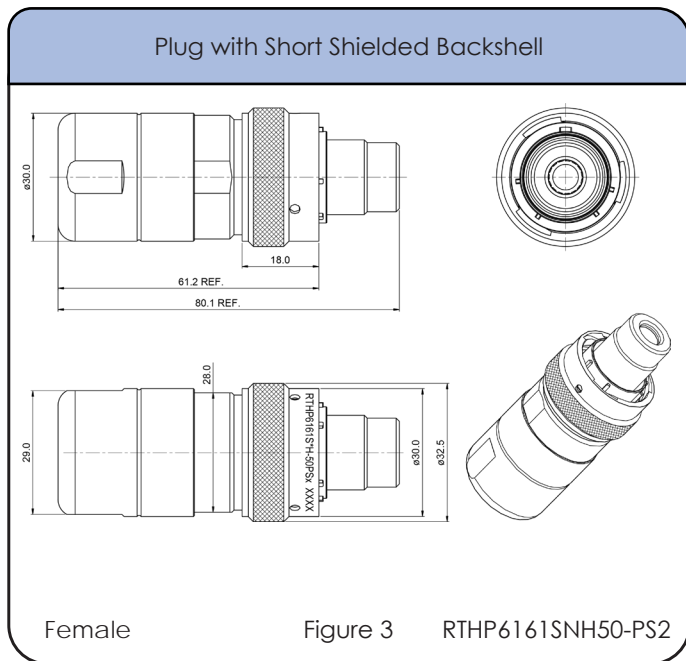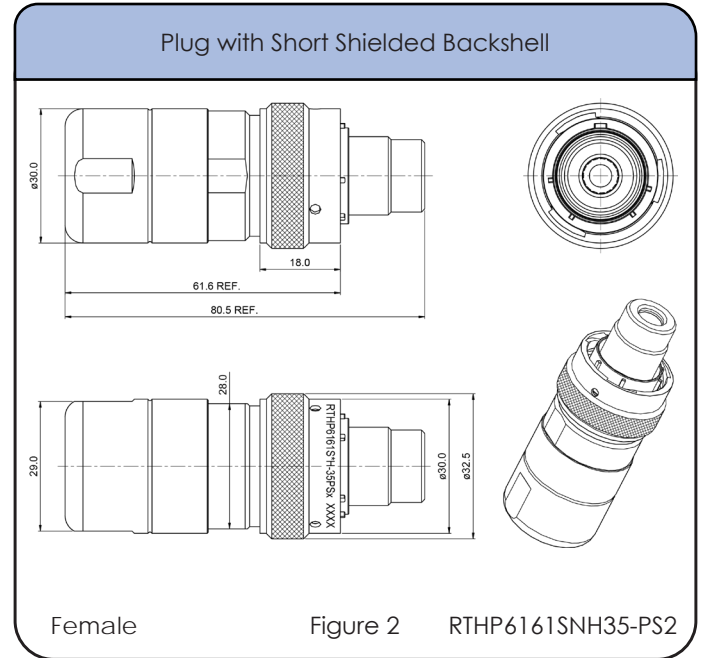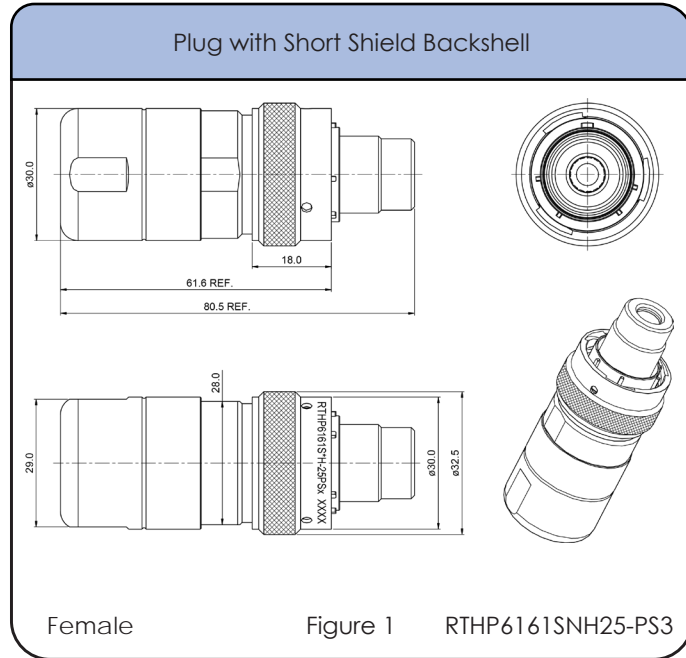

Shell Size: 16    Number of Contacts: 1    Contact Size: 8mm  
Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

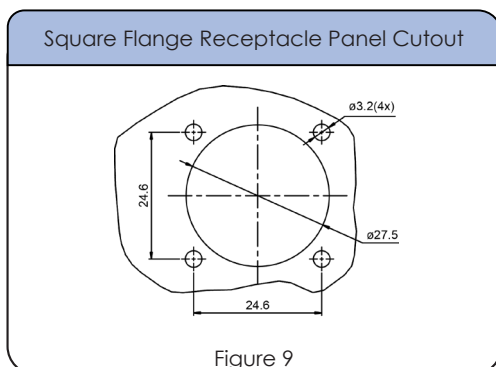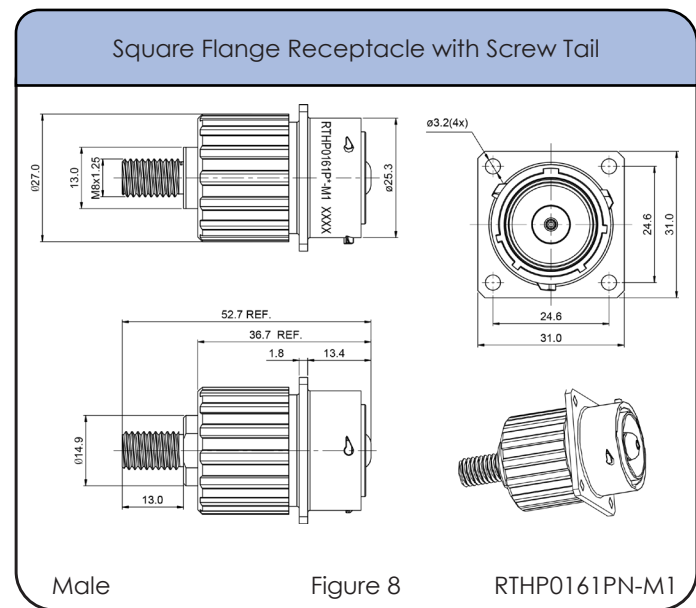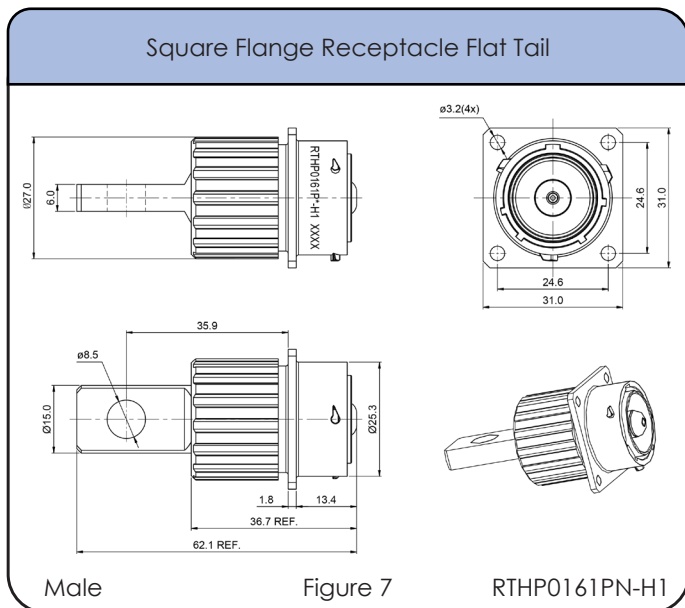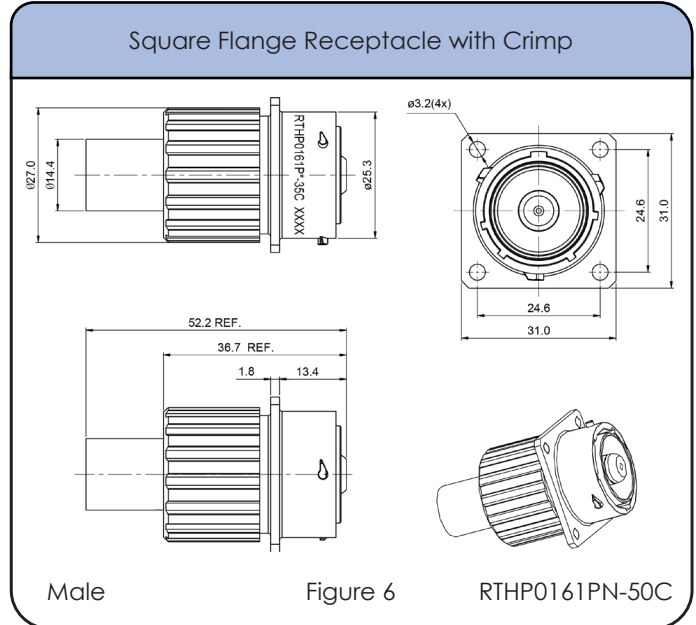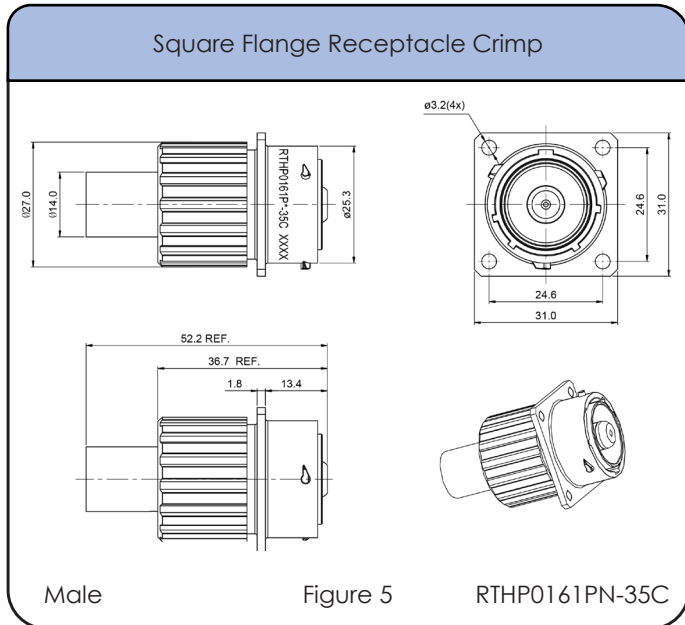

STEP 1  
Choose Receptacle Style

STEP 2  
Choose Plug Style

Square Flange  
Receptacles



RTHP0201PN-50C



RTHP0201PN-70C



RTHP0201PN-95C



RTHP0201PN-H1



RTHP0201PN-M1

Plug



RTHP6201SNH25-PS5



RTHP6201SNH35-PS2



RTHP6201SNH50-PS2



RTHP6201SNH70-PS1



RTHP6201SNH70-PS2



RTHP6201SNH95-PS2




SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS SOLD SEPARATELY SEE PAGE 191

Shell Size: 20    Number of Contacts: 1    Contact Size: 10mm  
Sealing: IP67    Salt Spray: 48h

### High Amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> Technology

- Single Pole High Power Arrangements
- 10mm Contact Size
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- Operating Voltage: 630V
- Current Rating at 25°C: 300A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

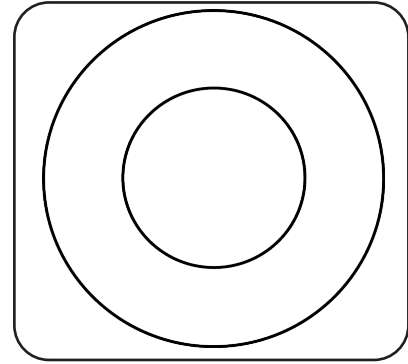

Insert Arrangement  
Pin (Male) Faceview

### Connector Part Numbers

| Connector Part Number | Connector Type                                | Wire Range (mm <sup>2</sup> ) | Amps | Contact     |                      |       |         | Figure Drawings |
|-----------------------|---|-------------------------------|------|-------------|----------------------|-------|---------|-----------------|
|                       |   |                               |      | Part Number | Type                 | AWG   | Plating |                 |
| RTHP6201SNH25-PS5     | Female Plug with Short Shielded Backshell     | 20-25                         | 120  | HS25DCS     | Crimp Barrel, Female | 4     | Silver  | 1               |
| RTHP6201SNH35-PS2     | Female Plug with Short Shielded Backshell     | 30-35                         | 130  | HS35DCS     | Crimp Barrel, Female | 4     | Silver  | 2               |
| RTHP6201SNH50-PS2     | Female Plug with Short Shielded Backshell     | 40-50                         | 180  | HS50DCS     | Crimp Barrel, Female | 1/0-0 | Silver  | 3               |
| RTHP6201SNH70-PS1     | Female Plug with Short Shielded Backshell     | 60-70                         | 250  | HS70DCS     | Crimp Barrel, Female | 2/0-0 | Silver  | 4               |
| RTHP6201SNH70-PS2     | Female Plug with Short Shielded Backshell     | 60-70                         | 250  | HS70DCS     | Crimp Barrel, Female | 2/0-0 | Silver  | 5               |
| RTHP6201SNH95-PS2     | Female Plug with Short Shielded Backshell     | 85-95                         | 300  | HS95DCS     | Crimp Barrel, Female | 3/0-0 | Silver  | 6               |
| RTHP0201PNH-50C       | Male Square Flange Receptacle Crimp           | 40-50                         | 180  | HP50DCS     | Crimp Barrel, Male   | 1/0-0 | Silver  | 7,12            |
| RTHP0201PNH-70C       | Male Square Flange Receptacle with Crimp      | 60-70                         | 250  | HP70DCS     | Crimp Barrel, Male   | 2/0-0 | Silver  | 8,12            |
| RTHP0201PNH-95C       | Male Square Flange Receptacle with Crimp      | 85-95                         | 300  | HP95DCS     | Crimp Barrel, Male   | 3/0-0 | Silver  | 9,12            |
| RTHP0201PNH-H1        | Male Square Flange Receptacle with Flat Tail  | N/A                           | 300  | HPDHS       | Flathole Tail, Male  | N/A   | Silver  | 10,12           |
| RTHP0201PNH-M1        | Male Square Flange Receptacle with Screw Tail | N/A                           | 300  | HPDSS       | Screw Tail, Male     | N/A   | Silver  | 11,12           |





Contacts included. See chart for specific requirements

Shell Size: 20  
Sealing: IP67

Number of Contacts: 1  
Salt Spray: 48h

Contact Size: 10mm

## Dimensions Plug

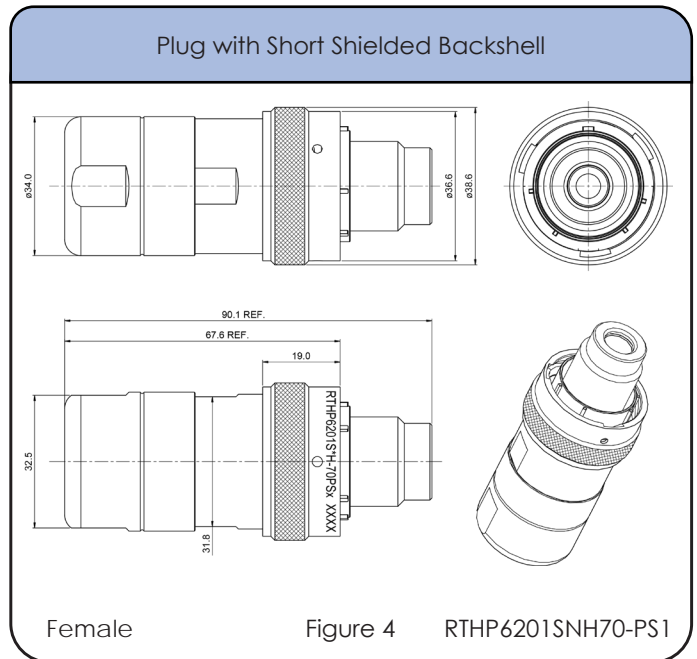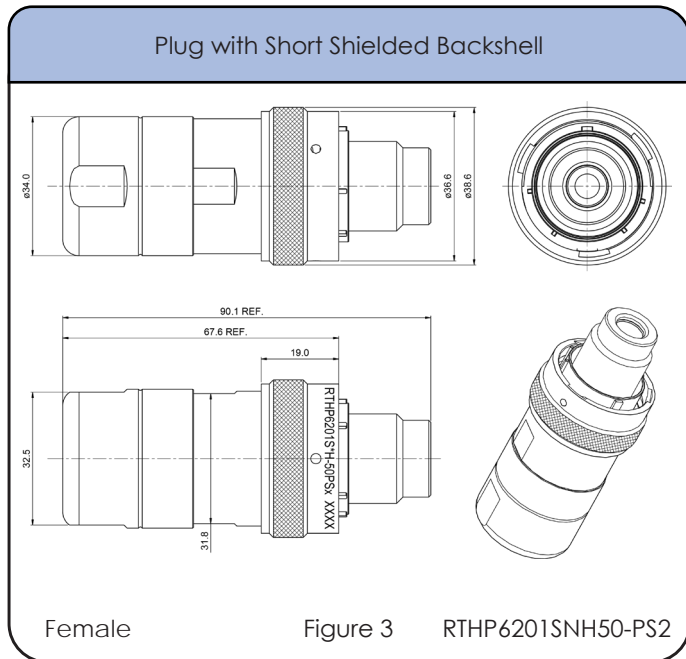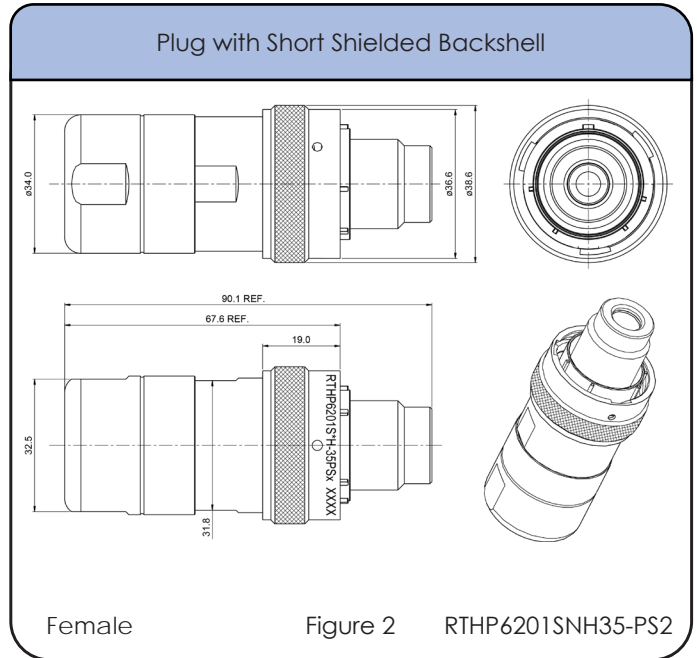
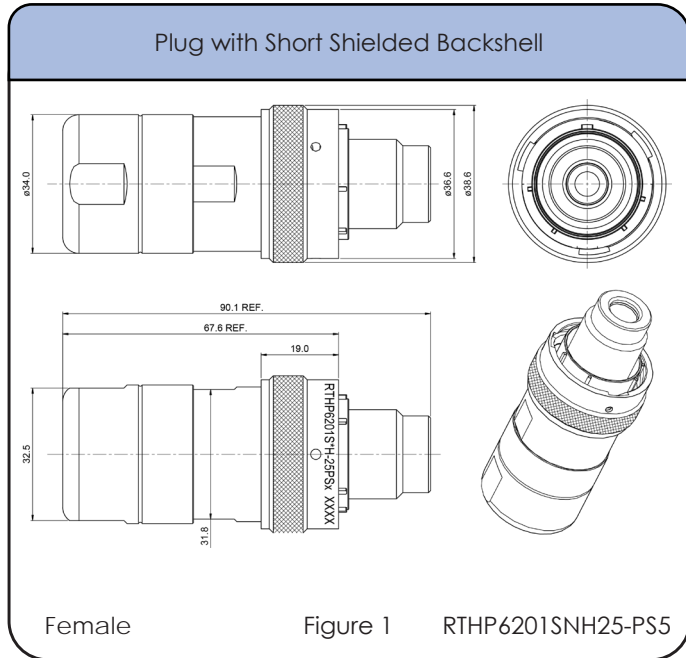




Shell Size: 20      Number of Contacts: 1  
Sealing: IP67      Salt Spray: 48h





Contact Size: 10mm

Dimensions Plug (con't)

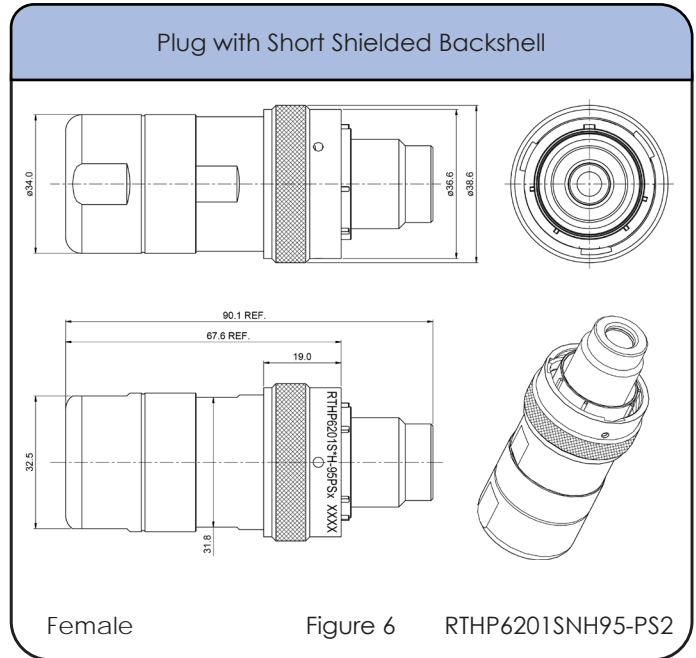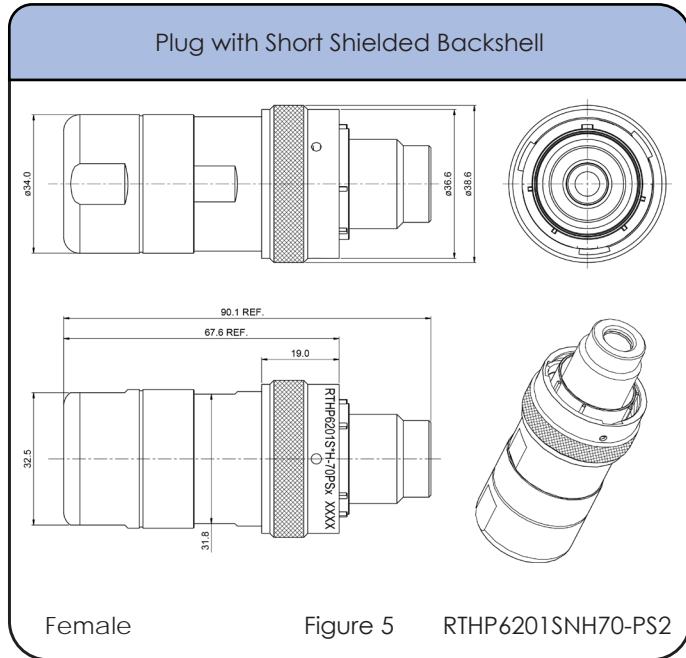



Shell Size: 20    Number of Contacts: 1    Contact Size: 10mm  
 Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

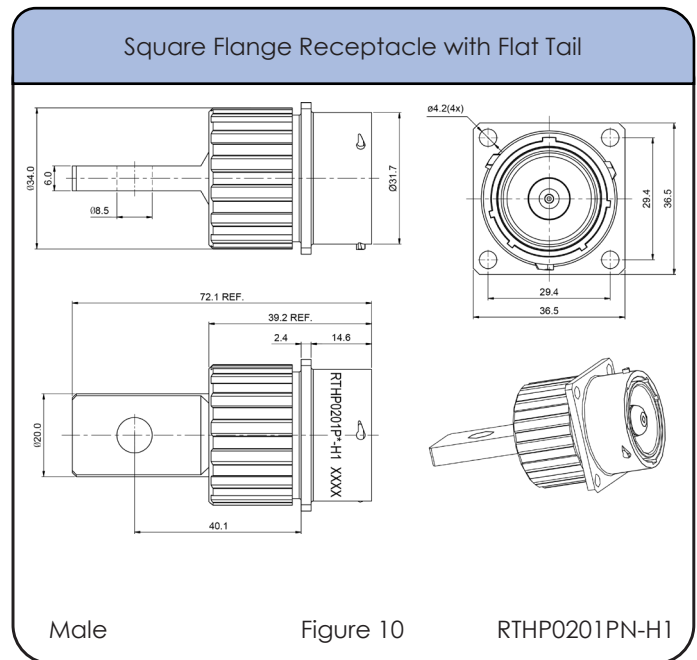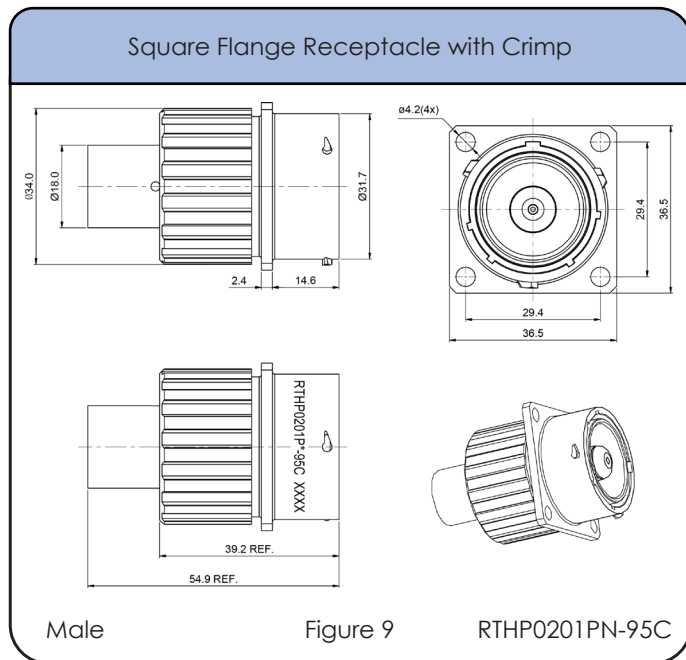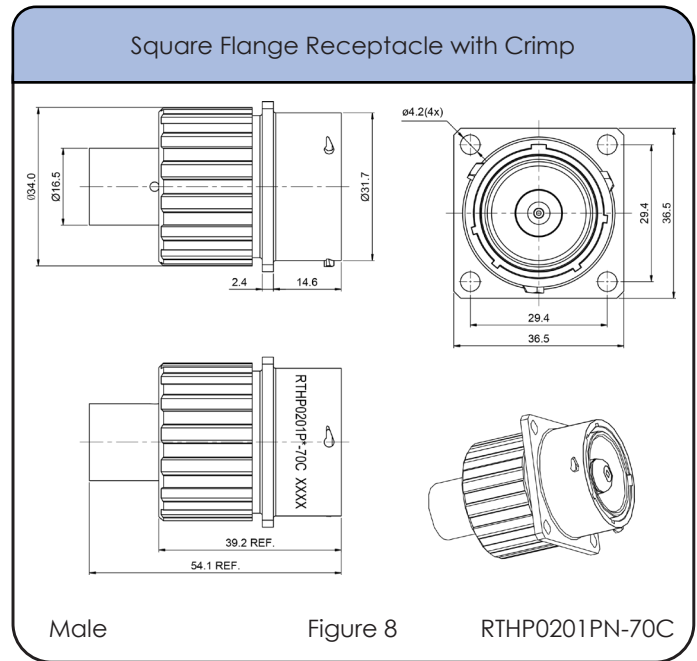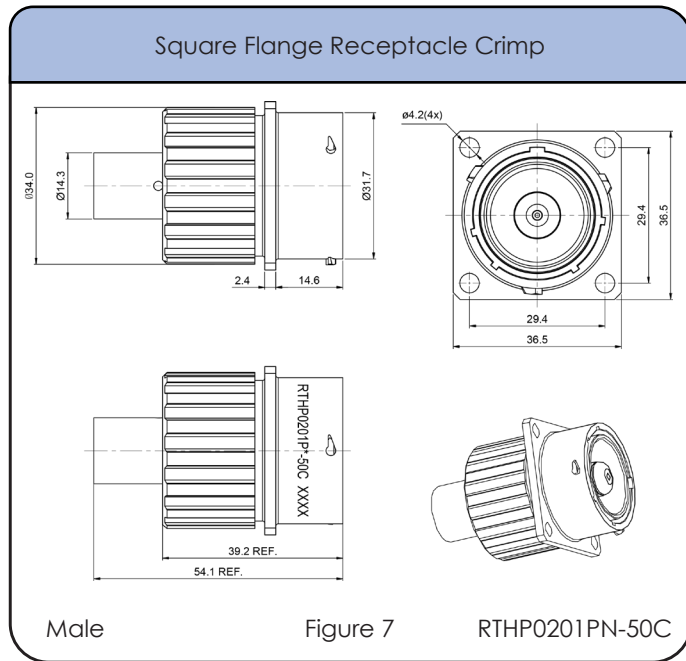

Shell Size: 20    Number of Contacts: 1    Contact Size: 10mm  
Sealing: IP67    Salt Spray: 48h

### Dimensions Square Flange Receptacle (con't)

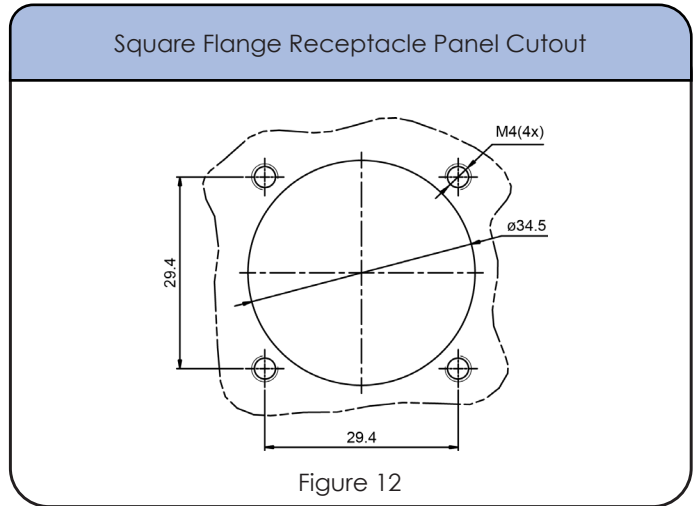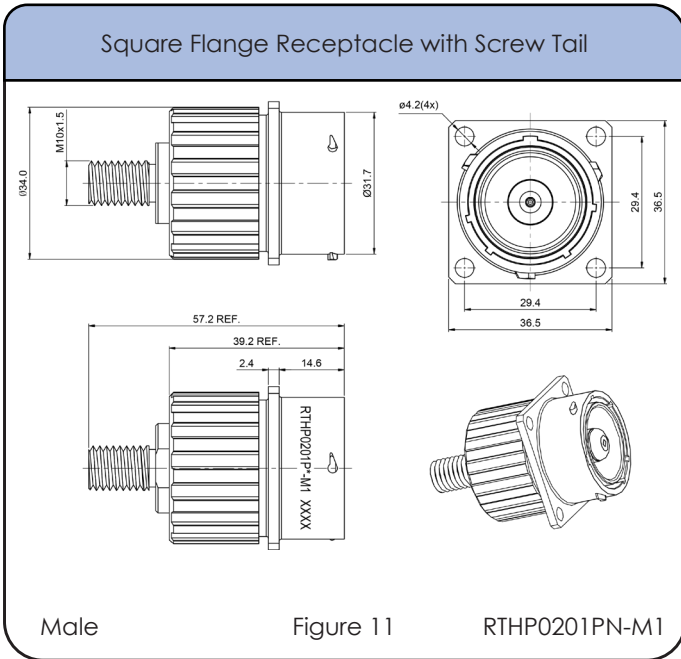

### Contacts



STEP 1  
Choose Receptacle Style

STEP 2  
Choose Plug Style

Square Flange Receptacles



Plug



Crimp Barrel Contact



Flat Hole Tail Contact  
(receptacle only)



Screw Tail Contact  
(receptacle only)




SEE TABLE ON NEXT PAGE FOR PART DETAILS

CONTACTS INCLUDED SEE PAGE 197

Shell Size: 20    Number of Contacts: 3    Contact Size: 3.6 mm  
Sealing: IP67    Salt Spray: 48h

### High Amperage eco | mate<sup>®</sup> rm with RADSOK<sup>®</sup> Technology

- Single Pole High Power Arrangements
- 3.6mm Contact Size
- Operating Temperature: -40°C to +125°C
- RoHS Compliant
- Operating Voltage: 630V
- Current Rating at 25°C: 86A
- Flammability Rating: UL94-V0
- High Reliability
- Low Contact Engagement / Separation Forces
- Low Contact Resistance
- High Mating Cycle Durability

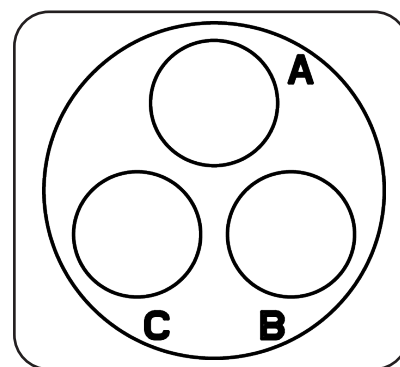

Insert Arrangement  
Pin (Male) Faceview

| Connector Part Number | Connector Type                                 | Wire Range (mm <sup>2</sup> ) | Amps | Contact     |                      |     |         | Figure Drawings |
|-----------------------|--|-------------------------------|------|-------------|----------------------|-----|---------|-----------------|
|                       |  |                               |      | Part Number | Type                 | AWG | Plating |                 |
| RTHP6203PNH-16S2      | Male 3 Position Plug with Shielded Backshell   | 10-16                         | 86   | MP6ARS8S    | Crimp Barrel, Male   | 8   | Silver  | 1               |
| RTHP6203SNH-16S2      | Female 3 Position Plug with Shielded Backshell | 10-16                         | 86   | MS6ARS8S    | Crimp Barrel, Female | 8   | Silver  | 2               |
| RTHP0203PNH-16C       | Male Square Flange Receptacle with Crimp       | 10-16                         | 86   | MP6ARS8S    | Crimp Barrel, Male   |     | Silver  | 3,5             |
| RTHP0203SNH-16C       | Female Square Flange Receptacle with Crimp     | 10-16                         | 86   | MS6ARS8S    | Crimp Barrel, Female |     | Silver  | 4,5             |



Contacts included. See chart for specific requirements

Shell Size: 20  
Sealing: IP67

Number of Contacts: 3  
Salt Spray: 48h

Contact Size: 3.6 mm

## Dimensions Plug

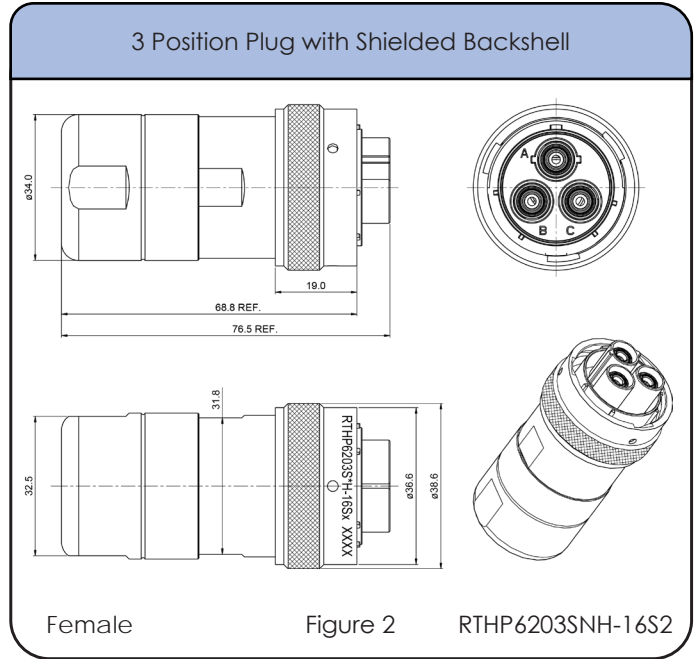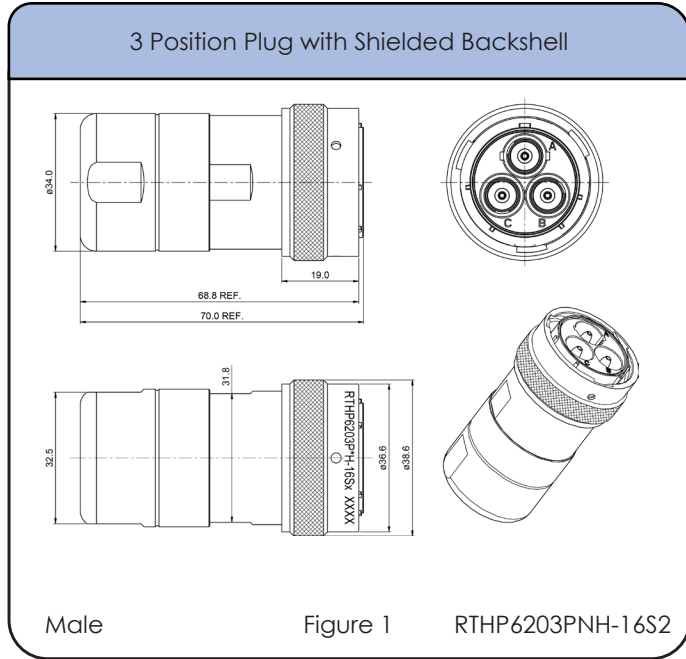




## Tools





Shell Size: 20    Number of Contacts: 3    Contact Size: 3.6 mm  
Sealing: IP67    Salt Spray: 48h

## Dimensions Square Flange Receptacle

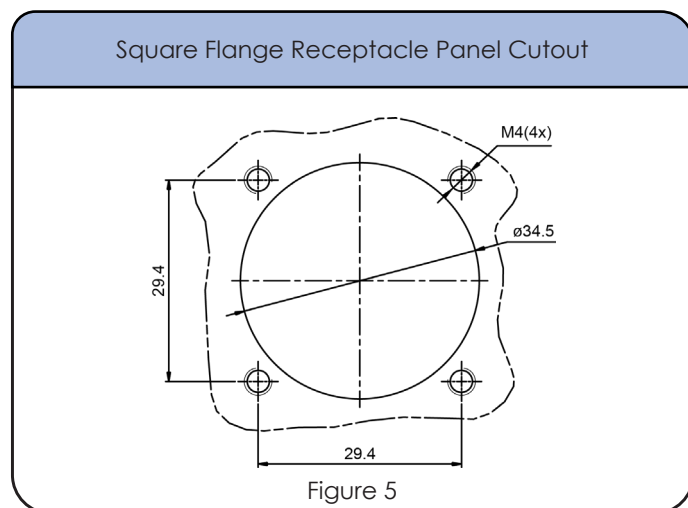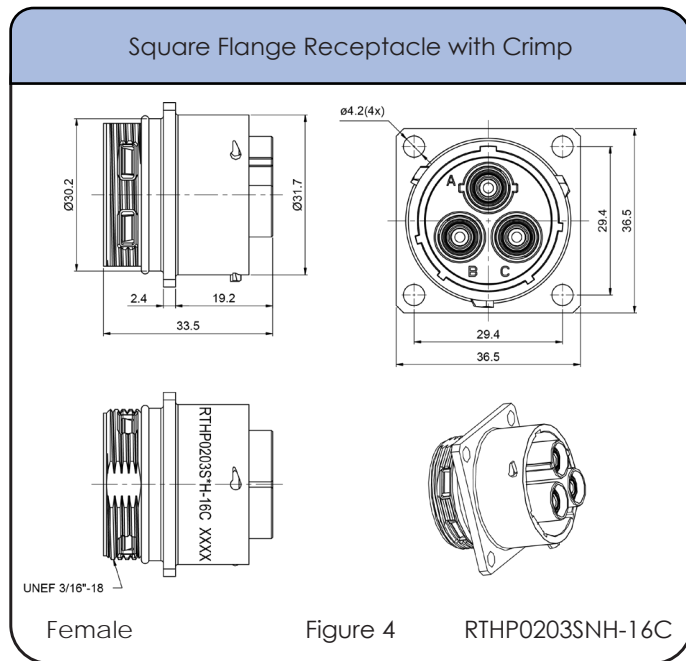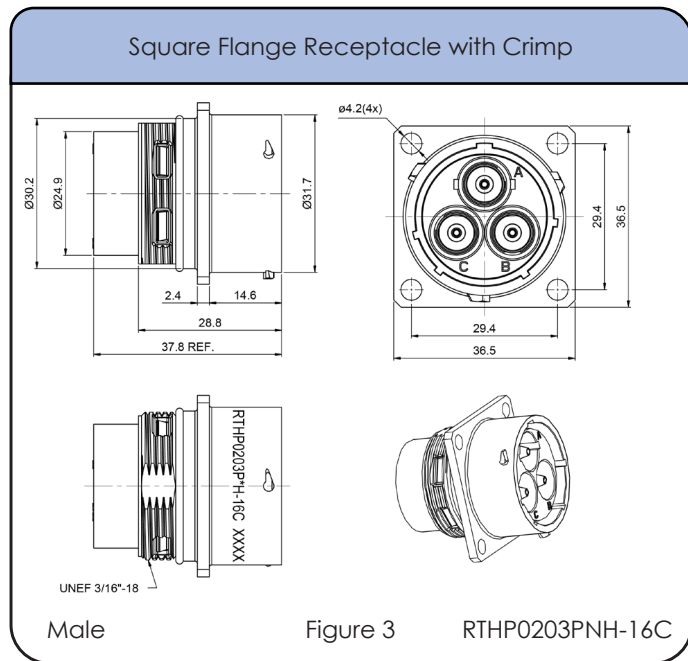

# Contacts

## Contact Overview

eco | mate® rm rugged metal shielded connectors and contacts are sold separately.

The contacts are offered in 2 types: machined and stamped & formed. The machined contacts are available in 3 styles: Standard, RADSOK®, and PCB.

eco | mate® rm contacts are offered in multiple sizes and are designed to be used in any connector with the same active part size regardless of shell size. See our **Connector Guide** starting at page 6 for matching parts and contacts.

Our customers can then choose to buy only one type of contact to equip all of their connectors, even if the shell sizes vary. Our standardized connector solutions makes it easy for our customers to reduce their costs and simplify assembly.

The eco | mate® rm rugged metal shielded connectors and contacts are easy to install and remove.



Machined contacts are generally chosen as a better solution for power applications or when lower quantities are needed.



Stamped & Formed contacts are available automatically crimped, making them ideal for high volume production applications.

Technical information about crimped contacts on page 233

# Contacts

## Plating and Bulk Order Options

### Plating Options

| Symbol | Plating                                      |
|--------|--|
| T      | Tin Plated (For Stamped and Formed Contacts) |
| S      | Silver Plated 5 Um (For Machined Contacts)   |
| F      | Gold Plated                                  |
| G5     | Gold Plated (Thickness 5μ")                  |
| G10    | Gold Plated (Thickness 10μ")                 |
| G15    | Gold Plated (Thickness 15μ")                 |
| G30    | Gold Plated (Thickness 30μ")                 |

Contacts supplied separately

### Standard Quantity Order Options

| Stamped & Formed  |   | Machined  |   |
|---|---|---|---|
|    |  |   |    |
| <ul style="list-style-type: none"> <li>• 25 pieces</li> <li>• bulk package</li> </ul> | <ul style="list-style-type: none"> <li>• 3000 pieces</li> <li>• reel</li> </ul>     | <ul style="list-style-type: none"> <li>• 25 pieces</li> <li>• bulk package</li> </ul> | <ul style="list-style-type: none"> <li>• 1000 pieces</li> <li>• bulk package</li> </ul> |

Amphenol offers two types of electrical contacts.

### Machined

# Contacts

## Stamped & Formed Crimped Contact Part Numbers



| Contact Size | AWG   | Wire range mm <sup>2</sup> | Current (A) | Electrical Resistance | Insulation Diameter (mm) | Plating    | PART NUMBER |           |
|--------------|-------|----------------------------|-------------|-----------------------|--------------------------|------------|-------------|-----------|
|              |       |                            |             |                       |                          |            | Male        | Female    |
| 2.5mm        | 14-12 | 2.5-3.5                    | 23          | --                    | 4.3                      | Tin        | SP12A1T     | SS12A1T   |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | 13          | <6mΩ                  | 3.2                      | Gold Flash | SP14M2F     | SS14M2F   |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | 13          | <6mΩ                  | 3.2                      | Gold 5μ"   | SP14M2G5    | SS14M2G5  |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | 13          | <6mΩ                  | 3.2                      | Gold 10μ"  | SP14M2G10   | SS14M2G10 |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | 13          | <6mΩ                  | 3.2                      | Gold 15μ"  | SP14M2G15   | SS14M2G15 |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | 13          | <6mΩ                  | 3.2                      | Gold 30μ"  | SP14M2G30   | SS14M2G30 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | 13          | <6mΩ                  | 3.2                      | Gold Flash | SP16M2F     | SS16M2F   |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | 13          | <6mΩ                  | 3.2                      | Gold 5μ"   | SP16M2G5    | SS16M2G5  |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | 13          | <6mΩ                  | 3.2                      | Gold 10μ"  | SP16M2G10   | SS16M2G10 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | 13          | <6mΩ                  | 3.2                      | Gold 15μ"  | SP16M2G15   | SS16M2G15 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | 13          | <6mΩ                  | 3.2                      | Gold 30μ"  | SP16M2G30   | SS16M2G30 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | 13          | <6mΩ                  | 3.2                      | Gold Flash | SP20M2F     | SS20M2F   |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | 13          | <6mΩ                  | 3.2                      | Gold 5μ"   | SP20M2G5    | SS20M2G5  |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | 13          | <6mΩ                  | 3.2                      | Gold 10μ"  | SP20M2G10   | SS20M2G10 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | 13          | <6mΩ                  | 3.2                      | Gold 15μ"  | SP20M2G15   | SS20M2G15 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | 13          | <6mΩ                  | 3.2                      | Gold 30μ"  | SP20M2G30   | SS20M2G30 |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | 13          | <6mΩ                  | 3.2                      | Gold Flash | SP24M2F     | SS24M2F   |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | 13          | <6mΩ                  | 3.2                      | Gold 5μ"   | SP24M2G5    | SS24M2G5  |

Available in Packages of 25 pieces or the Standard Reel Size of 3,000 pieces

# Contacts

## Stamped & Formed Contact Part Numbers (con't)



| Contact Size | AWG   | Wire range<br>mm <sup>2</sup> | Current<br>(A) | Electrical<br>Resistance | Insulation<br>Diameter<br>(mm) | Plating    | PART NUMBER |           |
|--------------|-------|-------------------------------|----------------|--------------------------|--------------------------------|------------|-------------|-----------|
|              |       |                               |                |                          |                                |            | Male        | Female    |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                       | 13             | <6mΩ                     | 3.2                            | Gold 10μ"  | SP24M2G10   | SS24M2G10 |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                       | 13             | <6mΩ                     | 3.2                            | Gold 15μ"  | SP24M2G15   | SS24M2G15 |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                       | 13             | <6mΩ                     | 3.2                            | Gold 30μ"  | SP24M2G30   | SS24M2G30 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                       | 5              | <15mΩ                    | 2.6                            | Gold Flash | SP20W2F     | SS20W2F   |
| 20 (Ø1.mm)   | 22-20 | .34-.50                       | 5              | <15mΩ                    | 2.6                            | Gold 5μ"   | SP20W2G5    | SS20W2G5  |
| 20 (Ø1.mm)   | 22-20 | .34-.50                       | 5              | <15mΩ                    | 2.6                            | Gold 10μ"  | SP20W2G10   | SS20W2G10 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                       | 5              | <15mΩ                    | 2.6                            | Gold 15μ"  | SP20W2G15   | SS20W2G15 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                       | 5              | <15mΩ                    | 2.6                            | Gold 30μ"  | SP20W2G30   | SS20W2G30 |
| 20 (Ø1.mm)   | 26-24 | .14-.25                       | 5              | <15mΩ                    | 2.6                            | Gold Flash | SP24W2F     | SS24W2F   |
| 20 (Ø1.mm)   | 26-24 | .14-.25                       | 5              | <15mΩ                    | 2.6                            | Gold 5μ"   | SP24W2G5    | SS24W2G5  |
| 20 (Ø1.mm)   | 26-24 | .14-.25                       | 5              | <15mΩ                    | 2.6                            | Gold 10μ"  | SP24W2G10   | SS24W2G10 |
| 20 (Ø1.mm)   | 26-24 | .14-.25                       | 5              | <15mΩ                    | 2.6                            | Gold 15μ"  | SP24W2G15   | SS24W2G15 |
| 20 (Ø1.mm)   | 26-24 | .14-.25                       | 5              | <15mΩ                    | 2.6                            | Gold 30μ"  | SP24W2G30   | SS24W2G30 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                       | 5              | <15mΩ                    | 2.6                            | Gold Flash | SP28W2F     | SS28W2F   |
| 20 (Ø1.mm)   | 30-28 | .05-.08                       | 5              | <15mΩ                    | 2.6                            | Gold 5μ"   | SP28W2G5    | SS28W2G5  |
| 20 (Ø1.mm)   | 30-28 | .05-.08                       | 5              | <15mΩ                    | 2.6                            | Gold 10μ"  | SP28W2G10   | SS28W2G10 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                       | 5              | <15mΩ                    | 2.6                            | Gold 15μ"  | SP28W2G15   | SS28W2G15 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                       | 5              | <15mΩ                    | 2.6                            | Gold 30μ"  | SP28W2G30   | SS28W2G30 |

Available in Packages of 25 pieces or the Standard Reel Size of 3,000 pieces

# Contacts

## PCB Contacts



## PCB Machined Contact Part Numbers

| Contact Size | Description   | Plating         | PART NUMBER   |               |
|--------------|---------------|-----------------|---------------|---------------|
|              |               |                 | Male          | Female        |
| 20           | Short Version | Gold Flash      | MP20W12E06F   | MS20W12E06F   |
| 20           | Short Version | Gold 5 $\mu$ "  | MP20W12E06G5  | MS20W12E06G5  |
| 20           | Short Version | Gold 10 $\mu$ " | MP20W12E06G10 | MS20W12E06G10 |
| 20           | Short Version | Gold 15 $\mu$ " | MP20W12E06G15 | MS20W12E06G15 |
| 20           | Short Version | Gold 30 $\mu$ " | MP20W12E06G30 | MS20W12E06G30 |
| 20           | Long Version  | Gold Flash      | MP20W12E09F   | MS20W12E09F   |
| 20           | Long Version  | Gold 5 $\mu$ "  | MP20W12E09G5  | MS20W12E09G5  |
| 20           | Long Version  | Gold 10 $\mu$ " | MP20W12E09G10 | MS20W12E09G10 |
| 20           | Long Version  | Gold 15 $\mu$ " | MP20W12E09G15 | MS20W12E09G15 |
| 20           | Long Version  | Gold 30 $\mu$ " | MP20W12E09G30 | MS20W12E09G30 |
| 16           | Short Version | Gold Flash      | MP16M12E06F   | MS16M12E06F   |
| 16           | Short Version | Gold 5 $\mu$ "  | MP16M12E06G5  | MS16M12E06G5  |
| 16           | Short Version | Gold 10 $\mu$ " | MP16M12E06G10 | MS16M12E06G10 |
| 16           | Short Version | Gold 15 $\mu$ " | MP16M12E06G15 | MS16M12E06G15 |
| 16           | Short Version | Gold 30 $\mu$ " | MP16M12E06G30 | MS16M12E06G30 |
| 16           | Long Version  | Gold Flash      | MP16M12E09F   | MS16M12E09F   |



# Contacts

## PCB Machined Contact Part Numbers (con't)



| Contact Size | Description   | Plating    | PART NUMBER   |               |
|--------------|---------------|------------|---------------|---------------|
|              |               |            | Male          | Female        |
| 16           | Long Version  | Gold 5μ"   | MP16M12E09G5  | MS16M12E09G5  |
| 16           | Long Version  | Gold 10μ"  | MP16M12E09G10 | MS16M12E09G10 |
| 16           | Long Version  | Gold 15μ"  | MP16M12E09G15 | MS16M12E09G15 |
| 16           | Long Version  | Gold 30μ"  | MP16M12E09G30 | MS16M12E09G30 |
| 2.5 mm       | Short Version | Gold Flash | MP10B12E05F   | MS10B12E05F   |
| 2.5 mm       | Short Version | Gold 5μ"   | MP10B12E05G5  | MS10B12E05G5  |
| 2.5 mm       | Short Version | Gold 10μ"  | MP10B12E05G10 | MS10B12E05G10 |
| 2.5 mm       | Short Version | Gold 15μ"  | MP10B12E05G15 | MS10B12E05G15 |
| 2.5 mm       | Short Version | Gold 30μ"  | MP10B12E05G30 | MS10B12E05G30 |
| 2.5 mm       | Long Version  | Gold Flash | MP10B12E08F   | MS10B12E08F   |
| 2.5 mm       | Long Version  | Gold 5μ"   | MP10B12E08G5  | MS10B12E08G5  |
| 2.5 mm       | Long Version  | Gold 10μ"  | MP10B12E08G10 | MS10B12E08G10 |
| 2.5 mm       | Long Version  | Gold 15μ"  | MP10B12E08G15 | MS10B12E08G15 |
| 2.5 mm       | Long Version  | Gold 30μ"  | MP10B12E08G30 | MS10B12E08G30 |

Available in Standard Package Sizes: 25 or 1,000 pieces

### PCB Soldering

The PNPCF series can be used in a wave soldering process, but not in a reflow soldering process. All high temperature processes are prohibited.


# Contacts

## PCB Contacts Dimensions

### Nominal Length G (mm)

Dimensions of dipsolder contacts out of connector (contacts to be ordered separately)

All dimensions are in mm  
xx=plating options

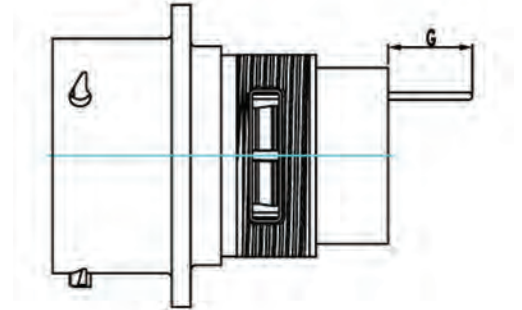

| Shell Size | Pin Contact  |              |              |              |              |              |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|
|            | MP20W12E06xx | MP20W12E09xx | MP16M12E04xx | MP16M12E06xx | MP10B12E05xx | MP10B12E08xx |
| 10         | 4.0          | 9.5          | 4.0          | 8.0          | --           | --           |
| 12         | 4.0          | 9.5          | 4.0          | 8.0          | 5.0          | --           |
| 14         | 4.0          | 9.5          | 4.0          | 8.0          | 5.2          | --           |
| 16         | 4.0          | 9.5          | 4.0          | 8.0          | --           | --           |
| 18         | --           | 9.5          | 4.0          | 8.0          | --           | --           |
| 20         | --           | 9.5          | 4.0          | 8.0          | --           | --           |
| 24         | --           | --           | --           | 3.9          | --           | --           |

| Shell Size | Socket Contact |              |              |              |              |              |
|------------|----------------|--------------|--------------|--------------|--------------|--------------|
|            | MS20W12E06xx   | MS20W12E09xx | MS16M12E04xx | MS16M12E06xx | MS10B12E05xx | MS10B12E08xx |
| 10         | 3.3            | 8.5          | 2.4          | 3.0          | --           | --           |
| 12         | 3.3            | 8.5          | 2.4          | 3.0          | --           | --           |
| 14         | 3.3            | 8.5          | 2.4          | 3.0          | --           | --           |
| 16         | 3.3            | 8.5          | 2.4          | 3.0          | --           | --           |
| 18         | --             | 8.5          | 2.4          | --           | --           | --           |
| 20         | --             | 8.5          | 2.4          | --           | --           | --           |
| 24         | --             | --           | --           | --           | --           | --           |

# Contacts

## Machined Standard Crimp Contact Part Numbers



| Contact Size | AWG   | Wire Range mm <sup>2</sup> | Plating    | Electrical Resistance | Part Number |            |
|--------------|-------|----------------------------|------------|-----------------------|-------------|------------|
|              |       |                            |            |                       | Male        | Female     |
| 8 (Ø3.6mm)   | 12-10 | 3.0-6.0                    | Silver     | <5mΩ                  | MP10A23S    | MS10A23S   |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | Gold Flash | <6mΩ                  | MP14M23F    | MS14M23F   |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | Gold 5μ"   | <6mΩ                  | MP14M23G5   | MS14M23G5  |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | Gold 10μ"  | <6mΩ                  | MP14M23G10  | MS14M23G10 |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | Gold 15μ"  | <6mΩ                  | MP14M23G15  | MS14M23G15 |
| 16 (Ø1.6mm)  | 14    | 2.0-2.5                    | Gold 30μ"  | <6mΩ                  | MP14M23G30  | MS14M23G30 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | Gold Flash | <6mΩ                  | MP16M23F    | MS16M23F   |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | Gold 5μ"   | <6mΩ                  | MP16M23G5   | MS16M23G5  |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | Gold 10μ"  | <6mΩ                  | MP16M23G10  | MS16M23G10 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | Gold 15μ"  | <6mΩ                  | MP16M23G15  | MS16M23G15 |
| 16 (Ø1.6mm)  | 18-16 | .75-1.5                    | Gold 30μ"  | <6mΩ                  | MP16M23G30  | MS16M23G30 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | Gold Flash | <6mΩ                  | MP20M23F    | MS20M23F   |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | Gold 5μ"   | <6mΩ                  | MP20M23G5   | MS20M23G5  |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | Gold 10μ"  | <6mΩ                  | MP20M23G10  | MS20M23G10 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | Gold 15μ"  | <6mΩ                  | MP20M23G15  | MS20M23G15 |
| 16 (Ø1.6mm)  | 22-20 | .34-.50                    | Gold 30μ"  | <6mΩ                  | MP20M23G30  | MS20M23G30 |

continued on next page

# Contacts

## Machined Standard Crimp Contact Part Numbers(con't)



| Contact Size | AWG   | Wire Range mm <sup>2</sup> | Plating    | Electrical Resistance | Part Number |            |
|--------------|-------|----------------------------|------------|-----------------------|-------------|------------|
|              |       |                            |            |                       | Male        | Female     |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | Gold Flash | <6mΩ                  | MP24M23F    | MS24M23F   |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | Gold 5µ"   | <6mΩ                  | MP24M23G5   | MS24M23G5  |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | Gold 10µ"  | <6mΩ                  | MP24M23G10  | MS24M23G10 |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | Gold 15µ"  | <6mΩ                  | MP24M23G15  | MS24M23G15 |
| 16 (Ø1.6mm)  | 26-24 | .14-.25                    | Gold 30µ"  | <6mΩ                  | MP24M23G30  | MS24M23G30 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                    | Gold Flash | <15mΩ                 | MP20W23F    | MS20W23F   |
| 20 (Ø1.mm)   | 22-20 | .34-.50                    | Gold 5µ"   | <15mΩ                 | MP20W23G5   | MS20W23G5  |
| 20 (Ø1.mm)   | 22-20 | .34-.50                    | Gold 10µ"  | <15mΩ                 | MP20W23G10  | MS20W23G10 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                    | Gold 15µ"  | <15mΩ                 | MP20W23G15  | MS20W23G15 |
| 20 (Ø1.mm)   | 22-20 | .34-.50                    | Gold 30µ"  | <15mΩ                 | MP20W23G30  | MS20W23G30 |
| 20 (Ø1.mm)   | 26-24 | .13-.25                    | Gold Flash | <15mΩ                 | MP24W23F    | MS24W23F   |
| 20 (Ø1.mm)   | 26-24 | .13-.25                    | Gold 5µ"   | <15mΩ                 | MP24W23G5   | MS24W23G5  |
| 20 (Ø1.mm)   | 26-24 | .13-.25                    | Gold 10µ"  | <15mΩ                 | MP24W23G10  | MS24W23G10 |
| 20 (Ø1.mm)   | 26-24 | .13-.25                    | Gold 15µ"  | <15mΩ                 | MP24W23G15  | MS24W23G15 |
| 20 (Ø1.mm)   | 26-24 | .13-.25                    | Gold 30µ"  | <15mΩ                 | MP24W23G30  | MS24W23G30 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                    | Gold Flash | <15mΩ                 | MP28W23F    | MS28W23F   |
| 20 (Ø1.mm)   | 30-28 | .05-.08                    | Gold 5µ"   | <15mΩ                 | MP28W23G5   | MS28W23G5  |
| 20 (Ø1.mm)   | 30-28 | .05-.08                    | Gold 10µ"  | <15mΩ                 | MP28W23G10  | MS28W23G10 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                    | Gold 15µ"  | <15mΩ                 | MP28W23G15  | MS28W23G15 |
| 20 (Ø1.mm)   | 30-28 | .05-.08                    | Gold 30µ"  | <15mΩ                 | MP28W23G30  | MS28W23G30 |

Available in Standard Package Sizes: 25 or 1,000 pieces

# Contacts

## RADSOK® Contacts

### RADSOK® Benefits at a Glance



- Cost effective production using stamp & form technology
- Fully automated production for full press capability
- Low insertion and extraction forces
- High number of mating cycles
- Reduced assembly effort
- Contact coverage up to 65%
- Long lasting contact normal forces guaranteed through optimal grid technology
- Self cleaning effect during the mating process
- No torque resistance required of electrical housing - allowing for easier designs
- Absorption of vibrations

### RADSOK® Technical Data

#### High Reliability

Unique RADSOK® design and construction technology creates an electrical contact interface that exceeds typical interconnect requirements. Applications in Aerospace, Medical, Industrial, Automotive, Mining, Offshore and other harsh environments depend on the high reliability of Amphenol RADSOK® technology.

#### Low Contact Engagement/Separation Forces

The hyperbolic lamella socket contact construction distributes normal forces over a high percentage of the mating surface. This creates a smooth, even engagement effort. This force distribution also contributes to excellent performance in vibration applications with resistance to typical fretting corrosion.

#### Low Contact Resistance

The large interface between the socket lamella and pin surface result in very low contact resistance, enabling the RADSOK® contacts high current ratings compared to traditional power contact designs.

#### High Mating Cycle Durability

RADSOK® contacts with typical silver plating finishes have demonstrated survival of 10,000 mating cycles. Even with continuous exposure to harsh environmental abuse (salt, sand and high humidity), RADSOK® contacts have been tested to maintain low contact resistance beyond 10,000 mating cycles.

For more technical information about RADSOK® see page 226

Crimp Barrel Contact



Flat Hole Tail Contact



Screw Tail Contact



# Contacts

## RADSOK® Machined Contact Part Numbers

| Contact Size | Description   | Wire Range AWG | Wire range mm <sup>2</sup> | Plating | Electrical Resistance | PART NUMBER |          |
|--------------|---------------|----------------|----------------------------|---------|-----------------------|-------------|----------|
|              |               |                |                            |         |                       | Male        | Female   |
| 3.6mm        | Crimp Barrel  | 8              | 10-16                      | Silver  | <1.0mΩ                | MP6ARS8S    | MS6ARS8S |
| 3.6mm        | Crimp Barrel  | 8              | 8-10                       | Silver  | <1.0mΩ                | HP10ACS     | HS10ACS  |
| 3.6mm        | Screw Tail    | N/A            | N/A                        | Silver  | <1.0mΩ                | HPASS       | HSASS    |
| 3.6mm        | Flathole Tail | N/A            | N/A                        | Silver  | <1.0mΩ                | HPAHS       | HSAHS    |
| 6mm          | Crimp Barrel  | 4              | 20-25                      | Silver  | <1.0mΩ                | HP25BCS     | HS25BCS  |
| 6mm          | Screw Tail    | N/A            | N/A                        | Silver  | <1.0mΩ                | HPBSS       | HSBSS    |
| 6mm          | Flathole Tail | N/A            | N/A                        | Silver  | <1.0mΩ                | HPBHS       | HSBHS    |
| 8mm          | Crimp Barrel  | 4              | 20-25                      | Silver  | <1.0mΩ                | --          | HS25CCS  |
| 8mm          | Crimp Barrel  | 2              | 30-35                      | Silver  | <1.0mΩ                | HP35CCS     | HS35CCS  |
| 8mm          | Crimp Barrel  | 2              | 30-35                      | Silver  | <1.0mΩ                | HP50CCS     | HS50CCS  |
| 8mm          | Screw Tail    | N/A            | N/A                        | Silver  | <1.0mΩ                | HPCSS       | HSCSS    |
| 8mm          | Flathole Tail | N/A            | N/A                        | Silver  | <1.0mΩ                | HPCHS       | HSCHS    |
| 10mm         | Crimp Barrel  | 4              | 20-25                      | Silver  | <1.0mΩ                | --          | HS25DCS  |
| 10mm         | Crimp Barrel  | 2              | 30-35                      | Silver  | <1.0mΩ                | --          | HS35DCS  |
| 10mm         | Crimp Barrel  | 1/0-1          | 40-50                      | Silver  | <1.0mΩ                | HP50DCS     | HS50DCS  |
| 10mm         | Crimp Barrel  | 2/0-1          | 60-70                      | Silver  | <1.0mΩ                | HP70DCS     | HS70DCS  |
| 10mm         | Crimp Barrel  | 3/0-1          | 85-95                      | Silver  | <1.0mΩ                | HP95DCS     | HS95DCS  |
| 10mm         | Screw Tail    | N/A            | N/A                        | Silver  | <1.0mΩ                | HPDSS       | HSDSS    |
| 10mm         | Flathole Tail | N/A            | N/A                        | Silver  | <1.0mΩ                | HPDHS       | HSDHS    |

Available in Standard Package Size: 25 or 1,000 pieces

## Field of Application Amperage for RADSOK® Machined Contacts



RTHP / RADSOK® Connectors  
starting at page 181

|          | Contact Size | 25° C |
|----------|--------------|-------|
| Amperage | 3.6mm        | 86 A  |
|          | 6mm          | 120A  |
|          | 8mm          | 180 A |
|          | 10mm         | 300 A |

All technical data has been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding. In particular, the information does not constitute or provide any legal guarantees.



# eco|mate<sup>®</sup> rm

## Rugged Metal Shielded Connectors

### Technical Information

#### Tooling

|                                     |     |
|-------------------------------------|-----|
| Machined                            | 212 |
| Stamped & Formed                    | 212 |
| Contact Extraction Tool             | 212 |
| Contact Extraction Tool Table       | 213 |
| Contact Extraction Tool Instruction | 214 |

#### Assembly Instructions

|  |     |
|--|-----|
| Jam Nut Assembly and Installation Instructions   | 215 |
| Flange Assembly and Installation Instructions  | 216 |
| eco mate <sup>®</sup> rm Standard Product Straight Plug and Receptacle Cable Assembly    | 217 |
| eco mate <sup>®</sup> rm Standard Product Straight Plug and Receptacle with End Cap      | 219 |
| eco mate <sup>®</sup> rm Standard Product Right Angle Plug and Receptacle Cable Assembly | 220 |
| eco mate <sup>®</sup> rm High Amperage Straight Plug Cable Assembly                      | 222 |
| eco mate <sup>®</sup> rm High Amperage Straight Plug - Shell Size 12 Cable Assembly      | 223 |
| eco mate <sup>®</sup> rm High Amperage 90° Plug Cable Assembly                           | 224 |

#### Technical Data


|   |     |
|---|-----|
| RADSOK <sup>®</sup> Product Overview  | 226 |
| RADSOK <sup>®</sup> Advantages and Custom Developed Solutions               | 227 |
| RADSOK <sup>®</sup> Series Rated Current and Working Voltage                | 228 |
| RADSOK <sup>®</sup> Series Dynamic Overload Tests at Different Temperatures | 229 |
| eco mate <sup>®</sup> rm Standard Product Rated Current and Working Voltage | 230 |
| UL94 + UL1977 Industry Standards  | 231 |
| IP Codes  | 232 |
| Crimp Connection  | 233 |
| Composition and Dimensions of Copper Wires                                  | 234 |
| Reduction Values  | 235 |
| Voltage Grading of Connectors   | 236 |
| Creepage Distance   | 237 |

# Tooling

## Machined



## Stamped & Formed

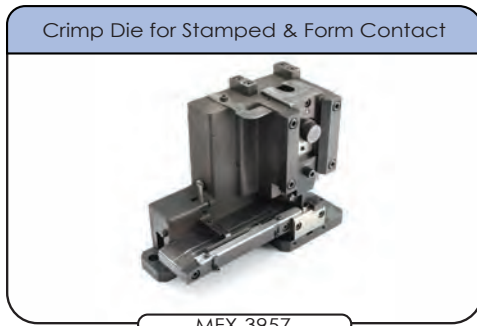

## Contact Extraction Tool



| Part Number | Description  |
|-------------|--|
| QRT08       | 3.6 mm contacts  |
| QXRT08R     | 3.6 mm contacts<br>(eco   mate <sup>®</sup> m High Amperage) |
| QXRT12S     | 2.5 mm contacts  |
| QXRT16      | #16 contacts   |
| QXRT20      | #20 contacts   |

# Tooling

## Contact Extraction Tool Table

| Contact Size | Contact Part Number |          | Extraction Tool |
|--------------|---------------------|----------|-----------------|
|              | Male                | Female   |                 |
| 2.5 mm       | SP12A1T             | SS12A1T  | QXRT12S         |
| 3.6mm        | HP10ACS             | HS10ACS  | QRT0BR          |
|              | HP10AHS             | HS10AHS  |                 |
|              | HP10ASS             | HS10ASS  |                 |
| 6 mm         | HP25BCS             | HS25BCS  | N/A             |
|              | HP25BHS             | HS25BHS  |                 |
|              | HP25BSS             | HS25BSS  |                 |
| 8 mm         | HP35CSS             | HS35CSS  | N/A             |
|              | HP35CCS             | HS35CCS  |                 |
|              | HP35CHS             | HS35CHS  |                 |
| 10 mm        | HP50DCS             | HS50DCS  | N/A             |
|              | HP50DHS             | HS50DHS  |                 |
|              | HP50DSS             | HS50DSS  |                 |
| 8            | MP10A23S            | MS10A23S | N/A             |


| Contact Size 16        |            |
|------------------------|------------|
| Extraction Tool QXRT16 |            |
| Contact Part Number    |            |
| Male                   | Female     |
| MP14M23F               | MS14M23F   |
| SP14M2F                | SS14M2F    |
| MP14M23FG5             | MS14M23G5  |
| SP14M2G5               | SS14M2G5   |
| SP14M2G10              | SS14M2G10  |
| MP14M23FG10            | MS14M23G10 |
| SP14M2G15              | SS14M2G15  |
| MP14M23FG15            | MS14M23G15 |
| MP14M23G30             | MS14M23G30 |
| SP14M2G30              | SS14M2G30  |
| MP16M23F               | MS16M23F   |
| SP16M2F                | SS16M2F    |
| MP16M23G5              | MS16M23G5  |
| SP16M2G5               | SS16M2G5   |
| SP16M2G10              | SS16M2G10  |
| MP16M23G10             | MS16M23G10 |
| SP16M2G10              | SS16M2G10  |
| MP16M23G15             | MS16M23G15 |
| SP16M2G15              | SS16M2G15  |
| MP16M23G15             | MS16M23G15 |
| SP16M2G30              | SS16M2G30  |
| MP16M23G30             | MS16M23G30 |

| Contact Size 16 (con't) |            |
|-------------------------|------------|
| Extraction Tool QXRT16  |            |
| Contact Part Number     |            |
| Male                    | Female     |
| SP20M2F                 | SS20M2F    |
| MP20M23F                | MS20M23F   |
| SP20M2G5                | SS20M2G5   |
| MP20M23G5               | MS20M23G5  |
| SP20M2G10               | SS20M2G10  |
| MP20M23G10              | MS20M23G10 |
| SP20M2G15               | SS20M2G15  |
| MP20M23G15              | MS20M23G15 |
| SP20M2G30               | SS20M2G30  |
| MP20M23G30              | MS20M23G30 |
| SP24M2F                 | SS24M2F    |
| MP24M23F                | MS24M23F   |
| SP24M2G5                | SS24M2G5   |
| MP24M23G5               | MS24M23G5  |
| MP24M23G10              | MS24M23G10 |
| SP24M2G10               | SS24M2G10  |
| MP24M23G15              | MS24M23G15 |
| SP24M2G15               | SS24M2G15  |
| MP24M23G30              | MS24M23G30 |
| SP24M2G30               | SS24M2G30  |


| Contact Size 20        |            |
|------------------------|------------|
| Extraction Tool QXRT20 |            |
| Contact Part Number    |            |
| Male                   | Female     |
| MP20W23F               | MS20W23F   |
| SP20W2F                | SS20W2F    |
| SP20W2G5               | SS20W2G5   |
| MP20W23G5              | MS20W23G5  |
| SP20W2G10              | SS20W2G10  |
| MP20W23G10             | MS20W23G10 |
| MP20W23G15             | MS20W23G15 |
| SP20W2G15              | SS20W2G15  |
| MP20W23G30             | MS20W23G30 |
| SP20W2G30              | SS20W2G30  |
| MP24W23F               | MS24W23F   |
| SP24W2F                | SS24W2F    |
| SP24W2G5               | SS24W2G5   |
| MP24W23G5              | MS24W23G5  |
| SP24W2G10              | SS24W2G10  |
| MP24W23G10             | MS24W23G10 |
| MP24W23G15             | MS24W23G15 |
| SP24W2G15              | SS24W2G15  |
| SP24W2G30              | SS24W2G30  |
| MP24W23G30             | MS24W23G30 |
| MP28W23F               | MS28W23F   |
| SP28W2F                | SS28W2F    |
| SP28W2G5               | SS28W2G5   |
| MP28W23G5              | MS28W23G5  |
| SP28W2G10              | SS28W2G10  |
| MP28W23G10             | MS28W23G10 |
| MP28W23G15             | MS28W23G15 |
| SP28W2G15              | SS28W2G15  |
| SP28W2G30              | SS28W2G30  |
| MP28W23G30             | MS28W23G30 |

# Tooling

## Contact Extraction Tool Instruction

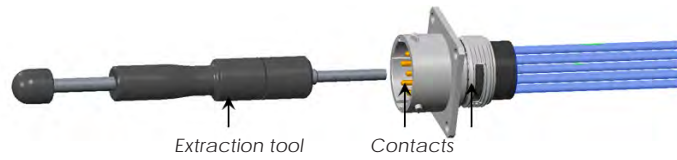

Step 1 Put extraction tool into insert



Step 2 Push the handle to take out the contacts



Step 3



Connector


Step 4



# Assembly Instructions

## Jam Nut Assembly and Installation Instructions

1. Remove insulation from wires and terminate contacts
2. Push contacts into connector insert
3. Seat o-ring, install and fasten receptacle in the panel cut-out
4. Tighten jam nut


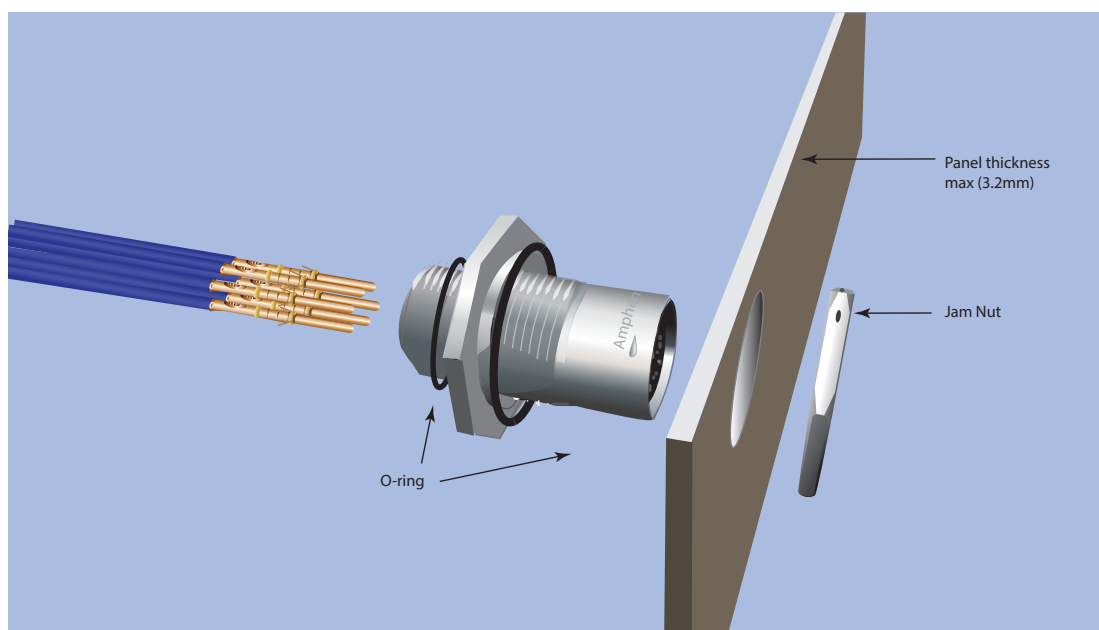


| Shell Size | Jam Nut torque (Nm) | Exterior jam nut dim. (min) | Ø Wire max (mm) | Panel thickness max (mm) |
|------------|---------------------|-----------------------------|-----------------|--------------------------|
| 10         | 3.4-4.1             | 22.2                        | 3.2             | 3.2                      |
| 12         | 5.2-5.6             | 27.0                        | 3.2             | 3.2                      |
| 14         | 6.2-6.8             | 32.0                        | 3.2             | 3.2                      |
| 16         | 7.9-8.5             | 33.3                        | 3.2             | 3.2                      |
| 18         | 9.0-9.6             | 36.5                        | 3.2             | 3.2                      |
| 20         | 10.2-10.7           | 39.7                        | 3.2             | 3.2                      |
| 22         | 11.3-12.4           | 42.9                        | 3.2             | 3.2                      |
| 24         | 12.4-13.6           | 46.0                        | 3.2             | 3.2                      |



# Assembly Instructions

## Flange Assembly and Installation Instructions

Front Assembly

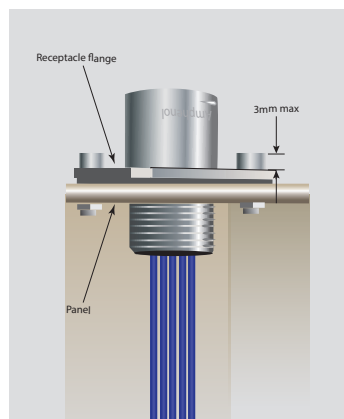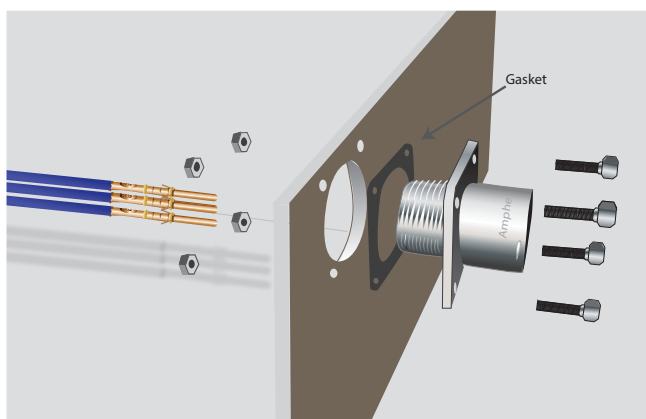

Rear Assembly

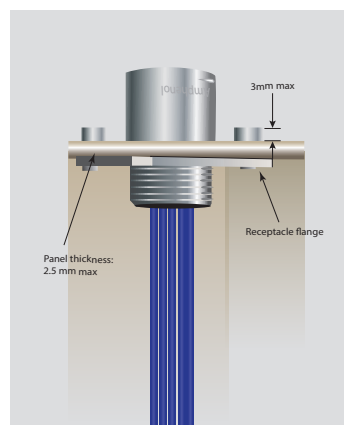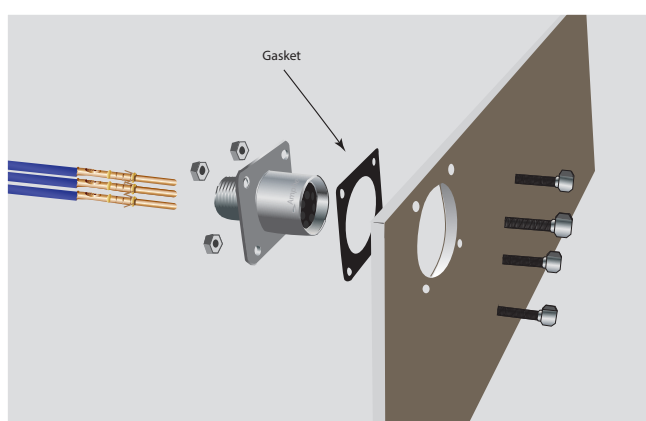

| Shell Size | Screw tightening torque (Nm) |
|------------|------------------------------|
| 10         | 0.30/0.40                    |
| 12         | 0.30/0.40                    |
| 14         | 0.30/0.40                    |
| 16         | 0.30/0.40                    |
| 18         | 0.35/0.45                    |
| 20         | 0.50/0.60                    |
| 22         | 0.55/0.65                    |
| 24         | 0.55/0.65                    |

1. Remove insulation from wires and terminate contacts
2. Push contacts into connector insert
3. Install and fasten receptacle in the panel cutout
4. For increased sealing of the system, use optional gasket



# Assembly Instructions

## eco | mate® rm Straight Plug and Receptacle Cable Assembly



Step 1: Slide parts onto cable



| Table 1    |                      |                       |
|------------|----------------------|-----------------------|
| Shell Size | L1 (long back shell) | L1 (short back shell) |
| 10         | 25~30 mm             | 20~25 mm              |
| 12         | 30~35 mm             | 25~30 mm              |
| 14         | 30~35 mm             | 25~30 mm              |
| 16         | 35~40 mm             | 30~35 mm              |
| 18         | 35~40 mm             | 30~35 mm              |

Step 2: Strip jacket



\* Make sure exposed shielding is not nicked or cut

Step 3: Attach tie-wrap



Dimensions are for reference only

| Table 2      |              |               |
|--------------|--------------|---------------|
| Contact Size | L2 (stamped) | L2 (machined) |
| 8#           | NA           | 7.5~8.5 mm    |
| 12#          | 8.2~9.2 mm   | 8.5~9.5 mm    |
| 16#          | 5.0~5.5 mm   | 7.5~8.5 mm    |
| 20#          | 5.5~6.0 mm   | 7.0~8.0 mm    |

Step 4: Trim tie-wrap




Step 5: Trim braided shield flush to edge of tie-wrap



Step 6: Strip to conductor



Step 7: Attach contacts to wire leads

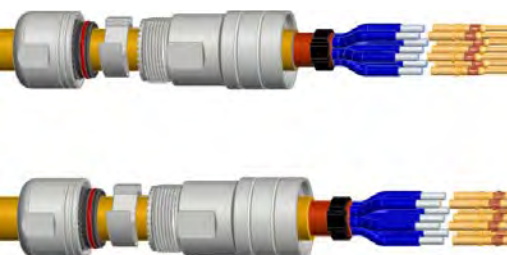


Step 8: Crimp contacts



# Assembly Instructions

## eco | mate<sup>®</sup> rm Straight Plug and Receptacle Cable Assembly (con't)

**Step 9: Insert contacts into connector cavities**

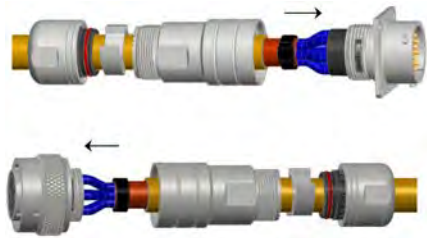

**Step 11: Push shielding clip into backshell**



**Step 12: Push cable grommet into backshell**




**Step 13: Tighten metal nut**



Torque (N·m)  
See Table 4

Torque (N·m)  
See Table 4

**Step 10: Assemble back shell**

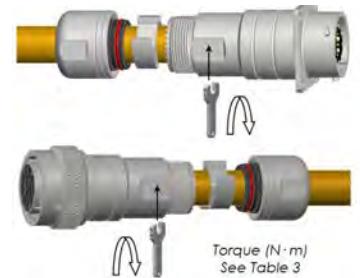

Torque (N·m)  
See Table 3

Table 3

| Size | Torque=T1 (N.m) |
|------|-----------------|
| 10   | 1.5~2.5 N.m     |
| 12   | 2.5~4.0 N.m     |
| 14   | 2.5~4.0 N.m     |
| 16   | 3.0~4.5 N.m     |
| 18   | 3.0~4.5N.m      |

Table 4

| Size | Torque=T2 (N.m) |
|------|-----------------|
| 10   | 2.0~3.0 N.m     |
| 12   | 3.0~5.0 N.m     |
| 14   | 3.5~5.5 N.m     |
| 16   | 4.0~6.0 N.m     |
| 18   | 5.0~8.0 N.m     |

**Step 14 Mate receptacle & plug (align the master key)**




### Assembled Dimensions

| Shell Size | Plug with socket match with long cord grip | Plug with socket match with short cord grip | Plug with pin match with long cord grip | Plug with pin match and short cord grip |
|------------|--|---|---|---|
| 10         | 43.0mm                                     | 33.0mm                                      | 38.0mm                                  | 28.0mm                                  |
| 12         | 45.0mm                                     | 35.0mm                                      | 35.0mm                                  | 25.0mm                                  |
| 14         | 45.0mm                                     | 35.0mm                                      | 35.0mm                                  | 25.0mm                                  |
| 16         | 45.0mm                                     | 35.0mm                                      | 40.0mm                                  | 30.0mm                                  |
| 18         | 48.0mm                                     | 39.0mm                                      | 40.0mm                                  | 32.0mm                                  |


# Assembly Instructions

## eco | mate<sup>®</sup> rm Straight Plug and Receptacle with End Cap

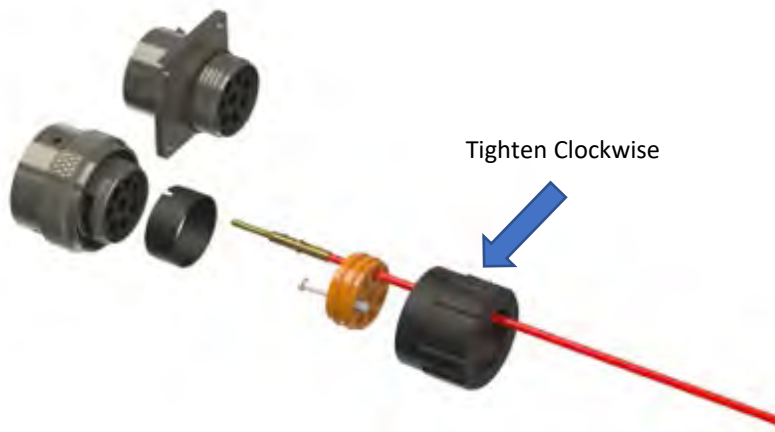

**Step 1:** Slide accessories onto the wire

**Step 2:** Strip per chart (Table 1)

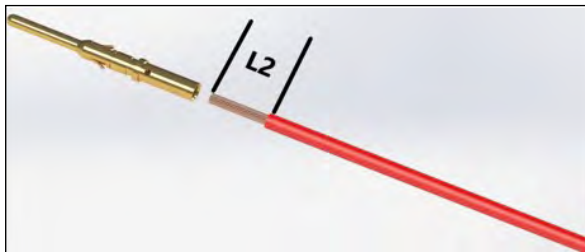

| Table 1      |              |               |
|--------------|--------------|---------------|
| Contact Size | L2 (stamped) | L2 (machined) |
| 6#           | N/A          | 1.5-15.5mm    |
| 8#           | NA           | 7.5~8.5 mm    |
| 12#          | 8.2~9.2 mm   | 8.5~9.5 mm    |
| 16#          | 5.0~5.5 mm   | 7.5~8.5 mm    |
| 20#          | 5.5~6.0 mm   | 7.0~8.0 mm    |

**Step 3:** Crimp contacts on wire

**Step 4:** Insert first contact in the grommet through required cavity. Then insert the contact into the insulator matching cavity.

**Step 5:** Place the grommet and compression ring on the connector

**Step 6:** Insert the remaining contacts, insert wire seals behind unwired contacts, push wire seal large end first until seated, trim length if needed

**Step 7** Tighten nut to recommended torque (Table 2)

| Table 2    |        |
|------------|--------|
| Shell Size | Torque |
| 10         | 0.80   |
| 12         | 1.20   |
| 14         | 1.70   |
| 16         | 2.40   |
| 18         | 2.40   |
| 20         | 3.00   |
| 22         | 3.60   |
| 24         | 4.20   |




# Assembly Instructions

## eco | mate<sup>®</sup> rm Right Angle Plug and Receptacle Cable Assembly




Step 1: Slide parts onto cable

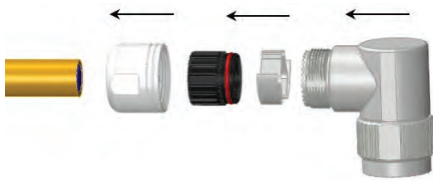


| Table 5 |                    |
|---------|--------------------|
| Size    | L5 (90° cord grip) |
| 10      | NA                 |
| 12      | 60-65 mm           |
| 14      | 60-65 mm           |
| 16      | 65-70 mm           |
| 18      | NA                 |

Dimensions are for reference only

Step 2: Strip jacket

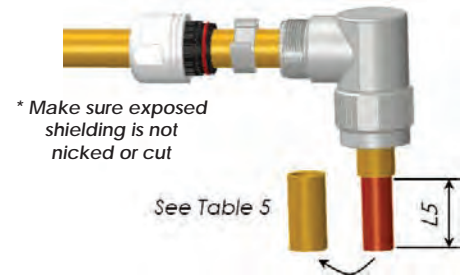


Step 3: Attach tie-wrap

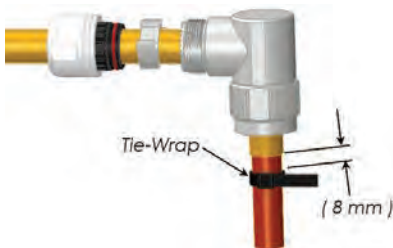

| Table 2      |              |               |
|--------------|--------------|---------------|
| Contact Size | L2 (stamped) | L2 (machined) |
| 8#           | NA           | 7.5-8.5 mm    |
| 12#          | 8.2-9.2 mm   | 8.5-9.5 mm    |
| 16#          | 5.0-5.5 mm   | 7.5-8.5 mm    |
| 20#          | 5.5-6.0 mm   | 7.0-8.0 mm    |


Step 4: Trim tie-wrap

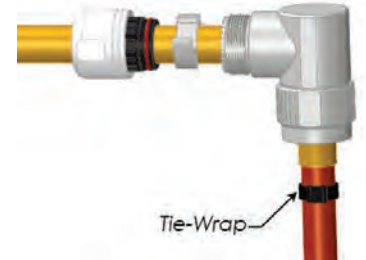

Step 5: Trim braided shield flush to edge of tie-wrap




Step 6: Strip to conductor

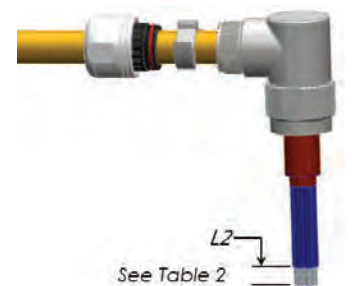

Step 7: Attach contacts to wire leads




Step 8: Crimp contacts

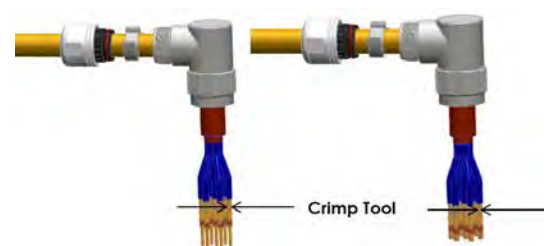


# Assembly Instructions

## eco | mate<sup>®</sup> rm Right Angle Plug and Receptacle Cable Assembly (cont.)

Step 9: Insert contacts into connector cavities

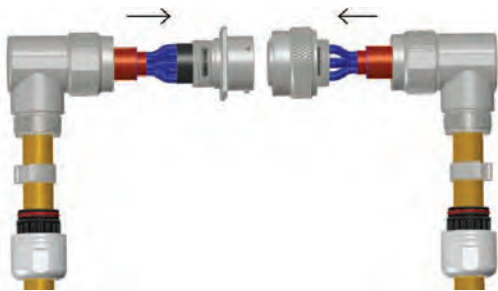


Step 10: Assemble back shell

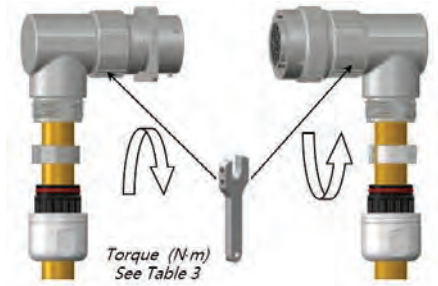

Step 11: Push shielding clip into backshell




Step 12 Push cable grommet into backshell

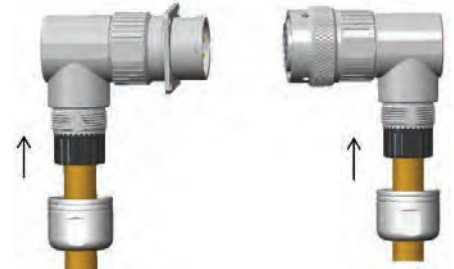


| Table 4 |                  |
|---------|------------------|
| Size    | Torque= T2 (N.m) |
| 10      | 2.0-3.0 N.m      |
| 12      | 3.0-5.0 N.m      |
| 14      | 3.5-5.5 N.m      |
| 16      | 4.0-6.0 N.m      |
| 18      | 5.0-8.0 N.m      |

Step 13: Tighten metal nut

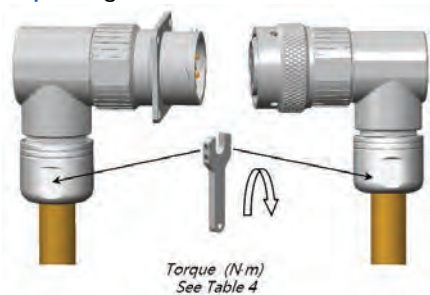

Step 14: Male receptacle & plug (align the master key)

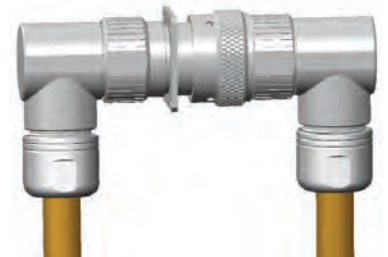




# Assembly Instructions

## eco | mate<sup>®</sup> rm High Amperage Straight Plug Cable Assembly



**Step 1: Slide components onto cable**



**Step 2: Strip jacket**

\* Make sure exposed shielding is not nicked or cut




**Step 3: Fold braided shielding over jacket**



**Step 4: Wrap foil over braided shielding**




**Step 5: Strip to conductor**

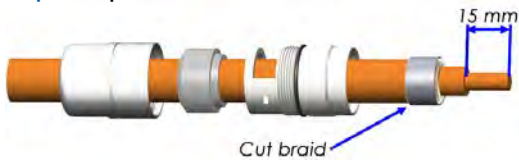


**Step 6: Slide onto conductor and crimp**



**Step 7: Slide plug onto barrel**

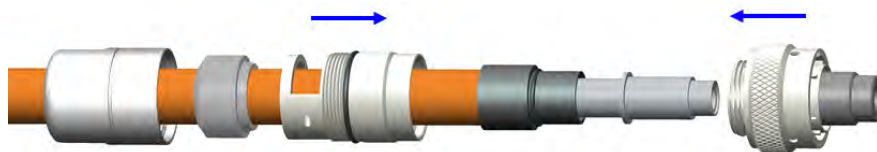

**Step 8: Attach and tighten plug as shown**

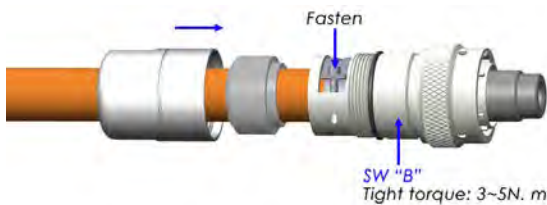

**Step 9: Attach and tighten backshell as shown**



**Data Chart**

| Instruction   | Shell 14 | Shell 16 | Shell 20 |
|---------------|----------|----------|----------|
| Dimension "A" | 25 mm    | 25 mm    | 30 mm    |
| SW "B"        | 24 mm    | 28 mm    | 32 mm    |
| SW "C"        | 24.5 mm  | 29 mm    | 32.5 mm  |




# Assembly Instructions


## RTHP SERIES™ Straight Plug - Shell Size 12 Cable Assembly



**Step 1:** Slide parts onto cable

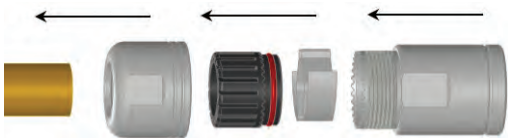

**Step 2:** Strip jacket to braided shielding and attach tie wrap

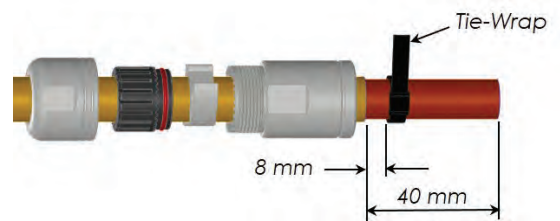

**Step 3:** Cut tie wrap to remove excessive material. Trim shielding flush to edge of tie wrap



**Step 4:** Strip to conductor




**Step 5:** Crimp terminal to conductor




**Step 6:** Slide plug onto crimped terminal assembly



**Step 7:** Tighten plug to backshell. Perform pull test to assure correct contact assembly

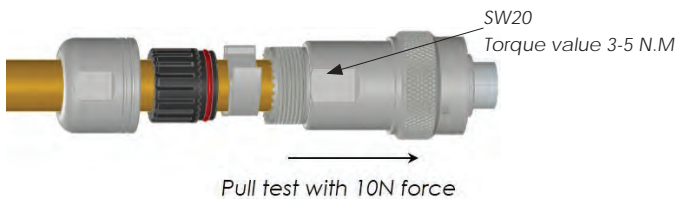


**Step 8:** Insert shielding clip and cable grommet. Attach and tighten back-nut to backshell

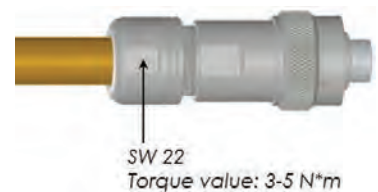


# Assembly Instructions


## eco | mate<sup>®</sup> rm High Amperage 90° Plug Cable Assembly

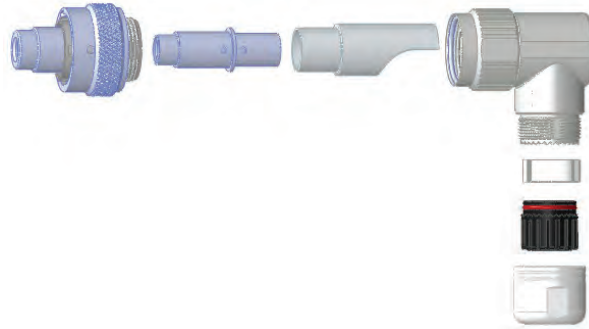


Step 1: Strip jacket to metal braiding

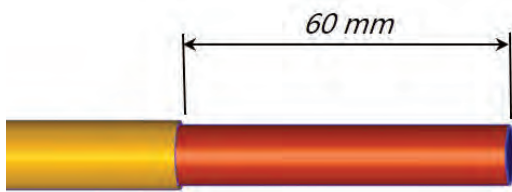

Step 2: Attach tie wrap and trim braiding flush to edge of tie-wrap

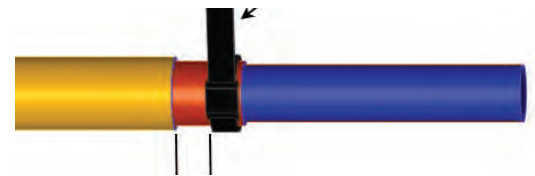


Step 3: Trim tie-wrap

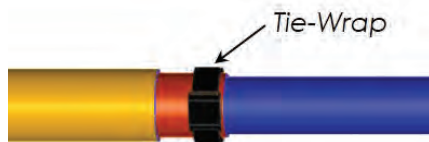


Step 4: Push cable into backshell. Slide components onto cable



Step 5: Trim jacket to conductor

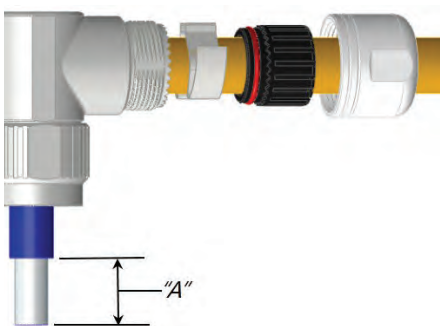


Step 6: Slide heat shrink tubing onto cable

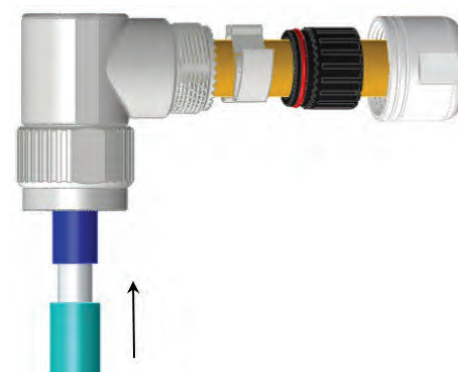


# Assembly Instructions

## eco | mate® rm High Amperage 90° Plug Cable Assembly (cont.)

Step 7: Crimp barrel to conductor

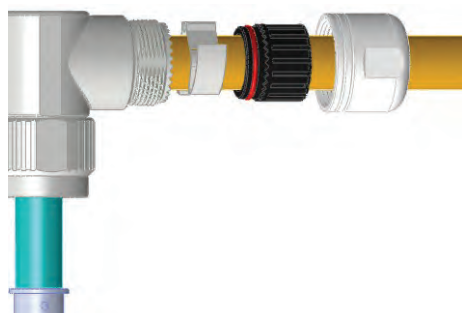

Step 8: Heat shrink tube over crimp

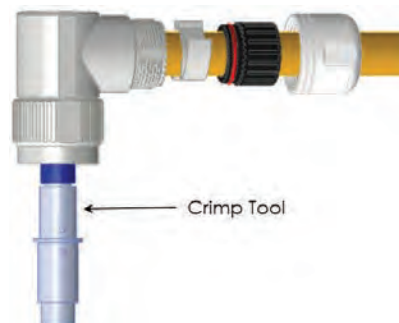


Step 9:




Step 10: Attach plug to backshell



Step 11: Insert shielding clip and cable grommet. Tighten connector to backshell as shown

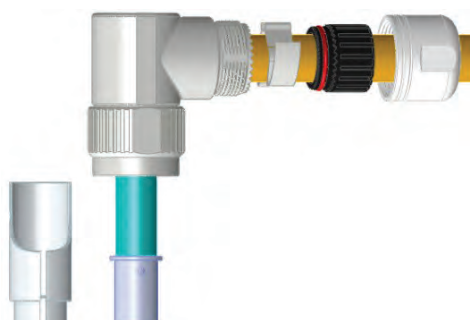

Step 12: Attach cable-nut to backshell and tighten as shown

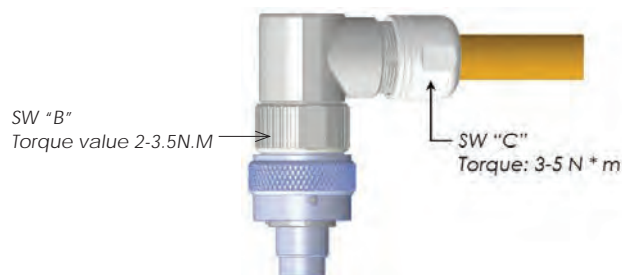


Data Chart

| Instruction   | Shell 12 | Shell 14 | Shell 16 |
|---------------|----------|----------|----------|
| Dimension "A" | 10 mm    | 15 mm    | 15 mm    |
| SW "B"        | 22 mm    | 25 mm    | 28 mm    |
| SW "C"        | 22 mm    | 22 mm    | 25 mm    |

# Technical Data

## RADSOK® Product Overview

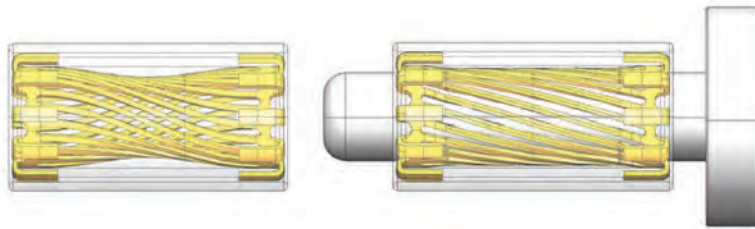

### The RADSOK® Design

- Socket cylinder within female contact has several equally spaced longitudinal beams twisted into a hyperbolic shape
- As a male pin is inserted, axial members in the female half deflect, imparting high current flow across the connection with minimal voltage loss
- The hyperbolic, stamped grid configuration ensures a large, coaxial, face-to-face surface area engagement
- Ideal for crimp termination applications requiring repeated mating cycles and high current with a low multi-volt drop



RADSOK® technology is based upon a stamped and formed flat grid, uniquely twisted into a hyperbolic geometry to provide robust, high density contact to the mating pin contact. Most pin and socket technologies rely on spring (beam element) properties of the contact elements, which tend to weaken over time. Unlike most other pin and socket solutions, the RADSOK® contact also utilizes the tensile strength properties of the flat, high conductivity alloy grid. This provides the high normal forces required for conductivity while also providing a large conductive surface area. Correspondingly low voltage drop and low temperature rise are also achieved while maintaining low insertion forces.

RADSOK® Contact (Max. current carrying capacity meet DIN EN 60512 specification.)

| Shell size  | Applicable Cable  | Contact Plating | current (AC)  |
|-------------|---|-----------------|---|
|             |   |                 | temperature   |
| 12 (3.6mm)  | 10mm <sup>2</sup> , 16mm <sup>2</sup>                     | Silver Plated   | 65A (10mm <sup>2</sup> ), 86A (16mm <sup>2</sup> )                              |
| 14 (6.0mm)  | 25mm <sup>2</sup>   | Silver Plated   | 120A (25mm <sup>2</sup> )   |
| 16 (8.0mm)  | 35mm <sup>2</sup> , 50mm <sup>2</sup>                     | Silver Plated   | 130A (35mm <sup>2</sup> ), 180A (50mm <sup>2</sup> )                            |
| 20 (10.0mm) | 50mm <sup>2</sup> , 70mm <sup>2</sup> , 95mm <sup>2</sup> | Silver Plated   | 180A (50mm <sup>2</sup> ), 250A (70mm <sup>2</sup> ), 300A (95mm <sup>2</sup> ) |

**Note:** The given electrical values correspond to a single contact. With the addition of a housing, an increased number of poles or other modifications, the values must be adjusted downwards accordingly.

# Technical Data

## RADSOK® Advantages and Custom Developed Solutions

### RADSOK® Technology Advantages

- **High Reliability** - Unique design and construction technology create an electrical contact interface that exceeds typical interconnect requirements.
- **Low Contact Engagement/Separation Forces** - The hyperbolic lamella socket contact construction distributes normal forces over a high percentage of the mating pin surface. This creates a smooth, even engagement effort. This force distribution also contributes to excellent performance in vibration applications with resistance to typical fretting corrosion.
- **Low Contact Resistance** - The large interface area between the socket lamella and pin surface result in very low contact resistance, enabling the RADSOK® contacts high current ratings compared to traditional power contact designs.
- **High Mating Cycle Durability** - RADSOK® contacts with typical silver plating finishes have demonstrated survival of 20,000 mating cycles. Specialized plating and contact lubricants can extend cycle life to 200,000 matings or higher. Even with continuous exposure to harsh environmental abuse, RADSOK® contacts have been tested to maintain low contact resistance beyond 10,000 mating cycles.

### Standard and Custom-Developed Solutions


- In addition to the various standard sizes of RADSOK® components, custom-developed solutions are also available. Amphenol has the global design, engineering and manufacturing resources to provide RADSOK® sockets pressed into basbars, crimped to cables, assembled into connectors, assembled into customer or Amphenol designed specialized electrical devices, or as stand-alone components. Amphenol also manufactures a full compliment of mating pin contacts for any application.
- Steady-state current capacities for RADSOK® products range from 50 amps to over 1000 amps.
- Amphenol connectors with RADSOK® contacts are offered with a variety of positive locking features (HiLok® and SurLok®) that insure and maintain fully mated connections.
- Sealing (Sealtac™) and high voltage hot break options are available within the RADSOK® itself or within a very wide range of IP rated connector housings to provide environmental protection to the contact area.




# Technical Data

## RADSOK® Series Rated Current and Working Voltage Contact Current Carrying Capacity


Derating 3.6mm

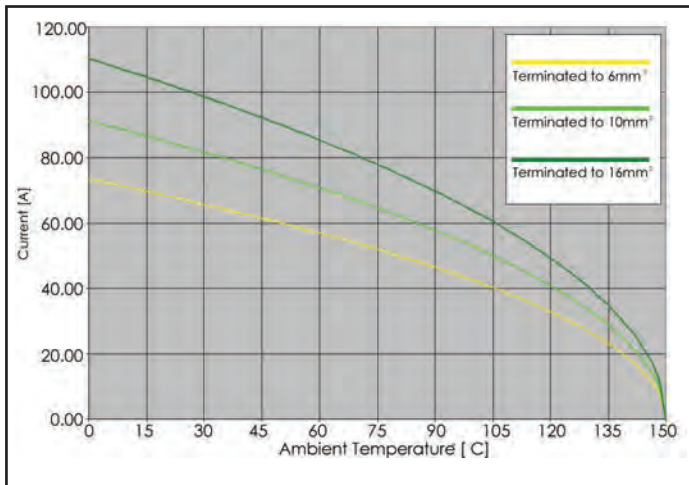


Derating 6mm

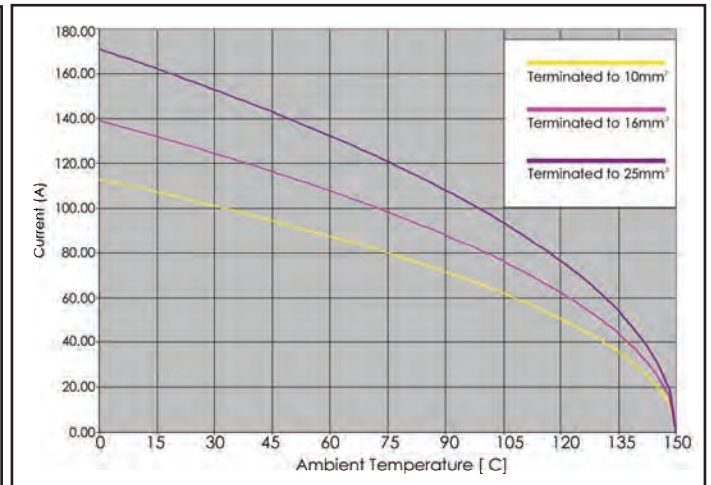

Derating 8mm

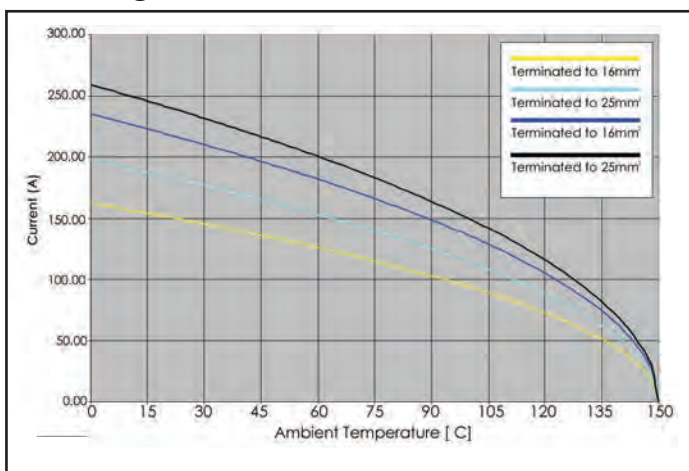

Derating 10mm

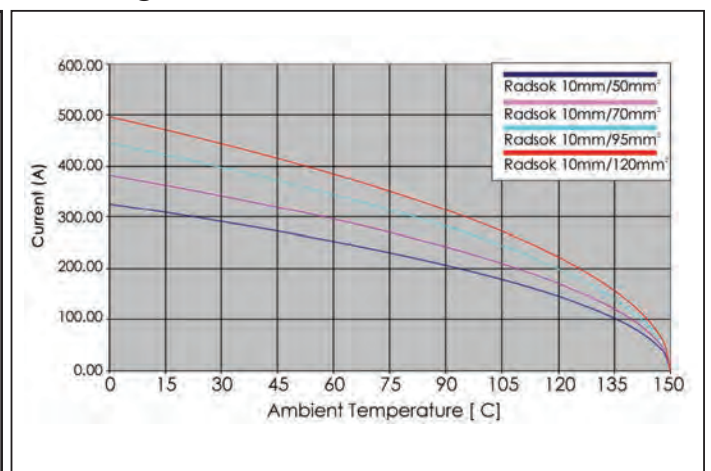





# Technical Data

## RADSOK® Series Dynamic Overload Tests at Different Temperatures

### 6mm RADSOK®

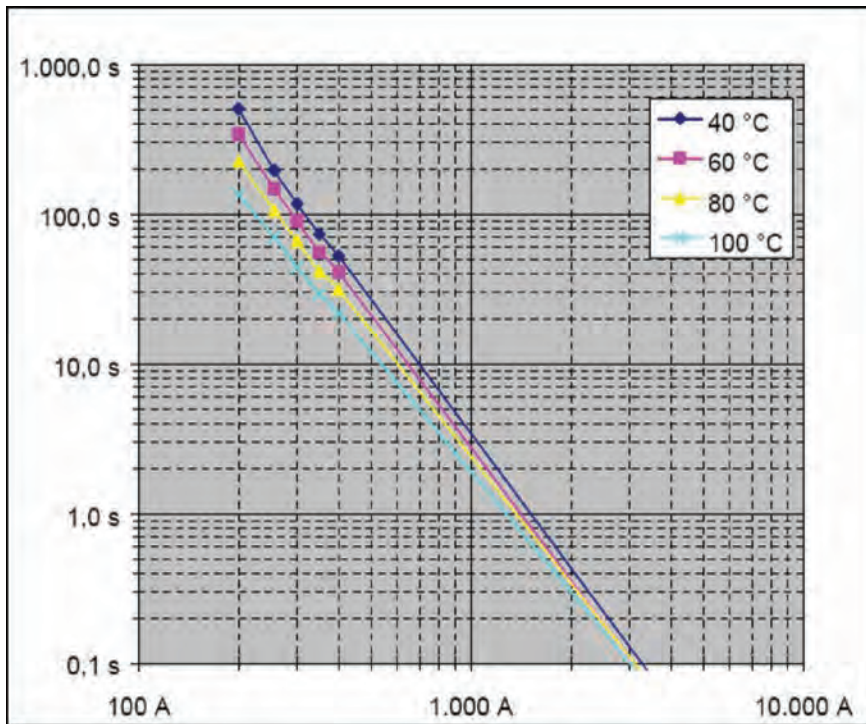


### 8mm RADSOK®

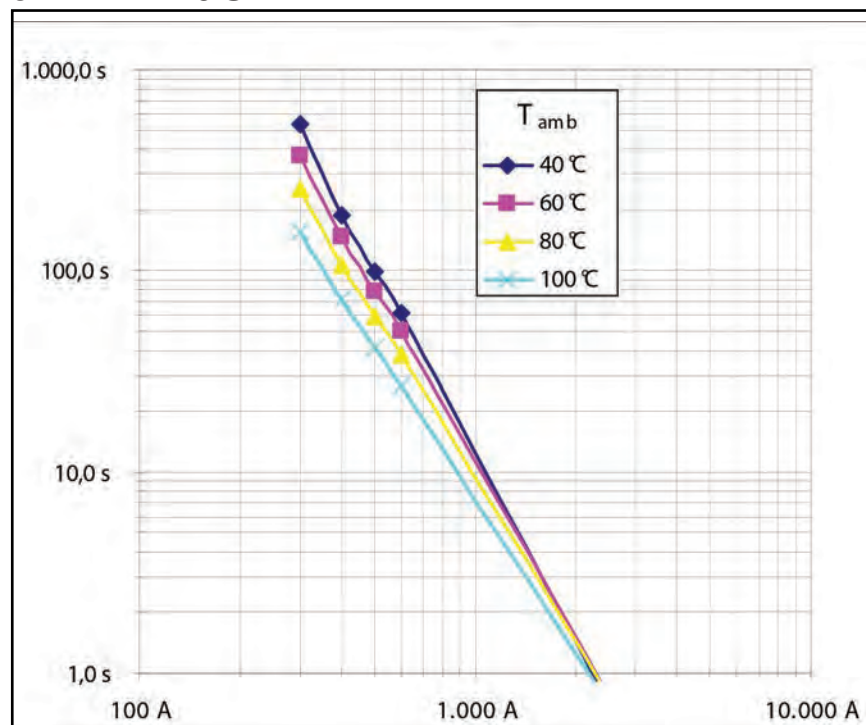

# Technical Data

eco | mate<sup>®</sup> rm Rated Current and Working Voltage  
 Current Carrying Capacity

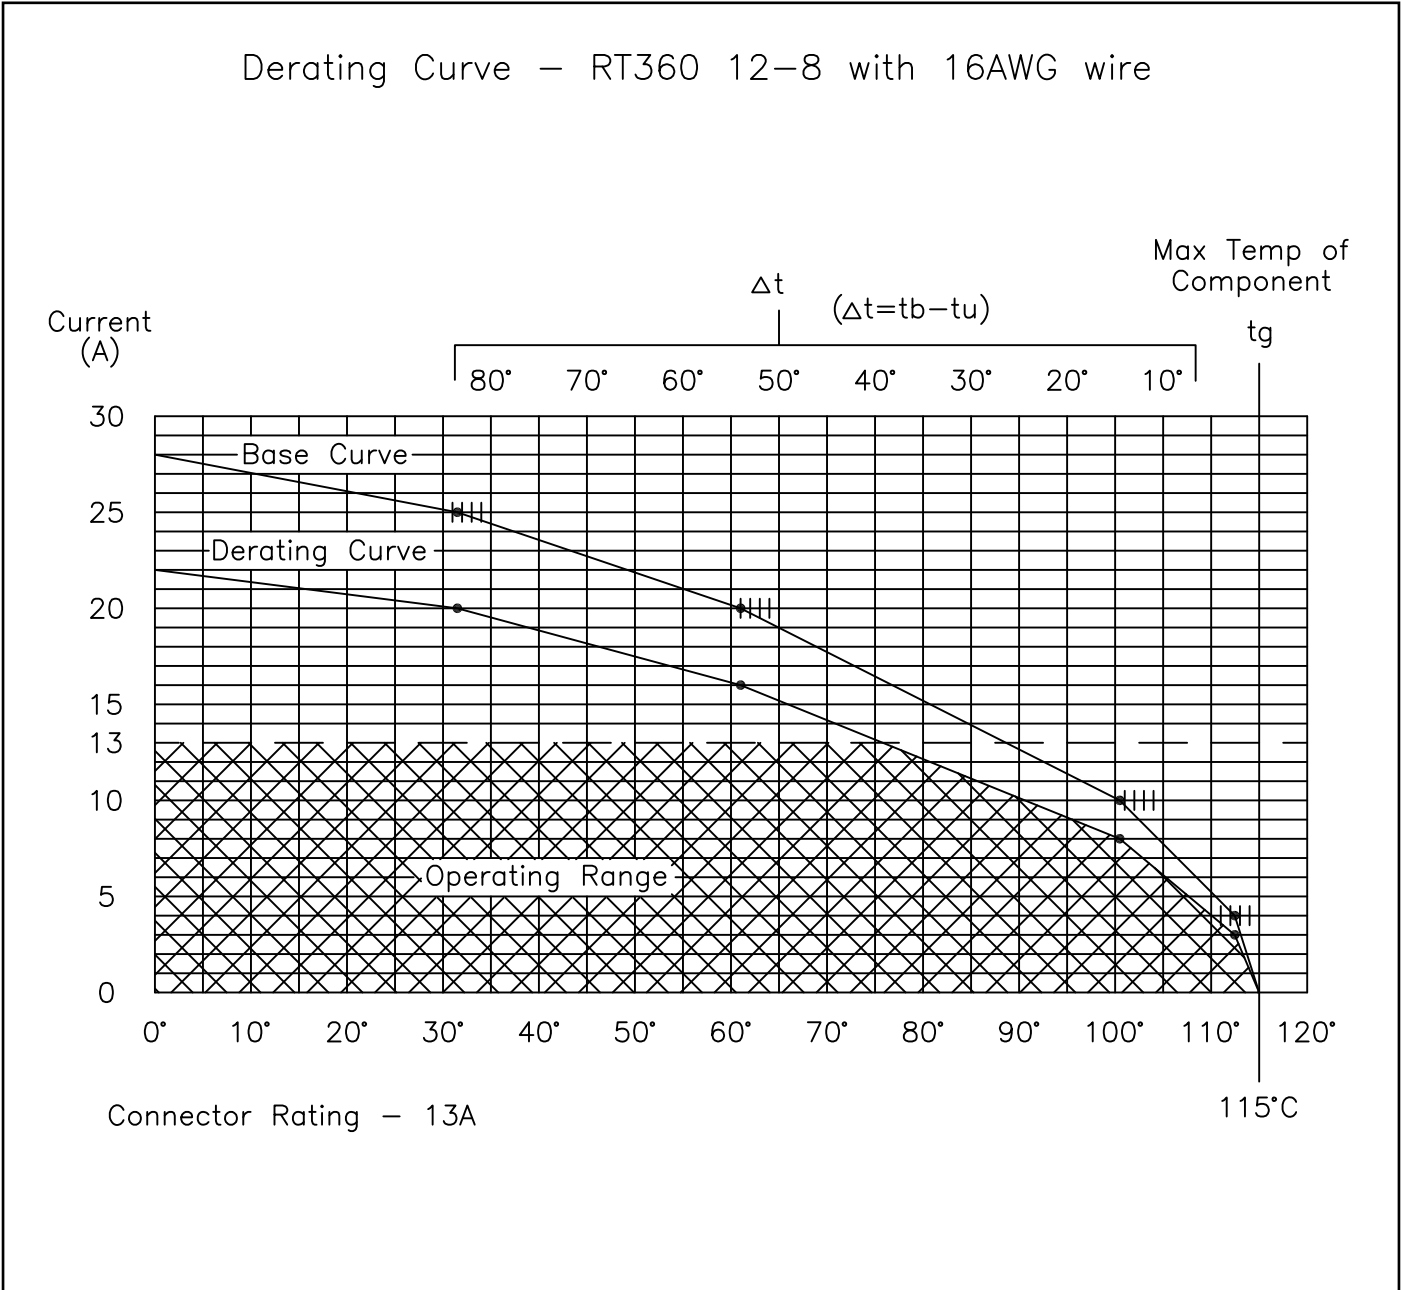

# Technical Data

## UL94 + UL1977 Industry Standards

There are two main standards for electrical conductors: UL94 and UL1977.

**UL94** - The standard for safety of flammability of plastic material for parts in devices and appliance testing.

**The eco | mate® rm series has been rated at V-0**

The Test Program: Specimen is orientated in a vertical position and is subjected to a flame for ten seconds, then removed. Once the specimen has stopped burning, the flame is then reapplied for another ten seconds and then removed.

### V-0 Vertical Burning


- Specimen self extinguishes within 10 seconds after each test flame application
- Specimen must not drip flaming particles that ignite the cotton indicator

**UL1977** - The standard for connectors used in data, signal, control and power applications-component.

**ECBT2** - A standard of UL1977 covering single and multi-pole connectors. Intended for factory assembly, includes devices that are incomplete in certain constructional features or are restricted in performance capabilities and are intended for use as components of complete equipment submitted for investigation rather than for direct separate installation in the field. The final acceptance of the component is dependent upon its installation and use in complete equipment submitted to UL.

# Technical Data

## IP Codes

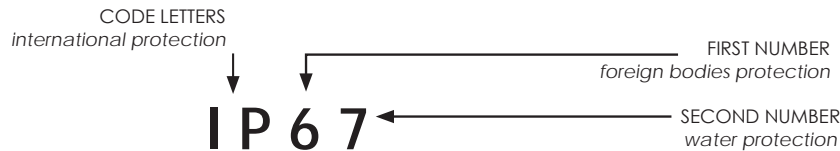

| 1st digit  | Brief description   | Definition   | 2nd digit        | Brief Description   | Definition   |
|--|---|--|------------------|---|--|
| 0  | Non-protected   | --   | 0                | Non-protected   | --   |
| 1  | Protected against access to hazardous parts with the back of a hand. Protected against solid foreign objects of $\geq 50\text{mm } \varnothing$ . | The probe, sphere of $50\text{mm } \varnothing$ , shall not fully penetrate and shall have adequate clearance from hazardous parts.  | 1                | Protected against vertically falling water drops  | Vertically falling drops shall have no harmful effects.  |
| 2  | Protected against access to hazardous parts with a finger. Protected against solid foreign objects of $\geq 12,5\text{mm } \varnothing$ .         | The jointed test finger of $12\text{mm } \varnothing$ , $80\text{mm}$ length, shall have adequate clearance from hazardous parts. The probe, sphere of $12,5\text{mm } \varnothing$ , shall not fully penetrate.               | 2                | Protected against vertically falling water drops when enclosure tilted up to $15^\circ$ | Vertically falling drops shall have no harmful effects when the enclosure is tilted at any angle up to $15^\circ$ .  |
| 3  | Protected against access to hazardous parts with a tool. Protected against solid foreign objects of $\geq 2,5\text{mm } \varnothing$ .            | The probe of $2,5\text{mm } \varnothing$ shall not penetrate at all.   | 3                | Protected against spraying water  | Water sprayed at any angle up to $60^\circ$ shall have no harmful effects.   |
| 4  | Protected against access to hazardous parts with a wire.  | The probe of $1\text{mm } \varnothing$ shall not penetrate at all.   | 4                | Protected against splashing water   | Water splashed against the enclosure from any direction shall have no harmful effects.   |
| 5  | Protected against access to hazardous parts with a wire. Dust-protected.  | The probe of $1\text{mm } \varnothing$ shall not penetrate. Intrusion of dust is not totally prevented, but dust shall not penetrate in a quantity to interfere with satisfactory operation of the device or to impair safety. | 5                | Protected against water jets  | Water projected in jets against the enclosure from any direction shall have no harmful effects.  |
| 6  | Protected against access to hazardous parts with a wire. Dust-tight.  | The probe of $1\text{mm } \varnothing$ shall not penetrate. No intrusion of dust.  | 6                | Protected against powerful water jets   | Water projected in powerful jets against the enclosure from any direction shall have no harmful effects.   |
| <p><b>Electrical connector devices have to be protected for safety reasons from outside influences like dust, foreign objects, direct contact, moisture and water. This protection is provided on industrial connectors by the housing latching devices and sealed cable entries. The degree of protection depends on the type of intended use. The standard IEC 60529 and/or DIN EN 60529 has specified the degree of protection and divided them into several classes. The attached charts gives an overview of all of the protection degrees.</b></p> |   |  | 7                | Protected against the effects of temporary immersion in water                           | Intrusion of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water for 30 min. in 1m depth.  |
|  |   |  | 8                | Protected against the effects of continuous immersion in water                          | Intrusion of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be agreed between manufacturer and user but which are more severe than for numeral 7. |
|  |   |  | 9K <sup>1)</sup> | Protected against water during high pressure/steam jet cleaning                         | Water projected in powerful jets with high pressure and heat against the enclosure from any direction shall have no harmful effects.   |

# Technical Data

## Crimp Connection

| Crimp connection   |                  |          |                      | Chart 2: Tensile strength for crimp connections |                   |                  |                      |                      |
|--|------------------|----------|----------------------|---|-------------------|------------------|----------------------|----------------------|
| <p>A crimp connection is a non-detachable electrical connection between a wire and a crimp contact produced with the crimp technology. Precise crimping dies are matched to the crimp barrel and the wire size and a defined deformation results in a reliable electrical connection. There are open barrels (stamped contacts) and closed crimp barrels (turned contacts).</p> <p>The main advantages of crimp connections are:</p> <ul style="list-style-type: none"> <li>• Efficient termination of contacts.</li> <li>• Reproducible electrical and mechanical figures by a constant crimp quality.</li> </ul> <p>The requirements for crimp connections are defined in DIN EN 60352-2.</p> <p>An important point for the quality of a crimp connection is the achieved tensile strength of the termination. Measuring the tensile strength is a practical means for quality control purposes. Chart 2 below shows the required minimum tensile strength for open and closed barrels according to the wire size.</p> |                  |          |                      | Wire size                                       |                   | Tensile strength |                      |                      |
|  |                  |          |                      | mm <sup>2</sup>                                 | AWG <sup>1)</sup> | N                |                      |                      |
|  |                  |          |                      | 0.05  | 30                | 6                |                      |                      |
|  |                  |          |                      | 0.08  | 28                | 11               |                      |                      |
|  |                  |          |                      | 0.12  | 26                | 15               |                      |                      |
|  |                  |          |                      | 0.14  |                   | 18               |                      |                      |
|  |                  |          |                      | 0.22  | 24                | 28               |                      |                      |
|  |                  |          |                      | 0.25  |                   | 32               |                      |                      |
|  |                  |          |                      | 0.32  | 22                | 40               |                      |                      |
|  |                  |          |                      | 0.5   | 20                | 60               |                      |                      |
|  |                  |          |                      | 0.75  |                   | 85               |                      |                      |
|  |                  |          |                      | 0.82  | 18                | 90               |                      |                      |
|  |                  |          |                      | 1.0   |                   | 108              |                      |                      |
|  |                  |          |                      | 1.3   | 16                | 135              |                      |                      |
|  |                  |          |                      | 1.5   |                   | 150              |                      |                      |
|  |                  |          |                      | 2.1   | 14                | 200              |                      |                      |
|  |                  |          |                      | 2.5   |                   | 230              |                      |                      |
|  |                  |          |                      | 3.3   | 12                | 275              |                      |                      |
| 4.0  |                  | 310      |                      |   |                   |                  |                      |                      |
| 5.3  | 10               | 355      |                      |   |                   |                  |                      |                      |
| 6.0  |                  | 360      |                      |   |                   |                  |                      |                      |
| 8.4  | 8                | 370      |                      |   |                   |                  |                      |                      |
| 10.0   |                  | 380      |                      |   |                   |                  |                      |                      |
| <b>Cross reference AWG - mm<sup>2</sup></b>  |                  |          |                      |   |                   |                  |                      |                      |
| The chart below allows a cross reference between American Wire Gauge (AWG) and metric wire sizes (mm <sup>2</sup> ).   |                  |          |                      |   |                   |                  |                      |                      |
| <b>Chart 3</b>   |                  |          |                      |   |                   |                  |                      |                      |
| AWG  | Wire composition | Leiter-Ø | Wire size            | AWG   | Wire composition  | Leiter-Ø         | Wire size            |                      |
| 30   | 1 x 0.25         | 0.25 mm  | 0.05 mm <sup>2</sup> | 20  | 1 x 0.81          | 0.81 mm          | 0.52 mm <sup>2</sup> |                      |
|  | 7 x 0.10         | 0.36 mm  | 0.06 mm <sup>2</sup> |   | 7 x 0.32          | 0.97 mm          | 0.56 mm <sup>2</sup> |                      |
| 28   | 1 x 0.32         | 0.32 mm  | 0.08 mm <sup>2</sup> | 18  | 19 x 0.20         | 1.02 mm          | 0.62 mm <sup>2</sup> |                      |
|  | 7 x 0.13         | 0.38 mm  | 0.09 mm <sup>2</sup> |   | 1 x 1.02          | 1.02 mm          | 0.79 mm <sup>2</sup> |                      |
| 26   | 1 x 0.40         | 0.40 mm  | 0.13 mm <sup>2</sup> | 16  | 19 x 0.25         | 1.27 mm          | 0.96 mm <sup>2</sup> |                      |
|  | 7 x 0.16         | 0.48 mm  | 0.14 mm <sup>2</sup> |   | 19 x 0.29         | 1.44 mm          | 1.23 mm <sup>2</sup> |                      |
|  | 19 x 0.10        | 0.51 mm  | 0.15 mm <sup>2</sup> |   | 14                | 19 x 0.36        | 1.80 mm              | 1.95 mm <sup>2</sup> |
| 24   | 1 x 0.51         | 0.51 mm  | 0.21 mm <sup>2</sup> | 12  | 19 x 0.46         | 2.29 mm          | 3.09 mm <sup>2</sup> |                      |
|  | 7 x 0.20         | 0.61 mm  | 0.23 mm <sup>2</sup> |   | 10                | 37 x 0.40        | 3.10 mm              | 4.60 mm <sup>2</sup> |
|  | 19 x 0.13        | 0.64 mm  | 0.24 mm <sup>2</sup> |   | 8                 | 133 x 0.29       | 4.0 mm               | 8.80 mm <sup>2</sup> |
| 22   | 1 x 0.64         | 0.64 mm  | 0.33 mm <sup>2</sup> | 6   | 133 x 0.36        | 5.5 mm           |                      |                      |
|  | 7 x 0.25         | 0.76 mm  | 0.36 mm <sup>2</sup> |   |                   |                  |                      |                      |
|  | 19 x 0.16        | 0.81 mm  | 0.38 mm <sup>2</sup> |   |                   |                  |                      |                      |
| It has to be noted that wires of the same AWG number but with different composition have slightly different mm <sup>2</sup> .  |                  |          |                      |   |                   |                  |                      |                      |

# Technical Data

## Composition and Dimensions of Copper Wires


**Chart 4: Composition and Dimensions of Copper Wires**

| Wire Size            | Wire Composition | Wire diameter |
|----------------------|------------------|---------------|
| 0.09 mm <sup>2</sup> | 12 x 0.10        | 0.48 mm       |
| 0.14 mm <sup>2</sup> | 18 x 0.10        | 0.50 mm       |
| 0.25 mm <sup>2</sup> | 14 x 0.15        | 0.70 mm       |
| 0.34 mm <sup>2</sup> | 7 x 0.25         | 0.78 mm       |
| 0.5 mm <sup>2</sup>  | 16 x 0.20        | 1.0 mm        |
| 0.75 mm <sup>2</sup> | 24 x 0.20        | 1.2 mm        |
| 1.0 mm <sup>2</sup>  | 32 x 0.20        | 1.4 mm        |
| 1.5 mm <sup>2</sup>  | 30 x 0.25        | 1.6 mm        |
| 2.5 mm <sup>2</sup>  | 35 x 0.30        | 2.2 mm        |
| 4.0 mm <sup>2</sup>  | 56 x 0.30        | 2.8 mm        |
| 6.0 mm <sup>2</sup>  | 19 x 0.64        | 3.4 mm        |
| 10 mm <sup>2</sup>   | 19 x 0.80        | 4.3 mm        |





### Current carrying capacity

The current carrying capacity of a connector is shown by a derating curve. The curve shows the currents that the connector can carry continuously and simultaneously through all its contacts. The curve is determined by testing following the standard DIN EN 60512. The upper temperature is limited by the contact and insulation material used. The sum of the ambient temperature and the temperature created by the current flow may not exceed the upper temperature. This means that the current carrying capacity has no fixed value but decreases with increasing ambient temperatures.

As a general example it can be said that a given connector which can carry 16A through all its contacts at 40°C ambient temperature can carry less, e.g. 12A, at an ambient temperature of 80°C. On the other hand it is often the case that not all contacts carry the whole rated current, which means that some single contacts may carry a higher current than that according to the derating curve. These currents have to be defined by testing.



**Chart 5: Current carrying capacity of copper wires in (A)**

| Installation type  | Wire size (mm <sup>2</sup> ) | 0.25 | 0.34 | 0.5 | 0.75 | 1    | 1.5  | 2.5  | 4  | 6  | 10 |
|--|------------------------------|------|------|-----|------|------|------|------|----|----|----|
| <br>B1 Wires in conduits and installation channels                |                              | -    | -    | -   | 7.6  | 10.4 | 13.5 | 18.3 | 25 | 32 | 44 |
| <br>B2 Cables and conductors in conduits or installation channels |                              | -    | -    | -   | -    | 9.6  | 12   | 16.5 | 23 | 29 | 40 |
| <br>C Cables and conductors along walls                           |                              | 4.0  | 5.0  | 7.1 | 9.1  | 11.7 | 15.2 | 21   | 28 | 36 | 50 |
| <br>E Cables and conductors on plank                              |                              | 4.0  | 5.0  | 7.1 | 9.1  | 11.5 | 16.1 | 22   | 30 | 37 | 52 |

Description according to DIN EN 60204 for PVC insulated copper wires with a working temperature of +40C. For other requirements,

such as for other temperatures, mountings, or wires corresponding correction factors are used (see next page).



# Technical Data

## Reduction Values

| Reduction values   | Chart 6                  |                  |
|--|--------------------------|------------------|
| <p>The values in chart 5 are based on an ambient temperature of 40 °C.<br/>For other ambient temperatures the values have to be adjusted using the correction values of chart 6 below.</p> <p>For installations with many cables and conductors under load the current carrying capacity is reduced according to the two following charts 7 and 8.</p> | Ambient temperature (°C) | Correction value |
|  | 30                       | 1.15             |
|  | 35                       | 1.03             |
|  | 40                       | 1.00             |
|  | 45                       | 0.91             |
|  | 50                       | 0.82             |
|  | 55                       | 0.71             |
|  | 60                       | 0.58             |

**Chart 7: Reduction values for accumulated conductors**

| Installation type                                     | Number of cables and conductors / pairs under load |      |      |      |
|---|--|------|------|------|
|   | 2  | 4    | 6    | 9    |
| Three phase cable and conductor                       |  |      |      |      |
| B1 and B2   | 0.80   | 0.85 | 0.87 | 0.86 |
| C   | 0.65   | 0.75 | 0.78 | 0.76 |
| E-one row   | 0.57   | 0.72 | 0.75 | 0.72 |
| E-multi row   | 0.50   | 0.70 | 0.73 | 0.88 |
| DC conductor (pair), independent of installation type | 1.0  | 0.76 | 0.64 | 0.43 |

**Chart 8: Reduction values for multicore cable and conductors up to 10mm<sup>2</sup>**

| Number of conductors (pairs) under load | AC (conductor > 1 mm <sup>2</sup> ) | DC (Pairs 0,2 to 0,75 mm <sup>2</sup> ) |
|---|-------------------------------------|---|
| 5                                       | 0.75                                | 0.52                                    |
| 7                                       | 0.65                                | 0.45                                    |
| 10                                      | 0.55                                | 0.39                                    |
| 24                                      | 0.40                                | 0.27                                    |

Conductors of control circuits generally do not need a reduction.

### Impulse current carrying capacity

A surge can happen to a connector and its contacts by an impulse current, e.g. through a short circuit in the system or by switching operations. The short-timed high current heat cannot be transferred outside fast enough so the contacts

are stressed by the high temperature which in the worst case can lead to a local weld. The robust design of our connectors prevents most damage by impulse currents.

### Voltage grading of connectors

#### General

Clearances and creepage distances are the base for voltage grading of connectors. Valuation and dimensioning of clearances and creepage distances have changed since the introduction of insulation coordination.

Insulation coordination comprises the selection of the electrical insulation performances of the equipment, taking into account the expected use and its environment.


The following standards apply for this:

IEC 60664-1/10.92  
Insulation coordination for equipment within low-voltage systems

DIN VDE 0110-1/4.97  
Isolationskoordination für elektrische Betriebsmittel in Niederspannungsanlagen

# Technical Data

## Voltage Grading of Connectors

| Clearances   |  |  |     |     |     |
|--|--|--|-----|-----|-----|
| <p>The clearance is the shortest distance in air between two conductive parts. An important point for the dimensioning of clearances is the determination of the overvoltage category. The above standard specifies the possible overvoltages into the four following categories:</p> <p><b>Overvoltage category I</b><br/>Equipment intended for the use in appliances or parts of installations in which no overvoltage can occur. Examples are low-voltage equipment.</p> <p><b>Overvoltage category II</b><br/>Equipment intended for the use in installations or parts of it in which lightning overvoltages do not need to be considered, but switching overvoltages generated by the equipment do need to be considered. Examples are household appliances.</p> <p>Once the overvoltage category has been defined the rated impulse withstand voltage can be selected for the equipment based on the nominal voltage of the supply system and the overvoltage category using chart 9 below:</p> |  | <p><b>Overvoltage category III</b><br/>Equipment intended for the use in installations or parts of it in which lightning overvoltages do not need to be considered, however switching overvoltages generated by the equipment, and for cases where the reliability and the availability of the equipment or its dependent circuits are subject to special requirements. Examples are protecting means, switches and sockets.</p> <p><b>Overvoltage category IV</b><br/>Equipment intended for the use in installations or parts of it in which lightning overvoltage has to be considered. Examples are electricity meters, overcurrent protection switches.</p>   |     |     |     |
| Chart 9  |  |  |     |     |     |
| Nominal voltage of the supply system in V (based on IEC 60038)   |  | Rated impulse voltage in kV for overvoltage category   |     |     |     |
| Three phase systems  |  | IV   | III | II  | I   |
| 230/400 277/480  |  | 6  | 4   | 2,5 | 1,5 |
| 400/690  |  | 8  | 6   | 4   | 2,5 |
| 1000   |  | 12   | 8   | 6   | 4   |
| <p>After the rated impulse withstand voltage has been selected the pollution degree must be defined taking the expected pollution around the equipment into account. The following four degrees of pollution are established: After the rated impulse withstand voltage has been selected the pollution degree must be defined taking the expected pollution around the equipment into account. The following four degrees of pollution are established:</p> <p><b>Pollution degree 1</b><br/>No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.</p> <p><b>Pollution degree 2</b><br/>Only non-conductive pollution occurs except occasionally a temporary conductivity caused by condensation is to be expected.</p> <p><b>Pollution degree 3</b><br/>Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.</p>  |  | <p><b>Pollution degree 4</b><br/>The pollution generates persistent conductivity caused by conductive dust or by rain or snow.</p> <p> It has to be noted that for a connector or plug and socket device with a degree of protection of min. IP 54 the parts inside the enclosure may be dimensioned for a lower pollution degree. This also applies to mated connectors which enclosure is ensured through the connector housing and which may only be disengaged for test and maintenance purposes. When impulse withstand voltage and the pollution degree are defined the minimum clearances can be selected from chart 10.</p> |     |     |     |

# Technical Data

## Voltage Grading of Connectors (cont.)

**Chart 10**

| Impulse withstand voltage in kV | Minimum clearances in air in mm up to 2000 m above sea level |      |     |     |                            |      |     |     |
|---------------------------------|--|------|-----|-----|----------------------------|------|-----|-----|
|                                 | Case A (non homogeneous field)                               |      |     |     | Case B (homogeneous field) |      |     |     |
|                                 | Pollution degree   |      |     |     | Pollution degree           |      |     |     |
|                                 | 1  | 2    | 3   | 4   | 1                          | 2    | 3   | 4   |
| 0.33                            | 0.01   | 0.2  | 0.8 | 1.6 | 0.01                       | 0.2  | 0.8 | 1.6 |
| 0.40                            | 0.02   |      |     |     | 0.02                       |      |     |     |
| 0.50                            | 0.04   |      |     |     | 0.04                       |      |     |     |
| 0.60                            | 0.06   |      |     |     | 0.06                       |      |     |     |
| 0.80                            | 0.10   |      |     |     | 0.1                        |      |     |     |
| 1.0                             | 0.15   |      |     |     | 0.15                       |      |     |     |
| 1.2                             | 0.25   | 0.25 | 1.0 | 2   | 0.2                        | 0.3  | 1.2 |     |
| 1.5                             | 0.5  |      |     |     | 0.3                        |      |     |     |
| 2.0                             | 1.0  | 1.0  | 1.0 | 3   | 0.45                       | 0.45 | 3   |     |
| 2.5                             | 1.5  | 1.5  | 1.5 | 4   | 0.6                        | 0.6  | 4   |     |
| 3.0                             | 2  | 2    | 2   | 5   | 0.8                        | 0.8  | 5   |     |
| 4.0                             | 3  | 3    | 3   | 6   | 1.2                        | 1,2  | 6   |     |
| 5.0                             | 4  | 4    | 4   | 7   | 1.5                        | 1.5  | 7   |     |
| 6.0                             | 5.5  | 5.5  | 5.5 | 8   | 2                          | 2    | 8   |     |
| 8.0                             | 8  | 8    | 8   | 10  | 3                          | 3    | 10  |     |
| 10                              | 11   | 11   | 11  | 12  | 3.5                        | 3.5  | 12  |     |
| 12                              | 14   | 14   | 14  | 15  | 4.5                        | 4.5  | 15  |     |
| 15                              | 18   | 18   | 18  | 20  | 5.5                        | 5.5  | 20  |     |
| 20                              | 25   | 25   | 25  | 25  | 8                          | 8    | 25  |     |
| 25                              | 33   | 33   | 33  | 30  | 10                         | 10   | 30  |     |
| 30                              | 40   | 40   | 40  | 35  | 12.5                       | 12.5 | 35  |     |
| 40                              | 60   | 60   | 60  | 45  | 17                         | 17   | 45  |     |
| 50                              | 75   | 75   | 75  | 60  | 22                         | 22   | 60  |     |
| 60                              | 90   | 90   | 90  | 75  | 27                         | 27   | 75  |     |
| 80                              | 130  | 130  | 130 | 100 | 35                         | 35   | 100 |     |
| 100                             | 170  | 170  | 170 | 150 | 45                         | 45   | 150 |     |

When defining the minimum clearances for connectors generally the values of the inhomogeneous field can be chosen or the required clearance has to be defined by a voltage test.

### Creepage distances

The creepage distance is the shortest distance along the surface of the insulating material between two conductive parts. For the dimensioning of the creepage distance the following factors are taken into account: the rated voltage, the pollution degree and the tracking formation of the insulating material.

The materials are separated into four groups according to their CTI values (Comparative Tracking Index):

- Material group I  $600 \leq \text{CTI}$
- Material group II  $400 \leq \text{CTI} < 600$
- Material group IIIa  $175 \leq \text{CTI} < 400$
- Material group IIIb  $100 \leq \text{CTI} < 175$

The minimum creepage distances can be selected from chart 11 .

# Technical Data

## Creepage Distance

Chart 11

| U-eff<br>Rated<br>voltage<br>U in V | Min. creepage distance in mm |       |                  |      |      |      |                  |      |      |      |                  |      |      |      |      |
|-------------------------------------|------------------------------|-------|------------------|------|------|------|------------------|------|------|------|------------------|------|------|------|------|
|                                     | Printed circuits             |       | Other devices    |      |      |      |                  |      |      |      |                  |      |      |      |      |
|                                     | Pollution degree             |       | Pollution degree |      |      |      | Pollution degree |      |      |      | Pollution degree |      |      |      |      |
|                                     | 1                            | 2     | 1                | 2    |      |      | 3                |      |      |      | 4                |      |      |      |      |
|                                     | 2)                           | 3)    | 2)               | I    | II   | IIIa | IIIb             | I    | II   | IIIa | IIIb             | I    | II   | IIIa | IIIb |
| 10                                  | 0.025                        | 0.04  | 0.08             | 0.4  | 0.4  | 0.4  |                  | 1    | 1    | 1    |                  | 1.6  | 1.6  | 1.6  |      |
| 12.5                                | 0.025                        | 0.04  | 0.09             | 0.42 | 0.42 | 0.42 |                  | 1.05 | 1.05 | 1.05 |                  | 1.6  | 1.6  | 1.6  |      |
| 16                                  | 0.025                        | 0.04  | 0.1              | 0.45 | 0.45 | 0.45 |                  | 1.1  | 1.1  | 1.1  |                  | 1.6  | 1.6  | 1.6  |      |
| 20                                  | 0.025                        | 0.04  | 0.11             | 0.48 | 0.48 | 0.48 |                  | 1.2  | 1.2  | 1.2  |                  | 1.6  | 1.6  | 1.6  |      |
| 25                                  | 0.025                        | 0.04  | 0.125            | 0.5  | 0.5  | 0.5  |                  | 1.25 | 1.25 | 1.25 |                  | 1.7  | 1.7  | 1.7  |      |
| 32                                  | 0.025                        | 0.04  | 0.14             | 0.53 | 0.53 | 0.53 |                  | 1.3  | 1.3  | 1.3  |                  | 1.8  | 1.8  | 1.8  |      |
| 40                                  | 0.025                        | 0.04  | 0.16             | 0.56 | 0.8  | 1.1  |                  | 1.4  | 1.6  | 1.8  |                  | 1.9  | 2.4  | 3    |      |
| 50                                  | 0.025                        | 0.04  | 0.18             | 0.6  | 0.85 | 1.2  |                  | 1.5  | 1.7  | 1.9  |                  | 2    | 2.5  | 3.2  |      |
| 63                                  | 0.04                         | 0.063 | 0.2              | 0.63 | 0.9  | 1.25 |                  | 1.6  | 1.8  | 2    |                  | 2.1  | 2.6  | 3.4  |      |
| 80                                  | 0.063                        | 0.1   | 0.22             | 0.67 | 0.95 | 1.3  |                  | 1.7  | 1.9  | 2.1  |                  | 2.2  | 2.8  | 3.6  |      |
| 100                                 | 0.1                          | 0.16  | 0.25             | 0.71 | 1    | 1.4  |                  | 1.8  | 2    | 2.2  |                  | 2.4  | 3.0  | 3.8  |      |
| 125                                 | 0.16                         | 0.25  | 0.28             | 0.75 | 1.05 | 1.5  |                  | 1.9  | 2.1  | 2.4  |                  | 2.5  | 3.2  | 4    |      |
| 160                                 | 0.25                         | 0.4   | 0.32             | 0.8  | 1.1  | 1.6  |                  | 2    | 2.2  | 2.5  |                  | 3.2  | 4    | 5    |      |
| 200                                 | 0.4                          | 0.63  | 0.42             | 1    | 1.4  | 2    |                  | 2.5  | 2.8  | 3.2  |                  | 4    | 5    | 6.3  |      |
| 250                                 | 0.56                         | 1     | 0.56             | 1.25 | 1.8  | 2.5  |                  | 3.2  | 3.6  | 4    |                  | 5    | 6.3  | 8    |      |
| 320                                 | 0.75                         | 1.6   | 0.75             | 1.6  | 2.2  | 3.2  |                  | 4    | 4.5  | 5    |                  | 6.3  | 8    | 10   |      |
| 400                                 | 1                            | 2     | 1                | 2    | 2.8  | 4    |                  | 5    | 5.6  | 6.3  |                  | 8    | 10   | 12.5 |      |
| 500                                 | 1.3                          | 2.5   | 1.3              | 2.5  | 3.6  | 5    |                  | 6.3  | 7.1  | 8.0  |                  | 10   | 12.5 | 16   |      |
| 630                                 | 1.8                          | 3.2   | 1.8              | 3.2  | 4.5  | 6.3  |                  | 8    | 9    | 10   |                  | 12.5 | 16   | 20   |      |
| 800                                 | 2.4                          | 4     | 2.4              | 4    | 5.6  | 8    |                  | 10   | 11   | 12.5 |                  | 16   | 20   | 25   |      |
| 1000                                | 3.2                          | 5     | 3.2              | 5    | 7.1  | 10   |                  | 12.5 | 14   | 16   |                  | 20   | 25   | 32   |      |
| 1250                                |                              |       | 4.2              | 6.3  | 9    | 12.5 |                  | 16   | 18   | 20   |                  | 25   | 32   | 40   |      |
| 1600                                |                              |       | 5.6              | 8    | 11   | 16   |                  | 20   | 22   | 25   |                  | 32   | 40   | 50   |      |
| 2000                                |                              |       | 7.5              | 10   | 14   | 20   |                  | 25   | 28   | 32   |                  | 40   | 50   | 63   |      |
| 2500                                |                              |       | 10               | 12.5 | 18   | 25   |                  | 32   | 36   | 40   |                  | 50   | 63   | 80   |      |
| 3200                                |                              |       | 12.5             | 16   | 22   | 32   |                  | 40   | 45   | 50   |                  | 63   | 80   | 100  |      |
| 4000                                |                              |       | 16               | 20   | 28   | 40   |                  | 50   | 56   | 63   |                  | 80   | 100  | 125  |      |
| 5000                                |                              |       | 20               | 25   | 36   | 50   |                  | 63   | 71   | 80   |                  | 100  | 125  | 160  |      |
| 6300                                |                              |       | 25               | 32   | 45   | 63   |                  | 80   | 90   | 100  |                  | 125  | 160  | 200  |      |
| 8000                                |                              |       | 32               | 40   | 56   | 80   |                  | 100  | 110  | 125  |                  | 160  | 200  | 250  |      |
| 10000                               |                              |       | 40               | 50   | 71   | 100  |                  | 125  | 140  | 160  |                  | 200  | 250  | 320  |      |

Connectors in this catalogue are allocated to fixed rated voltages which apply to the machine building industry. In case of other applications the above chart can be used to determine other rated voltages.

# Appendix

## Glossary of Terms

|  |  |
|--|--|
| <b>American Wire Gauge (AWG)</b>   | <b>Connector life</b>  |
| System of numerical designations for wire sizes, based on specified ranges of cross-sectional areas. Starts with 4/0 (000) at the largest size, going to 3/0, 2/0, 1/0, 1, 2, and up to 40 and beyond for the smallest size. A step of one AWG number corresponds to a reduction of cross-sectional area of appr. 20 %.  | The number of mating cycles prior to abrasion of the conductive contact surface and which does not result in a significant rise of the contact resistance. Tests according to test 9a of ICE 60512-5 / DIN EN 60512 Part 5.  |
| <b>Attenuation</b>   | <b>Contact</b>   |
| A reduction of power. Occurs naturally when waves travel through lines, wave guides, or media such as air or water. Is produced additionally by imperfections in electrical or optical connections (attenuation in fibre optics), e. g. contact resistance, mismatch, etc.   | The conductive element in a connector which mates with a corresponding element to provide an electrical path.  |
| <b>Bulkhead connector</b>  | <b>Contact resistance</b>  |
| Connector designed to be inserted into a panel cutout from the rear of the panel, thus forming part of the barrier between two spaces. Back-mounted.   | The electrical resistance of a mated set of contacts under specified conditions. Tested according to tests 2a, 2b, 2c, of IEC 60 512 -2/ DIN EN 60 512-2.  |
| <b>Clearance</b>   | <b>Contact size</b>  |
| The shortest distance in air between two conductive parts, see IEC 60664.  | The designation used to differentiate one contact from another. It may be denoted by one of the following numbering systems:   |
| <b>Climatic stability</b>  | <b>Creepage distance</b>   |
| General term describing the behavior of components under various climatic conditions, e. g. high and low temperatures, tropical climate, high humidity, moist heat, fungus, atmospheric conditions (industrial atmosphere), reduced air pressure, etc. Climatic conditions for test purposes are explained in IEC 60068, DIN 46 040.   | The shortest distance along the surface of the insulating material between two conductive parts. The longer the distance, the less the risk of arc damage or tracking. Minimum creepage distances are specified according to the rated voltage and the applicable pollution degree and Comparative Tracking Index. |
| <b>Connector</b>   | <b>Crimped connection</b>  |
| A component which terminates conductors for the purpose of providing connection and disconnection to a suitable mating component which shall not be engaged or disengaged when live. Depending on the fastening to a cabinet, panel, rack etc. or a cable, they are classified as fixed or free connectors. A connector comprises one or more contacts and a housing which may have a separate connector insert and a separate outer housing or shell. | A solderless connection made by crimping. IEC 60352-2 / DIN IEC 60352 Part 2.  |
| <b>Connector housing</b>   | <b>Derating curve</b>  |
| The part of a connector into which the insert and the contacts are assembled. It may function as part of the locking mechanism.  | The method for determining derating is specified in IEC 60 512-3. Here the combination of ambient temperature (Tu) and the current (J) leading to the same maximum allowable temperature (Tb) at the hottest point of the connector are plotted.   |
| <b>Connector insert</b>  | <b>DIN</b>   |
| An insulating element designed to support and position contacts in a connector housing. In connectors electromagnetic interference is prevented by shielding. Shielded connectors normally provide means to connect the screens of attached cables.  | Deutsches Institut für Normung. A German standards organization.   |
|  | <b>Electromagnetic interference (EMI)</b>  |
|  | General term describing the undesirable effects of the immission or emission of radio frequency fields.  |
|  | <b>Funnel entry (restricted entry C146 D series)</b>   |
|  | Flared or widened entrance to a conductor barrel permitting easier insertion of the conductor.   |
|  | <b>Insertion or withdrawal force</b>   |
|  | The force required to fully insert or withdraw a set of mated connectors without the effect of coupling, locking or similar devices. The insertion force is usually greater than the withdrawal force.   |

# Appendix

## Connector Glossary

|  |  |
|--|--|
| <b>Insulation grip</b>   | <b>Shield, shielding</b>   |
| The area of a crimp contact that has been reshaped around the insulation of the conductor by compression during the crimping operation.  | Shielding of internal or external electric fields by means of a plane with a uniform electric potential, formed by metal shells or metallic layers on the inside or outside of plastic shells. The shield is normally connected to the shielding braid of the cable and/or chassis ground. |
| <b>Insulation resistance</b>   | <b>Terminal block</b>  |
| The resistance of the insulation between two conductive elements, in particular, the resistance between two contacts or between a contact and a metallic housing or shield. Tested according to test 3a of IEC 60512-2 / DIN IEC 60512 Part 2.   | An assembly of terminals in a housing or body of insulating material to facilitate interconnection between multiple conductors. Also called terminal strip or barrier blocks if the terminals are separated by an insulation barrier.  |
| <b>Intermateable</b>   | <b>Wire range</b>  |
| Two connectors are intermateable when they are capable of being connected electrically and mechanically but without regard to their performance and intermountability.   | The range of wire cross sections which is compatible with the dimensions the terminals of the contact (wire barrel). The wire range is expressed in mm <sup>2</sup> or in AWG numbers.   |
| <b>Locator</b>   |  |
| In a crimping tool the device used for positioning a crimp contact or terminal end.  |  |
| <b>Locking lever</b>   |  |
| A mechanical locking device operated by actuating a lever, designed to hold two mated connectors together. Typically the lever can only be fully locked if the two connectors are correctly mated.   |  |
| <b>Mating cycle</b>  |  |
| One mating cycle comprises one insertion and one withdrawal operation. Term used in the definition of connector life.  |  |
| <b>Material group</b>  |  |
| Classification of insulation materials according to their CTI values (CTI = Comparative Tracking Index)  |  |
| <b>Overvoltage category</b>  |  |
| A numeral defining a transient overvoltage condition. Overvoltage categories I, II, III and IV are used.   |  |
| <b>Connector with braking capacity (CBC)</b>   |  |
| A component which may be engaged or disengaged in normal use, when live or under load. Note: In the sense of this document the term - live- is used if contacts are under voltage not necessarily with a current flowing across the contacts. The term - load - is used if a current is flowing across the contacts. |  |
| <b>Rated current</b>   |  |
| A current value assigned by the manufacturer which the connector or PSD can carry continuously (without interruption) and simultaneously through all its contacts wired with the largest conductor preferably at an ambient temperature of 40 °C without the upper temperature being exceeded.                       |  |



# Appendix

## Part Number Index (1-MS)

|                    |                     |                    |                         |                    |                     |                    |                 |
|--------------------|---------------------|--------------------|-------------------------|--------------------|---------------------|--------------------|-----------------|
| 108039110.....     | 33,41,75            | MFX-3957.....      | 27,34,45,53             | MP16M12E09G5.....  | 205                 | MP28W23G5.....     | 43,76,116,      |
| 108039112.....     | 25,51,83,           |                    | 77,85,93,109,           | MP16M12E09G10..... | 205                 |                    | 132,156,172,208 |
|                    | 91,115              |                    | 117,125,133,141,        | MP16M12E09G15..... | 205                 | MP28W23G10.....    | 43,76,116,      |
| 108039114.....     | 61,123,131,         |                    | 149,157,165,173,        | MP16M12E09G30..... | 205                 |                    | 132,156,172,208 |
|                    | 171                 |                    | 177,212                 | MP16M23F.....      | 26,34,42,           | MP28W23G15.....    | 43,76,116,      |
| 108039116.....     | 69,107,139,         | MFX-3958.....      | 45,77,117,              |                    | 52,84,92,           |                    | 132,156,172,208 |
|                    | 155                 |                    | 133,157,173,212         |                    | 108,124,140,        | MP28W23G30.....    | 43,76,116,      |
| 108039118.....     | 101,147             | MFX-3959.....      | 26,35,43                |                    | 148,164,176,207     |                    | 132,156,172,208 |
| 108039120.....     | 163                 |                    | 52,76,84,92,108,        | MP16M23G5.....     | 26,34,42,           | MS6ARS8S.....      | 210             |
| 108039122.....     | 174                 |                    | 116,124,132,140,        |                    | 52,84,92,           | MS10A23S.....      | 68,207          |
| A114017.....       | 61,101,107,         |                    | 148,156,164,172,176,212 |                    | 108,124,140,        | MS10B12E05F.....   | 205             |
|                    | 171                 | MFX-3960.....      | 26,35,43,52,            |                    | 148,164,176,207     | MS10B12E05G5.....  | 205             |
| A114017-SR.....    | 25,33,41,51,        |                    | 76,84,92,108,           | MP16M23G10.....    | 26,34,42,           | MS10B12E05G10..... | 205             |
|                    | 83,91,107,139,      |                    | 116,124,132,140,        |                    | 52,84,92,           | MS10B12E05G15..... | 205             |
|                    | 147,163,171,174     |                    | 148,156,164,172,        |                    | 108,124,140,        | MS10B12E05G30..... | 205             |
| AT13-204-2005..... | 41,75,115,          |                    | 176,212                 | MP16M23G15.....    | 26,34,42,           | MS10B12E08F.....   | 205             |
|                    | 123,131,155         | MFX-3962.....      | 53,60,100,              |                    | 52,84,92,           | MS10B12E08G5.....  | 205             |
| HP10ACS.....       | 210,214             |                    | 109,212                 | MP16M23G30.....    | 26,34,42,           | MS10B12E08G10..... | 205             |
| HP25BCS.....       | 183,210             | MP10A23S.....      | 68,207                  |                    | 52,84,92,           | MS10B12E08G15..... | 205             |
| HP35CCS.....       | 187,210             | MP10B12E05F.....   | 205                     | MP16M23G30.....    | 26,34,42,           | MS10B12E08G30..... | 205             |
| HP50CCS.....       | 187,210             | MP10B12E05G5.....  | 205                     |                    | 52,84,92,           | MS14M23F.....      | 26,34,42,       |
| HP50DCS.....       | 191,210             | MP10B12E05G10..... | 205                     |                    | 108,124,140,        |                    | 52,84,92,       |
| HP70DCS.....       | 191,210             | MP10B12E05G15..... | 205                     |                    | 108,124,140,        |                    | 108,124,140,    |
| HP95DCS.....       | 191,210             | MP10B12E05G30..... | 205                     | MP24M23F.....      | 26,34,42,52,        | MS14M23G5.....     | 26,34,42,       |
| HPAHS.....         | 179,210             | MP10B12E08F.....   | 205                     |                    | 84,92,108,124,      |                    | 52,84,92,       |
| HPASS.....         | 210                 | MP10B12E08G5.....  | 205                     |                    | 140,148,164,176,208 |                    | 108,124,140,    |
| HPBHS.....         | 183,210             | MP10B12E08G10..... | 205                     | MP24M23G5.....     | 26,34,42,52,        |                    | 148,164,176,207 |
| HPBSS.....         | 183,210             | MP10B12E08G15..... | 205                     |                    | 84,92,108,          | MS14M23G10.....    | 26,34,42,       |
| HPCHS.....         | 187,210             | MP10B12E08G30..... | 205                     |                    | 124,140,148,        |                    | 52,84,92,       |
| HPCSS.....         | 187,210             | MP14M23F.....      | 26,34,42,               |                    | 164,176,208         |                    | 108,124,140,    |
| HPDHS.....         | 191,210             |                    | 52,84,92,               | MP24M23G10.....    | 26,34,42,52,        |                    | 148,164,176,207 |
| HPDSS.....         | 191,210             |                    | 108,124,140,            |                    | 84,92,108,          | MS14M23G15.....    | 26,34,42,       |
| HS10ACS.....       | 210,214             |                    | 148,164,176,207         |                    | 124,140,148,        |                    | 52,84,92,       |
| HS25BCS.....       | 183,210             | MP14M23G5.....     | 26,34,42                |                    | 164,176,208         |                    | 108,124,140,    |
| HS25CCS.....       | 187,210             |                    | 52,84,92,               | MP24M23G15.....    | 26,34,42,52,        |                    | 148,164,176,207 |
| HS25DCS.....       | 191,210             |                    | 108,124,140,            |                    | 84,92,108,          | MS14M23G30.....    | 26,34,42,       |
| HS35CCS.....       | 187,210             |                    | 148,164,176,207         |                    | 124,140,148,        |                    | 52,84,92,       |
| HS35DCS.....       | 191,210             | MP14M23G10.....    | 26,34,42,               |                    | 164,176,208         |                    | 108,124,140,    |
| HS50CCS.....       | 187,210             |                    | 52,84,92,               | MP24M23G30.....    | 26,34,42,52,        |                    | 148,164,176,207 |
| HS50DCS.....       | 191,210             |                    | 108,124,140,            |                    | 84,92,108,          | MS16M12E06F.....   | 204             |
| HS70DCS.....       | 191,210             |                    | 148,164,176,207         |                    | 124,140,148,        | MS16M12E06G5.....  | 204             |
| HS95DCS.....       | 191,210             | MP14M23G15.....    | 26,34,42,               |                    | 164,176,208         | MS16M12E06G10..... | 204             |
| HTAHS.....         | 210                 |                    | 52,84,92,               | MP24W23F.....      | 43,76,116,132,      | MS16M12E06G15..... | 204             |
| HTASS.....         | 210                 |                    | 108,124,140,            |                    | 156,172,208         | MS16M12E06G30..... | 204             |
| HTBHS.....         | 210                 | MP14M23G30.....    | 26,34,42,               | MP24W23G5.....     | 43,76,116,          | MS16M12E09F.....   | 204             |
| HTBSS.....         | 210                 |                    | 52,84,92,               |                    | 132,156,172,208     | MS16M12E09G5.....  | 205             |
| HSCHS.....         | 210                 |                    | 108,124,140,            | MP24W23G10.....    | 43,76,116,          | MS16M12E09G10..... | 205             |
| HSCSS.....         | 210                 |                    | 148,164,176,207         |                    | 132,156,172,208     | MS16M12E09G15..... | 205             |
| HSDHS.....         | 210                 | MP16M12E06F.....   | 204                     | MP24W23G15.....    | 43,76,116,          | MS16M12E09G30..... | 205             |
| HSDSS.....         | 210                 | MP16M12E06G5.....  | 204                     |                    | 132,156,172,208     | MS16M23F.....      | 26,34,42,       |
| MFX-3954.....      | 27,34,45,53         | MP16M12E06G10..... | 204                     | MP24W23G30.....    | 43,76,116,          |                    | 52,84,92,       |
|                    | 85,93,109,125,      | MP16M12E06G15..... | 204                     |                    | 132,156,172,208     |                    | 108,124,140,    |
|                    | 141,149,165,177,212 | MP16M12E06G30..... | 204                     | MP28W23F.....      | 43,76,116,          |                    | 148,164,176,207 |
|                    |                     | MP16M12E09F.....   | 204                     |                    | 132,156,172,208     |                    |                 |

# Appendix

## Part Number Index (MS -RTOW )

|  |   |                                       |                        |
|--|---|---------------------------------------|------------------------|
| MS16M23G5.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207  | MS20W23G30...43,76,116,<br>132,156,172,208  | RB00011910.....33,41,75               | RTOW01210PNH.....111   |
| MS16M23G10.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24M23F.....26,34,42,52,<br>84,92,108,<br>124,140,148,<br>164,176,208                                      | RB00011912.....25,83,115              | RTOW01210PNHEC.....111 |
| MS16M23G15.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24M23G5.....26,34,42,52,<br>84,92,108,<br>124,140,148,<br>164,176,208                                     | RB00011914.....51,61,91,<br>123,131   | RTOW01210PNH-K.....111 |
| MS16M23G30.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24M23G10.....26,34,42,<br>52,84,92,<br>108,124,140,148,<br>164,176,208                                    | RB00011916.....69,107,<br>139,155     | RTOW01210SNH.....111   |
| MS20M23F.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207   | MS24M23G15.....26,34,42,<br>52,84,92,<br>108,124,140,148,<br>164,176,208                                    | RB00011918.....101,147,171            | RTOW01210SNHEC.....111 |
| MS20M23G5.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207  | MS24M23G30.....26,34,42,<br>52,84,92,<br>108,124,140,148,<br>164,176,208                                    | RB00011920.....163                    | RTOW01210SNH-K.....111 |
| MS20M23G10.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24W23F.....43,76,116,<br>132,156,172,208  | RT0B-12CG-S1.....21,79,111            | RTOW01419PNH.....127   |
| MS20M23G15.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24W23G5.....43,76,116,<br>132,156,172,208   | RT0B-12CG-S2.....21,79,111            | RTOW01419PNHEC.....127 |
| MS20M23G30.....26,34,42,<br>52,84,92,<br>108,124,140,<br>148,164,176,207 | MS24W23G10.....43,76,116,<br>132,156,172,208  | RT0B-14CG-S1.....47,55,<br>87,119,127 | RTOW01419PNH-K.....127 |
| MS20W12E06F.....204  | MS24W23G15.....43,76,116,<br>132,156,172,208  | RT0B-14CG-S2.....47,55,<br>87,119,127 | RTOW01419SNH.....127   |
| MS20W12E06G5.....204   | MS24W23G30.....43,76,116,<br>132,156,172,208  | RT0B-16CG-S1.....63,103,<br>135,151   | RTOW01419SNHEC.....127 |
| MS20W12E06G10.....204  | MS28W23F.....43,76,116,<br>132,156,172,208  | RT0B-16CG-S2.....63,103,<br>135,151   | RTOW01419SNH-K.....127 |
| MS20W12E06G15.....204  | MS28W23G5.....43,76,116,<br>132,156,172,208   | RTOL-10CG-S1.....29,37,71             | RTOW01626PNH.....151   |
| MS20W12E06G30.....204  | MS28W23G10.....43,76,116,<br>132,156,172,208  | RTOL-10CG-S2.....29,37,71             | RTOW01626PNHEC.....151 |
| MS20W12E09F.....204  | MS28W23G15.....43,76,116,<br>132,156,172,208  | RTOL-12CG-S1.....21,79,111            | RTOW01626PNH-K.....151 |
| MS20W12E09G5.....204   | MS28W23G30.....43,76,116,<br>132,156,172,208  | RTOL-12CG-S2.....21,79,111            | RTOW01626SNH.....151   |
| MS20W12E09G10.....204  | QXRT08.....68   | RTOL-14CG-S1.....47,55,87,<br>119,127 | RTOW01626SNHEC.....151 |
| MS20W12E09G15.....204  | QXRT08R.....68,180,198  | RTOL-14CG-S2.....47,55,87,<br>119,127 | RTOW01626SNH-K.....151 |
| MS20W12E09G30.....204  | QXRT12S.....52,53,60,<br>100,109  | RTOL-16CG-S1.....63,103,<br>135,151   | RTOW01626SNH-K.....151 |
| MS20W23F.....43,76,116,<br>132,156,172,208                               | QXRT16.....26,27,34,35,<br>43,45,53,84,85,92,<br>93,108,109,124,125,<br>140,141,148,149,164,<br>165,176,177 | RTOL-16CG-S2.....63,103,<br>135,151   | RTOW01626SNH-K.....151 |
| MS20W23G5.....43,76,116,<br>132,156,172,208                              | QXRT20.....43,45,76,77,<br>116,117,132,133,<br>156,157,172,173  | RTOL-18CG-S1.....95,143,167           | RTOW01832PNH.....167   |
| MS20W23G10.....43,76,116,<br>132,156,172,208                             |   | RTOL-18CG-S2.....95,143,167           | RTOW01832PNHEC.....167 |
| MS20W23G15.....43,76,116,<br>132,156,172,208                             |   | RTOL-20CPG-S5.....159                 | RTOW01832PNH-K.....167 |
|  |   | RTOL-20CPG-S6.....159                 | RTOW01832SNH.....167   |
|  |   | RTOS-10CG-S1.....29,37,71             | RTOW01832SNHEC.....167 |
|  |   | RTOS-10CG-S2.....29,37,71             | RTOW01832SNH-K.....167 |
|  |   | RTOS-12CG-S1.....21,79,111            | RTOW6106PNH.....71     |
|  |   | RTOS-12CG-S2.....21,79,111            | RTOW6106PNHEC.....71   |
|  |   | RTOS-14CG-S1.....47,55,87,<br>119,127 | RTOW6106PNH-K.....71   |
|  |   | RTOS-14CG-S2.....47,55,87,<br>119,127 | RTOW6106SNH.....71     |
|  |   | RTOS-16CG-S1.....63,103,<br>135,151   | RTOW6106SNHEC.....71   |
|  |   | RTOS-16CG-S2.....63,103,<br>135,151   | RTOW6106SNH-K.....71   |
|  |   | RTOS-18CG-S1.....95,143,167           | RTOW7106PNH.....71     |
|  |   | RTOS-18CG-S2.....95,143,167           | RTOW7106PNHEC.....71   |
|  |   | RTOW0106PNH.....71                    | RTOW7106PNH-K.....71   |
|  |   | RTOW0106PNHEC.....71                  | RTOW7106SNH.....71     |
|  |   | RTOW0106PNH-K.....71                  | RTOW7106SNHEC.....71   |
|  |   | RTOW0106SNH.....71                    | RTOW7106SNH-K.....71   |
|  |   | RTOW0106SNHEC.....71                  | RTOW61210PNH.....111   |
|  |   | RTOW0106SNH-K.....71                  | RTOW61210PNHEC.....111 |
|  |   |                                       | RTOW61210PNH-K.....111 |
|  |   |                                       | RTOW61210SNH.....111   |
|  |   |                                       | RTOW61210SNHEC.....111 |
|  |   |                                       | RTOW61210SNH-K.....111 |
|  |   |                                       | RTOW61419PNH.....127   |
|  |   |                                       | RTOW61419PNHEC.....127 |
|  |   |                                       | RTOW61419PNH-K.....127 |
|  |   |                                       | RTOW61419SNH.....127   |
|  |   |                                       | RTOW61419SNHEC.....127 |
|  |   |                                       | RTOW61419SNH-K.....127 |
|  |   |                                       | RTOW61626PNH.....151   |
|  |   |                                       | RTOW61626PNHEC.....151 |
|  |   |                                       | RTOW61626PNH-K.....151 |
|  |   |                                       | RTOW61626SNH.....151   |
|  |   |                                       | RTOW61626SNHEC.....151 |
|  |   |                                       | RTOW61626SNH-K.....151 |

# Appendix

## Part Number Index (RT0W -RT0)

|                     |                  |                   |     |                    |     |                    |     |
|---------------------|------------------|-------------------|-----|--------------------|-----|--------------------|-----|
| RT0W61832PNH.....   | 167              | RT00102PNHEC..... | 37  | RT610DCG.....      | 75  | RT002028SNH.....   | 159 |
| RT0W61832PNHEC..... | 167              | RT00102PNHEC..... | 37  | RT612DC.....       | 25  | RT002028SNHEC..... | 159 |
| RT0W61832PNH-K..... | 167              | RT00102PNH-K..... | 37  | RT612DC.....       | 83  | RT002028SNH-K..... | 159 |
| RT0W61832SNH.....   | 167              | RT00102SNH.....   | 37  | RT612DC.....       | 115 | RT002448PNH.....   | 174 |
| RT0W61832SNHEC..... | 167              | RT00102SNHEC..... | 37  | RT612DCG.....      | 25  | RT002448SNH.....   | 174 |
| RT0W61832SNH-K..... | 167              | RT00102SNHEC..... | 37  | RT612DCG.....      | 83  | RT06102PNH.....    | 37  |
| RT0W71210PNH.....   | 111              | RT00102SNH-K..... | 37  | RT612DCG.....      | 115 | RT06102PNHEC.....  | 37  |
| RT0W71210PNHEC..... | 111              | RT00104PNH.....   | 29  | RT614DC.....       | 51  | RT06102SNH.....    | 37  |
| RT0W71210PNH-K..... | 111              | RT00104PNHEC..... | 29  | RT614DC.....       | 61  | RT06102SNHEC.....  | 37  |
| RT0W71210SNH.....   | 111              | RT00104PNH-K..... | 29  | RT614DC.....       | 91  | RT06104PNH.....    | 29  |
| RT0W71210SNHEC..... | 111              | RT00104SNH.....   | 29  | RT614DC.....       | 123 | RT06104PNHEC.....  | 29  |
| RT0W71210SNH-K..... | 111              | RT00104SNHEC..... | 29  | RT614DC.....       | 131 | RT06104PNH-K.....  | 29  |
| RT0W71419PNH.....   | 127              | RT00104SNH-K..... | 29  | RT614DCG.....      | 51  | RT06104SNH.....    | 29  |
| RT0W71419PNHEC..... | 127              | RT00123PNH.....   | 21  | RT614DCG.....      | 61  | RT06104SNHEC.....  | 29  |
| RT0W71419PNH-K..... | 127              | RT00123PNHEC..... | 21  | RT614DCG.....      | 91  | RT06104SNH-K.....  | 29  |
| RT0W71419SNH.....   | 127              | RT00123PNH-K..... | 21  | RT614DCG.....      | 123 | RT06123PNH.....    | 21  |
| RT0W71419SNHEC..... | 127              | RT00123SNH.....   | 21  | RT614DCG.....      | 131 | RT06123PNHEC.....  | 21  |
| RT0W71419SNH-K..... | 127              | RT00123SNHEC..... | 21  | RT616DC.....       | 69  | RT06123PNH-K.....  | 21  |
| RT0W71626PNH.....   | 151              | RT00123SNH-K..... | 21  | RT616DC.....       | 107 | RT06123SNH.....    | 21  |
| RT0W71626PNHEC..... | 151              | RT00128PNH.....   | 79  | RT616DC.....       | 139 | RT06123SNHEC.....  | 21  |
| RT0W71626PNH-K..... | 151              | RT00128PNHEC..... | 79  | RT616DC.....       | 155 | RT06123SNH-K.....  | 21  |
| RT0W71626SNH.....   | 151              | RT00128PNH-K..... | 79  | RT616DCG.....      | 69  | RT06128PNH.....    | 79  |
| RT0W71626SNHEC..... | 151              | RT00128SNH.....   | 79  | RT616DCG.....      | 107 | RT06128PNHEC.....  | 79  |
| RT0W71626SNH-K..... | 151              | RT00128SNHEC..... | 79  | RT616DCG.....      | 139 | RT06128PNH-K.....  | 79  |
| RT0W71832PNH.....   | 167              | RT00128SNH-K..... | 79  | RT616DCG.....      | 155 | RT06128SNH.....    | 79  |
| RT0W71832PNHEC..... | 167              | RT00142PNH.....   | 47  | RT616DCG.....      | 171 | RT06128SNHEC.....  | 79  |
| RT0W71832PNH-K..... | 167              | RT00142PNHEC..... | 47  | RT618DC.....       | 101 | RT06128SNH-K.....  | 79  |
| RT0W71832SNH.....   | 167              | RT00142SNH.....   | 47  | RT618DC.....       | 147 | RT06142PNH.....    | 47  |
| RT0W71832SNHEC..... | 167              | RT00142SNH.....   | 47  | RT618DC.....       | 171 | RT06142PNHEC.....  | 47  |
| RT0W71832SNH-K..... | 167              | RT00142SNHEC..... | 47  | RT618DCG.....      | 101 | RT06142PNH.....    | 47  |
| RT010DC.....        | 33,41,75         | RT00144PNH.....   | 55  | RT618DCG.....      | 147 | RT06142SNH.....    | 47  |
| RT010DCG.....       | 33,41,75         | RT00144PNHEC..... | 55  | RT618DCG.....      | 171 | RT06142SNHEC.....  | 47  |
| RT010RL.....        | 33,41,75         | RT00144SNH.....   | 55  | RT620DC.....       | 163 | RT06144PNH.....    | 55  |
| RT012DC.....        | 25,83,115        | RT00144SNHEC..... | 55  | RT620DCG.....      | 163 | RT06144PNHEC.....  | 55  |
| RT012DCG.....       | 25,83,115        | RT00148PNH.....   | 87  | RT001412PNH.....   | 119 | RT06144SNH.....    | 55  |
| RT012RL.....        | 25,83,115        | RT00148PNHEC..... | 87  | RT001412PNHEC..... | 119 | RT06144SNHEC.....  | 55  |
| RT014DC.....        | 51,61,91,123,131 | RT00148SNH.....   | 87  | RT001412PNH-K..... | 119 | RT06148PNH.....    | 87  |
| RT014DCG.....       | 51,61,91,123,131 | RT00148SNHEC..... | 87  | RT001412SNH.....   | 119 | RT06148PNHEC.....  | 87  |
| RT014RL.....        | 51,61,91,123,131 | RT00164PNH.....   | 63  | RT001412SNH.....   | 119 | RT06148SNH.....    | 87  |
| RT016DC.....        | 69,107,139,155   | RT00164PNHEC..... | 63  | RT001412SNH-K..... | 119 | RT06148SNHEC.....  | 87  |
| RT016DCG.....       | 69,107,139,155   | RT00164SNH.....   | 63  | RT001619PNH.....   | 135 | RT06164PNH.....    | 63  |
| RT016RL.....        | 69,107,139,155   | RT00164SNHEC..... | 63  | RT001619PNHEC..... | 135 | RT06164PNHEC.....  | 63  |
| RT018DC.....        | 101,147,171      | RT00169PNH.....   | 103 | RT001619PNH-K..... | 135 | RT06164SNH.....    | 63  |
| RT018DCG.....       | 101,147,171      | RT00169PNHEC..... | 103 | RT001619SNH.....   | 135 | RT06164SNHEC.....  | 63  |
| RT018RL.....        | 101,147,171      | RT00169SNH.....   | 103 | RT001619SNH.....   | 135 | RT06188PNH.....    | 95  |
| RT020DC.....        | 163              | RT00169SNHEC..... | 103 | RT001619SNHEC..... | 135 | RT06188PNHEC.....  | 95  |
| RT020DCG.....       | 163              | RT00188PNH.....   | 95  | RT001619SNH-K..... | 135 | RT06188SNH.....    | 95  |
| RT020RL.....        | 163              | RT00188PNHEC..... | 95  | RT001823PNH.....   | 143 | RT06188SNHEC.....  | 95  |
| RT00102PNH.....     | 37               | RT00188SNH.....   | 95  | RT001823PNHEC..... | 143 | RT07102PNH.....    | 37  |
| RT00102PNHEC.....   | 37               | RT00188SNH.....   | 95  | RT001823PNH-K..... | 143 | RT07102PNHEC.....  | 37  |
| RT00102PNH-K.....   | 37               | RT00188SNHEC..... | 95  | RT001823SNH.....   | 143 | RT07102SNH.....    | 37  |
| RT00102SNH.....     | 37               | RT610DC.....      | 33  | RT001823SNHEC..... | 143 | RT07102SNHEC.....  | 37  |
| RT00102SNHEC.....   | 37               | RT610DC.....      | 41  | RT001823SNH-K..... | 143 | RT07104PNH.....    | 29  |
| RT00102SNH-K.....   | 37               | RT610DC.....      | 75  | RT002028PNH.....   | 159 | RT07104PNHEC.....  | 29  |
| RT00104PNH.....     | 29               | RT610DCG.....     | 33  | RT002028PNHEC..... | 159 | RT07104PNH-K.....  | 29  |
| RT00104PNHEC.....   | 29               | RT610DCG.....     | 41  | RT002028PNH-K..... | 159 |                    |     |
| RT00104PNH-K.....   | 29               |                   |     |                    |     |                    |     |
| RT00104SNH.....     | 29               |                   |     |                    |     |                    |     |
| RT00104SNHEC.....   | 29               |                   |     |                    |     |                    |     |
| RT00104SNH-K.....   | 29               |                   |     |                    |     |                    |     |
| RT00123PNH.....     | 21               |                   |     |                    |     |                    |     |
| RT00123PNHEC.....   | 21               |                   |     |                    |     |                    |     |
| RT00123PNH-K.....   | 21               |                   |     |                    |     |                    |     |
| RT00123SNH.....     | 21               |                   |     |                    |     |                    |     |
| RT00123SNHEC.....   | 21               |                   |     |                    |     |                    |     |
| RT00123SNH-K.....   | 21               |                   |     |                    |     |                    |     |
| RT00128PNH.....     | 79               |                   |     |                    |     |                    |     |
| RT00128PNHEC.....   | 79               |                   |     |                    |     |                    |     |
| RT00128PNH-K.....   | 79               |                   |     |                    |     |                    |     |
| RT00128SNH.....     | 79               |                   |     |                    |     |                    |     |
| RT00128SNHEC.....   | 79               |                   |     |                    |     |                    |     |
| RT00128SNH-K.....   | 79               |                   |     |                    |     |                    |     |
| RT00142PNH.....     | 47               |                   |     |                    |     |                    |     |
| RT00142PNHEC.....   | 47               |                   |     |                    |     |                    |     |
| RT00142SNH.....     | 47               |                   |     |                    |     |                    |     |
| RT00142SNHEC.....   | 47               |                   |     |                    |     |                    |     |
| RT00144PNH.....     | 55               |                   |     |                    |     |                    |     |
| RT00144PNHEC.....   | 55               |                   |     |                    |     |                    |     |
| RT00144SNH.....     | 55               |                   |     |                    |     |                    |     |
| RT00144SNHEC.....   | 55               |                   |     |                    |     |                    |     |
| RT00148PNH.....     | 87               |                   |     |                    |     |                    |     |
| RT00148PNHEC.....   | 87               |                   |     |                    |     |                    |     |
| RT00148SNH.....     | 87               |                   |     |                    |     |                    |     |
| RT00148SNHEC.....   | 87               |                   |     |                    |     |                    |     |
| RT00164PNH.....     | 63               |                   |     |                    |     |                    |     |
| RT00164PNHEC.....   | 63               |                   |     |                    |     |                    |     |
| RT00164SNH.....     | 63               |                   |     |                    |     |                    |     |
| RT00164SNHEC.....   | 63               |                   |     |                    |     |                    |     |
| RT00169PNH.....     | 103              |                   |     |                    |     |                    |     |
| RT00169PNHEC.....   | 103              |                   |     |                    |     |                    |     |
| RT00169SNH.....     | 103              |                   |     |                    |     |                    |     |
| RT00169SNHEC.....   | 103              |                   |     |                    |     |                    |     |
| RT00188PNH.....     | 95               |                   |     |                    |     |                    |     |
| RT00188PNHEC.....   | 95               |                   |     |                    |     |                    |     |
| RT00188SNH.....     | 95               |                   |     |                    |     |                    |     |
| RT00188SNHEC.....   | 95               |                   |     |                    |     |                    |     |
| RT610DC.....        | 33               |                   |     |                    |     |                    |     |
| RT610DC.....        | 41               |                   |     |                    |     |                    |     |
| RT610DC.....        | 75               |                   |     |                    |     |                    |     |
| RT610DCG.....       | 33               |                   |     |                    |     |                    |     |
| RT610DCG.....       | 41               |                   |     |                    |     |                    |     |
| RT612DC.....        | 25               |                   |     |                    |     |                    |     |
| RT612DC.....        | 83               |                   |     |                    |     |                    |     |
| RT612DC.....        | 115              |                   |     |                    |     |                    |     |
| RT612DCG.....       | 25               |                   |     |                    |     |                    |     |
| RT612DCG.....       | 83               |                   |     |                    |     |                    |     |
| RT612DCG.....       | 115              |                   |     |                    |     |                    |     |
| RT614DC.....        | 51               |                   |     |                    |     |                    |     |
| RT614DC.....        | 61               |                   |     |                    |     |                    |     |
| RT614DC.....        | 91               |                   |     |                    |     |                    |     |
| RT614DC.....        | 123              |                   |     |                    |     |                    |     |
| RT614DC.....        | 131              |                   |     |                    |     |                    |     |
| RT614DCG.....       | 51               |                   |     |                    |     |                    |     |
| RT614DCG.....       | 61               |                   |     |                    |     |                    |     |
| RT614DCG.....       | 91               |                   |     |                    |     |                    |     |
| RT614DCG.....       | 123              |                   |     |                    |     |                    |     |
| RT614DCG.....       | 131              |                   |     |                    |     |                    |     |
| RT616DC.....        | 69               |                   |     |                    |     |                    |     |
| RT616DC.....        | 107              |                   |     |                    |     |                    |     |
| RT616DC.....        | 139              |                   |     |                    |     |                    |     |
| RT616DC.....        | 155              |                   |     |                    |     |                    |     |
| RT616DCG.....       | 69               |                   |     |                    |     |                    |     |
| RT616DCG.....       | 107              |                   |     |                    |     |                    |     |
| RT616DCG.....       | 139              |                   |     |                    |     |                    |     |
| RT616DCG.....       | 155              |                   |     |                    |     |                    |     |
| RT618DC.....        | 101              |                   |     |                    |     |                    |     |
| RT618DC.....        | 147              |                   |     |                    |     |                    |     |
| RT618DC.....        | 171              |                   |     |                    |     |                    |     |
| RT618DCG.....       | 101              |                   |     |                    |     |                    |     |
| RT618DCG.....       | 147              |                   |     |                    |     |                    |     |
| RT618DCG.....       | 171              |                   |     |                    |     |                    |     |
| RT620DC.....        | 163              |                   |     |                    |     |                    |     |
| RT620DCG.....       | 163              |                   |     |                    |     |                    |     |
| RT001412PNH.....    | 119              |                   |     |                    |     |                    |     |
| RT001412PNHEC.....  | 119              |                   |     |                    |     |                    |     |
| RT001412PNH-K.....  | 119              |                   |     |                    |     |                    |     |
| RT001412SNH.....    | 119              |                   |     |                    |     |                    |     |
| RT001412SNH.....    | 119              |                   |     |                    |     |                    |     |
| RT001412SNH-K.....  | 119              |                   |     |                    |     |                    |     |
| RT001619PNH.....    | 135              |                   |     |                    |     |                    |     |
| RT001619PNHEC.....  | 135              |                   |     |                    |     |                    |     |
| RT001619PNH-K.....  | 135              |                   |     |                    |     |                    |     |
| RT001619SNH.....    | 135              |                   |     |                    |     |                    |     |
| RT001619SNHEC.....  | 135              |                   |     |                    |     |                    |     |
| RT001619SNH-K.....  | 135              |                   |     |                    |     |                    |     |
| RT001823PNH.....    | 143              |                   |     |                    |     |                    |     |
| RT001823PNHEC.....  | 143              |                   |     |                    |     |                    |     |
| RT001823PNH-K.....  | 143              |                   |     |                    |     |                    |     |
| RT001823SNH.....    | 143              |                   |     |                    |     |                    |     |
| RT001823SNHEC.....  | 143              |                   |     |                    |     |                    |     |
| RT001823SNH-K.....  | 143              |                   |     |                    |     |                    |     |
| RT002028PNH.....    | 159              |                   |     |                    |     |                    |     |
| RT002028PNHEC.....  | 159              |                   |     |                    |     |                    |     |
| RT002028PNH-K.....  | 159              |                   |     |                    |     |                    |     |



# Appendix

## Part Number Index (RT0-SP)

|                    |     |                     |                |                        |   |                |   |
|--------------------|-----|---------------------|----------------|------------------------|---|----------------|---|
| RT07104SNH.....    | 29  | RT061823PNHEC.....  | 143            | RTHP0161PN-M1.....     | 187   | SP16M2G10..... | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07104SNHEC.....  | 29  | RT061823PNH-K.....  | 143            | RTHP0201PNH-50C.....   | 191   | SP16M2G30..... | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07104SNH-K.....  | 29  | RT061823SNH.....    | 143            | RTHP0201PNH-70C.....   | 191   | SP20M2F.....   | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07123PNH.....    | 21  | RT061823SNHEC.....  | 143            | RTHP0201PNH-95C.....   | 191   | SP20M2G5.....  | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07123PNHEC.....  | 21  | RT061823SNH-K.....  | 143            | RTHP0201PNH-H1.....    | 191   | SP20M2G10..... | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07123PNH-K.....  | 21  | RT062028PNH.....    | 159            | RTHP0201PNH-M1.....    | 191   | SP20M2G15..... | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07123SNH.....    | 21  | RT062028PNHEC.....  | 159            | RTHP0203PNH-16C.....   | 197   | SP20M2G30..... | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202     |
| RT07123SNH-K.....  | 21  | RT062028PNH-K.....  | 159            | RTHP0203SNH-16C.....   | 197   | SP20W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT07128PNH.....    | 79  | RT062028SNH.....    | 159            | RTHP6121SNH-16S2.....  | 179   | SP20W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT07128PNHEC.....  | 79  | RT062028SNHEC.....  | 159            | RTHP6141SNH25-BS2..... | 183   | SP20W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT07128PNH-K.....  | 79  | RT062448PNH.....    | 174            | RTHP6141SNH25-EC.....  | 183   | SP20W2G15..... | 45,77,117,<br>133,157,173,203                             |
| RT07128SNH.....    | 79  | RT062448SNH.....    | 174            | RTHP6141SNH25-PS2..... | 183   | SP24M2F.....   | 27,35,44,53,85,<br>93,109,125,141,<br>149,165,177,202     |
| RT07128SNHEC.....  | 79  | RT071412PNH.....    | 119            | RTHP6141SNH25-PS3..... | 183   | SP24M2G5.....  | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07128SNH-K.....  | 79  | RT071412PNHEC.....  | 119            | RTHP6161SNH25-PS2..... | 187   | SP24M2G10..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07142PNH.....    | 47  | RT071412PNH-K.....  | 119            | RTHP6161SNH35-PS2..... | 187   | SP24M2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07142PNHEC.....  | 47  | RT071412SNH.....    | 119            | RTHP6161SNH-35S2.....  | 187   | SP24M2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07142SNH.....    | 47  | RT071412SNHEC.....  | 119            | RTHP6201SNH25-PS2..... | 191   | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT07142SNHEC.....  | 47  | RT071412SNH-K.....  | 119            | RTHP6201SNH35-PS2..... | 191   | SP24W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT07144PNH.....    | 55  | RT071609PNH.....    | 103            | RTHP6201SNH50-PS2..... | 191   | SP24W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT07144PNHEC.....  | 55  | RT071609SNH.....    | 103            | RTHP6201SNH70-PS1..... | 191   | SP24W2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07144SNH.....    | 55  | RT071619PNH.....    | 135            | RTHP6201SNH70-PS2..... | 191   | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07144SNHEC.....  | 55  | RT071619PNHEC.....  | 135            | RTHP6201SNH95-PS2..... | 191   | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT07148PNH.....    | 87  | RT071619PNH-K.....  | 135            | RTHP6203PNH-16S2.....  | 197   | SP24W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT07148PNHEC.....  | 87  | RT071619SNH.....    | 135            | RTHP6203SNH-16S2.....  | 197   | SP24W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT07148SNH.....    | 87  | RT071619SNHEC.....  | 135            | SP12A1T.....           | 53,60,<br>100,109,202                                 | SP24W2G15..... | 45,77,117,<br>133,157,173,203                             |
| RT07148SNHEC.....  | 87  | RT071619SNH-K.....  | 135            | SP14M2F.....           | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2F.....   | 27,35,44,53,85,<br>93,109,125,141,<br>149,165,177,202     |
| RT07164PNH.....    | 63  | RT071823PNH.....    | 143            | SP14M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2G5.....  | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07164PNHEC.....  | 63  | RT071823PNHEC.....  | 143            | SP14M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2G10..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07164SNH.....    | 63  | RT071823PNH-K.....  | 143            | SP14M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07164SNHEC.....  | 63  | RT071823SNH.....    | 143            | SP14M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07169PNHEC.....  | 103 | RT071823SNHEC.....  | 143            | SP16M2F.....           | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24M2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT07169SNHEC.....  | 103 | RT071823SNH-K.....  | 143            | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT07188PNH.....    | 95  | RT072028PNH.....    | 159            | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT07188PNHEC.....  | 95  | RT072028PNHEC.....  | 159            | SP16M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT07188SNH.....    | 95  | RT072028PNH-K.....  | 159            | SP16M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT07188SNHEC.....  | 95  | RT072028SNH.....    | 159            | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061412PNH.....   | 119 | RT072028SNHEC.....  | 159            | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061412PNHEC..... | 119 | RT072028SNH-K.....  | 159            | SP16M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061412PNH-K..... | 119 | RTFD10B.....        | 33,41,75       | SP16M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT061412SNH.....   | 119 | RTFD12B.....        | 25,83,91,115   | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT061412SNHEC..... | 119 | RTFD14B.....        | 51,61,123,131  | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061412SNH-K..... | 119 | RTFD16B.....        | 69,107,139,155 | SP16M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061609PNH.....   | 103 | RTFD18B.....        | 101,147,171    | SP16M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061609PNHEC..... | 103 | RTFD20B.....        | 163            | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061609SNH.....   | 103 | RTFD24B.....        | 174            | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061609SNHEC..... | 103 | RTHP0121PN-16C..... | 179            | SP16M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061619PNH.....   | 135 | RTHP0121PN-H1.....  | 179            | SP16M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G5.....  | 45,77,117,<br>133,157,173,203                             |
| RT061619PNHEC..... | 135 | RTHP0141PN-25C..... | 183            | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G10..... | 45,77,117,<br>133,157,173,203                             |
| RT061619PNH-K..... | 135 | RTHP0141PN-H1.....  | 183            | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061619SNH.....   | 135 | RTHP0141PN-M1.....  | 183            | SP16M2G15.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061619SNHEC..... | 135 | RTHP0161PN-35C..... | 187            | SP16M2G30.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2F.....   | 45,77,117,<br>133,157,173,203                             |
| RT061619SNH-K..... | 135 | RTHP0161PN-50C..... | 187            | SP16M2G5.....          | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G15..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |
| RT061823PNH.....   | 143 | RTHP0161PN-H1.....  | 187            | SP16M2G10.....         | 27,35,44,53,<br>85,93,109,125,141,<br>149,165,177,202 | SP24W2G30..... | 27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |

# Appendix

## Part Number Index (SP-SS)

|  |  |   |
|--|--|---|
| SP24W2G10.....45,77,117,<br>133,157,173,203                            | SS16M2G30...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24W2F.....45,77,117,<br>133,157,173,203                       |
| SP24W2G15.....45,77,117,<br>133,157,173,203                            | SS20M2F.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24W2G5.....45,77,117,<br>133,157,173,203                      |
| SP24W2G30.....45,77,117,<br>133,157,173,203                            | SS20M2G5...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202   | SS24W2G10.....45,77,117,<br>133,157,173,203                     |
| SP28W2F.....45,77,117,<br>133,157,173,203                              | SS20M2G10...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24W2G30.....45,77,117,<br>133,157,173,203                     |
| SP28W2G5.....45,77,117,<br>133,157,173,203                             | SS20M2G15...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS28W2F.....45,77,117,<br>133,157,173,203                       |
| SP28W2G10.....45,77,117,<br>133,157,173,203                            | SS20M2G30...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS28W2G5.....45,77,117,<br>133,157,173,203                      |
| SP28W2G15.....45,77,117,<br>133,157,173,203                            | SS20W2F.....45,77,117,<br>133,157,173,203                              | SS28W2G10.....45<br>SS28W2G10.....45,77,117,<br>133,157,173,203 |
| SP28W2G30.....45,77,117,<br>133,157,173,203                            | SS20W2G5.....45,77,117,<br>133,157,173,203                             | SS28W2G15.....45,77,117,<br>133,157,173,203                     |
| SS12A1T.....53,60,100,<br>109,202                                      | SS20W2G10.....45,77,117,<br>133,157,173,203                            | SS28W2G30.....45,77,117,<br>133,157,173,203                     |
| SS14M2F.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS20W2G15.....45,77,117,<br>133,157,173,203                            |   |
| SS14M2G5.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 | SS20W2G30...445,77,117,<br>133,157,173,203                             |   |
| SS14M2G10...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24M2F.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  |   |
| SS14M2G15...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24M2G5.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 |   |
| SS14M2G30...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24M2G10...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,203  |   |
| SS16M2F.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  | SS24M2G15...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,203  |   |
| SS16M2G5.....27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202 | SS24M2G30...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,203  |   |
| SS16M2G10...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  |  |   |
| SS16M2G15...27,35,44,53,<br>85,93,109,125,<br>141,149,165,<br>177,202  |  |   |







## USA

**Amphenol Sine Systems**  
44724 Morley Drive  
Clinton Township, MI 48036  
Toll-Free: 1-800-394-7732  
Fax: 1-586-465-1216  
Email: [csr@amphenol-sine.com](mailto:csr@amphenol-sine.com)  
[www.amphenol-sine.com](http://www.amphenol-sine.com)

## Germany

**Amphenol Tuchel GmbH**  
August-Haesser-Strasse 10  
Heilbronn, Germany 74080  
Phone: 49(0)-7131-929-0  
Fax: 49(0)-7131-929-486  
Email: [info@amphenol.de](mailto:info@amphenol.de)  
[www.amphenol.de](http://www.amphenol.de)

## China

**Amphenol Sine Systems**  
Building 21, 1st Liao Keng Industrial Zone,  
Shi Yan Street, Bao An District  
Shenzhen, China 518180  
Tel: 86-755-8173-8000 ext. 8098  
Fax: 86-755-8173-8180  
[www.amphenol-sine.com.cn](http://www.amphenol-sine.com.cn)

## USA

**Amphenol Corporation**  
**Corporate Headquarters**  
358 Hall Ave  
Wallingford Ct 06492  
Phone: (877) 267-4366  
[www.amphenol.com](http://www.amphenol.com)

## United Kingdom

**Amphenol LIMITED**  
Thanet Way, Whitstable  
Kent CT5 3JF, United Kingdom  
Phone: 44-1-227-773200  
Fax: 44-1-227-276571  
[www.amphenol.co.uk](http://www.amphenol.co.uk)

## India

**Amphenol INTERCONNECT INDIA PVT LTD**  
105 Bhosari Industrial Area  
Pune 411 026, India  
Phone: +91 20 67360304  
Fax: +91 20 67360321  
[www.amphenol-in.com](http://www.amphenol-in.com)

## Mexico

**Prolongacion Reforma 61-6 B2**  
Col. Paseo de las Lomas  
C.P. 01330 Mexico DF, Mexico  
Phone: 52-55-5258-9984  
Fax: 52-55-5081-6890  
Email: [info@amphenolmexico.com](mailto:info@amphenolmexico.com)  
[www.amphenolmexico.com](http://www.amphenolmexico.com)

## Australia

**Amphenol AUSTRALIA PTY LIMITED**  
2 Fiveways Blvd., Keysborough  
Melbourne, Victoria 3173 Australia  
Phone: 613-8796-8888  
Fax: 613-8796-8801  
[www.amphenol.com.au](http://www.amphenol.com.au)

## Korea

**Amphenol DAESHIN**  
558. Songnae-2 Dong, SoSa-Gu  
Bucheon City, Gyeonggi-do,  
Korea 422-818  
Phone: 81-32-610-3800  
Fax: 81-32-673-2507  
Email: [info@amphenol.co.kr](mailto:info@amphenol.co.kr)  
[www.amphenol.co.kr](http://www.amphenol.co.kr)

## Argentina

**Amphenol ARGENTINA**  
Avenida Callao 930  
2nd floor Office B Plaza  
C1023AAP Buenos Aires, Argentina  
Phone: 54-11-4815-6886  
Fax: 54-11-4814-5779  
Email: [info@amphenol.com.ar](mailto:info@amphenol.com.ar)  
[amphenol.com.ar](http://amphenol.com.ar)

## Turkey

**Amphenol International Ltd Turkey**  
Sun Plaza Kat. 15  
Maslak Mah. Bilim Sok. No. 5  
34398 Sisli / Istanbul – Turkey  
Tel: + 90 212 367.92.20  
Fax: + 90 212 367.92.21  
[www.amphenol.com.tr](http://www.amphenol.com.tr)

## Japan

**Amphenol JAPAN**  
471-1, Deba, Ritto-city  
shiga 520-3041, Japan  
Phone: 81-77-553-8501  
Fax: 81-77-551-2200  
[www.amphenol.co.jp](http://www.amphenol.co.jp)

## Brazil

**Amphenol do Brasil Ltda**  
Rua Diogo Moreira, 132  
20 Andar, Rooms 2001-2-3  
CEP 05423-101  
Sao Paulo- SP, Brazil  
Phone: 55-11-3815-1003  
Fax: 55-11-3815-1629  
[www.amphenol.com.br](http://www.amphenol.com.br)

## South Africa

**Amphenol International Ltd**  
**South Africa**  
30 Impala Road  
2196 Sandton, Chislehurst  
South Africa  
Phone: 27-11-783-9517  
Fax: 27-11-783-9519  
Email: [sales@amphenolafrica.com](mailto:sales@amphenolafrica.com)  
[www.amphenol.com.za](http://www.amphenol.com.za)

## Russia

**Amphenol RUSSIA**  
8 Yaroslavskaja Street  
129164 Moscow, Russia  
Phone: 7495-937-6341  
Fax: 7495-937-6319  
[www.amphenol.ru](http://www.amphenol.ru)

## France

**Amphenol SOCAPEX**  
948, Promenade de l'Arve - BP 29  
74311 Thyez CEDEX, France  
Phone: 33(0)4-50-89-28-40  
Fax: 33(0)4-50-96-29-75  
[www.amphenol-socapex.com](http://www.amphenol-socapex.com)